



DUNLOP



English



Español



Italiano



Deutsch



Français



Nederlands



Polskie

V & Wedge Belts Introduction

9

Introducción de correas V y la cuña • Introduzione V & cuneo cinture

V & Keilriemen Einführung • Introduction de ceintures V & Wedge

V & wig riemen introductie • V & Pasy klinowe Wprowadzenie

V-Belts Wrapped

10

V-Belts envueltos • V-cinture avvolto • -Keilriemen eingewickelt

Courroies trapézoïdales enveloppées • V-snaren verpakt • Pasy klinowe Owinięty

V-Belts Raw Edge Cogged

16

Dentada del borde crudo V-Belts • Bordo grezzo cinghie dentate

Raw Edge-Keilriemen gezahnt • Courroies trapézoïdales bord brut dentée

V-snaren ruwe rand getand • Pasy klinowe Raw krawędzi zębate

V-Belts Automotive

18

Correas automotrices • Cinghie Automotive • -Keilriemen Kfz

Courroies automobiles • V-snaren Automotive • Pasy klinowe Automotive

V-Belts Agricultural

20

Correas agrícolas • Cinghie trapezoidali agricoli • V-snaren landbouw

Courroies agricoles • V-snaren landbouw • Pasy klinowe rolne

V-Belts Variable Speed

23

Correas de velocidad Variable • Cinghie variatore di velocità

Variable Drehzahl-Keilriemen • Courroies trapézoïdales à Vitesse Variable

V-snaren variabele snelheid • Pasy klinowe bezstopniowe

V-Belts & Wedge Belts Banded

25

Correas en V y correas trapeciales bandas • Cinghie trapezoidali & cuneo

cinture fasciate • -Keilriemen & gebändert Keilriemen • Courroies trapézoïdales

& Wedge ceintures bagués • V-snaren & wig riemen Banded • Pasy klinowe

Pasy klinowe i Banded

V-Belts Link Wrapped

29

Enlace V-Belts envuelto • Cinghie trapezoidali Link avvolto • Keilriemen Link

gewickelt • Lien de courroies trapézoïdales enveloppée • Keilriemen eingewickelt

Pasy klinowe link Owinięty

Wedge Belts Wrapped

30

Correas trapeciales envuelto • Cinture di Cuneo avvolto • Keilriemen eingewickelt

Courroies de cale enveloppées • Wig riemen verpakt • Pasy klinowe Owinięty

Wedge Belts Raw Edge Cogged

35

Crudo borde Cogged cinturones de cuña • Bordo grezzo dentato cinture di Cuneo

Keil Gürtel Schnittkante gezahnt • Courroies de cale bord brut dentée • Wig gordels ruwe

rand getand • Pasy klinowe Raw krawędzi

V & WEDGE BELTS INTRODUCTION

DUNLOP V & WEDGE BELTS are manufactured in a polybutadiene compound. High variety of belt size availability permits the application of **DUNLOP V-BELTS** on all types of industrial equipments.

Applied technology allows good dimensional precision in the manufacture of **V-BELTS** to make them suitable for multiple transmissions. This dimensional stability continues also during belt use. V & Wedge Belts are developed with high resistant tensile elements, they are characterised by high performances, length stability during belt life, conductivity, oil and heat resistance. Wedge Belts are particularly suitable for centrifugal pumps, compressors, tool machines, generators, high power mills and stone mills and offer a good balance between price, performance and quality. They represent an affordable solution for transmission systems of all industrial sectors.

DUNLOP V & WEDGE BELTS offers the following features:

- Low maintenance
- Highly efficient
- No need for lubrication
- Extremely wide horsepower ranges
- Dampen vibration between driver and driven pulleys
- Silent operations
- Long service life
- Easy installation
- Reduction in drive dimension

CHEMICAL FEATURES

- Working temperature range -30°C to +80°C
- Resistance to oil and heat
- Antistatic properties to ISO 1813

Special construction are available on request.

MECHANICAL FEATURES

- Smooth starting and running
- Wide range of driven speeds, using standard electric motors



AGRICULTURAL V-BELTS

DUNLOP Agricultural V-Belts have been created for drives with small pulley diameters and high temperature peaks, combined with a high grade of moisture and humidity. They withstand the harshest environmental requirements such as oil and grease contaminated drives of transmissions where grits may interfere between pulleys and belt. Thanks to its characteristics Agricultural V-Belts perfectly match the requirements of clutching drives as the aramid cords protect the belt against shock loads while maintaining its length constant.

The rubber compound is specially designed for long lasting power transmissions working under hardest conditions. Belt cover uses latest technology in materials for a high resistance in clutching transmissions. Agricultural V-Belts are being used successfully in applications such as: Lawnmowers - Snow blowers - Garden equipment - Garden tractors, etc.



Description

V-Belts for industrial use are designated both to RMA standard e.g. A52, where the letter designates its cross-section and the number corresponds to a nominal internal length in inches and to DIN standard e.g. 13x1320Li, where the first number denotes the width in mm, and the second number is the internal length in mm.

Dunlop V-belts have specially treated jackets to give superior anti-static, heat and oil-resistant properties and are static conductive to ISO1813.



Part No.	Outside Length (mm)	Pitch Length (mm)	Inside Length (mm)	Inside Length (in)
Z15	419	403	381	15
Z16	444	428	406	16
Z16-1/2	457	441	419	16.5
Z17	470	454	432	17
Z18	495	479	457	18
Z19	521	505	483	19
Z19-1/2	533	517	495	19.5
Z20	546	530	508	20
Z20-1/2	559	543	521	20.5
Z21	571	555	533	21
Z21-1/4	578	562	540	21.25
Z21-1/2	584	568	546	21.5
Z21-3/4	590	574	552	21.75
Z22	597	581	559	22
Z22-1/4	603	587	565	22.25
Z22-1/2	610	594	572	22.5
Z23	622	606	584	23
Z23-1/2	635	619	597	23.5
Z23-3/4	641	625	603	23.75
Z24	648	632	610	24
Z24-1/2	660	644	622	24.5
Z24-3/4	667	651	629	24.75
Z25	673	657	635	25
Z25-1/2	686	670	648	25.5
Z26	698	682	660	26
Z26-1/2	711	695	673	26.5
Z27	724	708	686	27
Z27-1/2	737	721	699	27.5
Z28	749	733	711	28

Part No	Outside Length (mm)	Pitch Length (mm)	Inside Length (mm)	Inside Length (in)
Z28-1/2	762	746	724	28.5
Z29	775	759	737	29
Z29-1/2	787	771	749	29.5
Z30	800	784	762	30
Z30-1/2	813	797	775	30.5
Z30-3/4	819	803	781	30.75
Z31	825	809	787	31
Z31-1/2	838	822	800	31.5
Z32	851	835	813	32
Z32-1/2	864	848	826	32.5
Z33	876	860	838	33
Z33-1/2	889	873	851	33.5
Z34	902	886	864	34
Z34-1/4	908	892	870	34.25
Z34-1/2	914	898	876	34.5
Z35	927	911	889	35
Z35-1/2	940	924	902	35.5
Z36	952	936	914	36
Z36-1/2	965	949	927	36.5
Z36-3/4	971	955	933	36.75
Z37	978	962	940	37
Z37-1/2	991	975	953	37.5
Z38	1003	987	965	38
Z38-1/4	1010	994	972	38.25
Z38-1/2	1016	1000	978	38.5
Z39	1029	1013	991	39
Z39-1/2	1041	1025	1003	39.5
Z40	1054	1038	1016	40
Z40-1/2	1067	1051	1029	40.5

Part No	Outside Length (mm)	Pitch Length (mm)	Inside Length (mm)	Inside Length (in)
Z41	1079	1063	1041	41
Z41-1/2	1092	1076	1054	41.5
Z41-3/4	1098	1082	1060	41.75
Z42	1105	1089	1067	42
Z42-1/2	1118	1102	1080	42.5
Z43	1130	1114	1092	43
Z43-1/2	1143	1127	1105	43.5
Z44	1156	1140	1118	44
Z45	1181	1165	1143	45
Z45-1/2	1194	1178	1156	45.5
Z46	1206	1190	1168	46
Z46-1/2	1219	1203	1181	46.5
Z47	1232	1216	1194	47
Z47-3/4	1251	1235	1213	47.75
Z48	1257	1241	1219	48
Z49	1283	1267	1245	49
Z50	1308	1292	1270	50
Z50-1/2	1321	1305	1283	50.5
Z51	1333	1317	1295	51
Z52	1359	1343	1321	52
Z53	1384	1368	1346	53
Z54	1410	1394	1372	54
Z55	1435	1419	1397	55
Z56	1460	1444	1422	56
Z57	1486	1470	1448	57
Z58	1511	1495	1473	58
Z59	1537	1521	1499	59
Z59-1/2	1549	1533	1511	59.5
Z60	1562	1546	1524	60

Z - SECTION continued

Part No	Outside Length (mm)	Pitch Length (mm)	Inside Length (mm)	Inside Length (in)
Z61	1587	1571	1549	61
Z62	1613	1597	1575	62
Z63	1638	1622	1600	63
Z64	1664	1648	1626	64
Z65	1689	1673	1651	65
Z66	1714	1698	1676	66
Z67	1740	1724	1702	67
Z68	1765	1749	1727	68
Z68-1/2	1778	1762	1740	68.5

Part No	Outside Length (mm)	Pitch Length (mm)	Inside Length (mm)	Inside Length (in)
Z69	1791	1775	1753	69
Z70	1816	1800	1778	70
Z71	1841	1825	1803	71
Z73	1892	1876	1854	73
Z75	1943	1927	1905	75
Z77	1994	1978	1956	77
Z79	2045	2029	2007	79
Z80	2070	2054	2032	80
Z81	2095	2079	2057	81

Part No	Outside Length (mm)	Pitch Length (mm)	Inside Length (mm)	Inside Length (in)
Z82	2121	2105	2083	82
Z83	2146	2130	2108	83
Z87	2248	2232	2210	87
Z88	2273	2257	2235	88
Z93	2400	2384	2362	93
Z98	2527	2511	2489	98

A - SECTION

Part No	Outside Length (mm)	Pitch Length (mm)	Inside Length (mm)	Inside Length (in)
A15	431	411	381	15
A17-1/2	495	475	445	17.5
A18	507	487	457	18
A18-3/4	526	506	476	18.75
A19	533	513	483	19
A20	558	538	508	20
A21	583	563	533	21
A21-3/4	602	582	552	21.75
A22	609	589	559	22
A23	634	614	584	23
A23-1/2	647	627	597	23.5
A24	660	640	610	24
A24-1/2	672	652	622	24.5
A24-3/4	679	659	629	24.75
A25	685	665	635	25
A25-1/2	698	678	648	25.5
A26	710	690	660	26
A26-1/2	723	703	673	26.5
A27	736	716	686	27
A27-1/2	749	729	699	27.5
A28	761	741	711	28
A28-1/2	774	754	724	28.5
A29	787	767	737	29
A29-1/2	799	779	749	29.5
A30	812	792	762	30
A30-1/2	825	805	775	30.5
A31	837	817	787	31
A31-1/2	850	830	800	31.5
A32	863	843	813	32
A32-1/2	876	856	826	32.5
A33	888	868	838	33
A33-1/4	895	875	845	33.25

Part No	Outside Length (mm)	Pitch Length (mm)	Inside Length (mm)	Inside Length (in)
A33-1/2	901	881	851	33.5
A33-3/4	907	887	857	33.75
A34	914	894	864	34
A34-1/2	926	906	876	34.5
A35	939	919	889	35
A35-1/2	952	932	902	35.5
A36	964	944	914	36
A36-1/2	977	957	927	36.5
A37-1/2	1003	983	953	37.5
A37-1/4	996	976	946	37.25
A38	1015	995	965	38
A38-1/2	1028	1008	978	38.5
A39	1041	1021	991	39
A39-1/2	1053	1033	1003	39.5
A40	1066	1046	1016	40
A40-1/2	1079	1059	1029	40.5
A41	1091	1071	1041	41
A41-1/2	1104	1084	1054	41.5
A41-3/4	1110	1090	1060	41.75
A42	1117	1097	1067	42
A42-1/2	1130	1110	1080	42.5
A43	1142	1122	1092	43
A43-1/2	1155	1135	1105	43.5
A43-3/4	1161	1141	1111	43.75
A44	1168	1148	1118	44
A44-1/2	1180	1160	1130	44.5
A45	1193	1173	1143	45
A45-1/2	1206	1186	1156	45.5
A46	1218	1198	1168	46
A46-1/2	1231	1211	1181	46.5
A47	1244	1224	1194	47
A48	1269	1249	1219	48

Part No	Outside Length (mm)	Pitch Length (mm)	Inside Length (mm)	Inside Length (in)
A48-1/4	1276	1256	1226	48.25
A50	1320	1300	1270	50
A51	1345	1325	1295	51
A51-1/2	1358	1338	1308	51.5
A52	1371	1351	1321	52
A52-1/2	1384	1364	1334	52.5
A53	1396	1376	1346	53
A53-1/4	1403	1383	1353	53.25
A54	1422	1402	1372	54
A55	1447	1427	1397	55
A56	1472	1452	1422	56
A57	1498	1478	1448	57
A58	1523	1503	1473	58
A59	1549	1529	1499	59
A60	1574	1554	1524	60
A61	1599	1579	1549	61
A62	1625	1605	1575	62
A63	1650	1630	1600	63
A64	1676	1656	1626	64
A65	1701	1681	1651	65
A66	1726	1706	1676	66
A67	1752	1732	1702	67
A68	1777	1757	1727	68
A69	1803	1783	1753	69
A70	1828	1808	1778	70
A71	1853	1833	1803	71
A72	1879	1859	1829	72
A73	1904	1884	1854	73
A74	1930	1910	1880	74
A75	1955	1935	1905	75
A76	1980	1960	1930	76
A77	2006	1986	1956	77

A - SECTION continued

Part No	Outside Length (mm)	Pitch Length (mm)	Inside Length (mm)	Inside Length (in)
A78	2031	2011	1981	78
A79	2057	2037	2007	79
A80	2082	2062	2032	80
A81	2107	2087	2057	81
A82	2133	2113	2083	82
A83	2158	2138	2108	83
A83-1/2	2171	2151	2121	83.5
A84	2184	2164	2134	84
A85	2209	2189	2159	85
A86	2234	2214	2184	86
A87	2260	2240	2210	87
A88	2285	2265	2235	88
A89	2311	2291	2261	89
A90	2336	2316	2286	90
A91	2361	2341	2311	91
A92	2387	2367	2337	92
A93	2412	2392	2362	93
A94	2438	2418	2388	94
A95	2463	2443	2413	95
A96	2488	2468	2438	96
A97	2514	2494	2464	97
A97-1/2	2527	2507	2477	97.5
A98	2539	2519	2489	98
A99	2565	2545	2515	99

Part No	Outside Length (mm)	Pitch Length (mm)	Inside Length (mm)	Inside Length (in)
A100	2590	2570	2540	100
A102	2641	2621	2591	102
A103	2666	2646	2616	103
A104	2692	2672	2642	104
A105	2717	2697	2667	105
A106	2742	2722	2692	106
A107	2768	2748	2718	107
A108	2793	2773	2743	108
A110	2844	2824	2794	110
A112	2895	2875	2845	112
A113	2920	2900	2870	113
A114	2946	2926	2896	114
A115	2971	2951	2921	115
A116	2996	2976	2946	116
A117	3022	3002	2972	117
A118	3047	3027	2997	118
A120	3098	3078	3048	120
A124	3200	3180	3150	124
A128	3301	3281	3251	128
A130	3352	3332	3302	130
A132	3403	3383	3353	132
A134	3454	3434	3404	134
A136	3504	3484	3454	136
A138	3555	3535	3505	138

Part No	Outside Length (mm)	Pitch Length (mm)	Inside Length (mm)	Inside Length (in)
A140	3606	3586	3556	140
A144	3708	3688	3658	144
A147	3784	3764	3734	147
A148	3809	3789	3759	148
A150	3860	3840	3810	150
A154	3962	3942	3912	154
A155	3987	3967	3937	155
A158	4063	4043	4013	158
A160	4114	4094	4064	160
A162	4165	4145	4115	162
A167	4292	4272	4242	167
A173	4444	4424	4394	173
A177	4546	4526	4496	177
A180	4622	4602	4572	180
A187	4800	4780	4750	187
A197	5054	5034	5004	197
A210	5384	5364	5334	210
A217	5562	5542	5512	217

B - SECTION

Part No	Outside Length (mm)	Pitch Length (mm)	Inside Length (mm)	Inside Length (in)
B23	654	624	584	23
B24	680	650	610	24
B25	705	675	635	25
B26	730	700	660	26
B27	756	726	686	27
B28	781	751	711	28
B29	807	777	737	29
B30	832	802	762	30
B31	857	827	787	31
B32	883	853	813	32
B32-1/4	889	859	819	32.25
B32-1/2	896	866	826	32.5
B33	908	878	838	33

Part No	Outside Length (mm)	Pitch Length (mm)	Inside Length (mm)	Inside Length (in)
B33-1/2	921	891	851	33.5
B34	934	904	864	34
B34-1/2	946	916	876	34.5
B35	959	929	889	35
B35-1/2	972	942	902	35.5
B35-3/4	978	948	908	35.75
B36	984	954	914	36
B36-1/2	997	967	927	36.5
B36-3/4	1003	973	933	36.75
B37	1010	980	940	37
B37-1/2	1023	993	953	37.5
B38	1035	1005	965	38
B38-1/2	1048	1018	978	38.5

Part No	Outside Length (mm)	Pitch Length (mm)	Inside Length (mm)	Inside Length (in)
B39	1061	1031	991	39
B39-1/2	1073	1043	1003	39.5
B40	1086	1056	1016	40
B40-1/2	1099	1069	1029	40.5
B41	1111	1081	1041	41
B41-1/2	1124	1094	1054	41.5
B41-3/4	1130	1100	1060	41.75
B42	1137	1107	1067	42
B42-1/2	1150	1120	1080	42.5
B43	1162	1132	1092	43
B43-1/2	1175	1145	1105	43.5
B44	1188	1158	1118	44
B44-1/2	1200	1170	1130	44.5

B - SECTION continued

Part No	Outside Length (mm)	Pitch Length (mm)	Inside Length (mm)	Inside Length (in)
B44-1/4	1194	1164	1124	44.25
B45	1213	1183	1143	45
B46	1238	1208	1168	46
B46-1/2	1251	1221	1181	46.5
B46-3/4	1257	1227	1187	46.75
B47	1264	1234	1194	47
B47-1/2	1277	1247	1207	47.5
B47-1/4	1270	1240	1200	47.25
B48	1289	1259	1219	48
B48-1/2	1302	1272	1232	48.5
B49	1315	1285	1245	49
B49-1/2	1327	1297	1257	49.5
B50	1340	1310	1270	50
B50-1/2	1353	1323	1283	50.5
B51	1365	1335	1295	51
B52	1391	1361	1321	52
B52-1/2	1404	1374	1334	52.5
B53	1416	1386	1346	53
B53-1/2	1429	1399	1359	53.5
B54	1442	1412	1372	54
B55	1467	1437	1397	55
B55-1/2	1480	1450	1410	55.5
B56	1492	1462	1422	56
B56-1/2	1505	1475	1435	56.5
B57	1518	1488	1448	57
B58	1543	1513	1473	58
B59	1569	1539	1499	59
B60	1594	1564	1524	60
B61	1619	1589	1549	61
B61-1/2	1632	1602	1562	61.5
B62	1645	1615	1575	62
B63	1670	1640	1600	63
B64	1696	1666	1626	64
B64-1/2	1708	1678	1638	64.5
B65	1721	1691	1651	65
B66	1746	1716	1676	66
B66-1/2	1759	1729	1689	66.5
B66-1/4	1753	1723	1683	66.25
B67-1/4	1778	1748	1708	67.25
B67	1772	1742	1702	67
B68	1797	1767	1727	68
B69	1823	1793	1753	69
B69-1/2	1835	1805	1765	69.5
B70	1848	1818	1778	70
B71	1873	1843	1803	71
B72	1899	1869	1829	72

Part No	Outside Length (mm)	Pitch Length (mm)	Inside Length (mm)	Inside Length (in)
B73	1924	1894	1854	73
B74	1950	1920	1880	74
B75	1975	1945	1905	75
B76	2000	1970	1930	76
B77	2026	1996	1956	77
B78	2051	2021	1981	78
B78-1/2	2064	2034	1994	78.5
B79	2077	2047	2007	79
B79-1/2	2089	2059	2019	79.5
B80	2102	2072	2032	80
B80-3/4	2121	2091	2051	80.75
B81	2127	2097	2057	81
B82	2153	2123	2083	82
B82-1/2	2166	2136	2096	82.5
B83	2178	2148	2108	83
B83-1/2	2191	2161	2121	83.5
B84	2204	2174	2134	84
B84-1/2	2216	2186	2146	84.5
B85	2229	2199	2159	85
B86	2254	2224	2184	86
B86-1/2	2267	2237	2197	86.5
B87	2280	2250	2210	87
B88	2305	2275	2235	88
B88-1/2	2318	2288	2248	88.5
B89	2331	2301	2261	89
B90	2356	2326	2286	90
B90-1/2	2369	2339	2299	90.5
B91	2381	2351	2311	91
B91-1/2	2394	2364	2324	91.5
B92	2407	2377	2337	92
B93	2432	2402	2362	93
B94	2458	2428	2388	94
B95	2483	2453	2413	95
B96	2508	2478	2438	96
B96-1/2	2521	2491	2451	96.5
B97	2534	2504	2464	97
B97-1/2	2547	2517	2477	97.5
B98-1/2	2572	2542	2502	98.5
B98	2559	2529	2489	98
B99	2585	2555	2515	99
B100	2610	2580	2540	100
B101	2635	2605	2565	101
B102	2661	2631	2591	102
B103	2686	2656	2616	103
B104	2712	2682	2642	104
B105	2737	2707	2667	105

Part No	Outside Length (mm)	Pitch Length (mm)	Inside Length (mm)	Inside Length (in)
B106	2762	2732	2692	106
B107	2788	2758	2718	107
B108	2813	2783	2743	108
B110	2864	2834	2794	110
B111	2889	2859	2819	111
B112	2915	2885	2845	112
B112-1/2	2928	2898	2858	112.5
B114	2966	2936	2896	114
B115	2991	2961	2921	115
B116	3016	2986	2946	116
B118	3067	3037	2997	118
B120	3118	3088	3048	120
B122	3169	3139	3099	122
B124	3220	3190	3150	124
B125	3245	3215	3175	125
B126	3270	3240	3200	126
B127	3296	3266	3226	127
B128	3321	3291	3251	128
B130	3372	3342	3302	130
B131	3397	3367	3327	131
B132	3423	3393	3353	132
B133	3448	3418	3378	133
B134	3474	3444	3404	134
B135	3499	3469	3429	135
B136	3524	3494	3454	136
B138	3575	3545	3505	138
B140	3626	3596	3556	140
B144	3728	3698	3658	144
B146	3778	3748	3708	146
B147	3804	3774	3734	147
B148	3829	3799	3759	148
B150	3880	3850	3810	150
B151	3905	3875	3835	151
B152	3931	3901	3861	152
B154	3982	3952	3912	154
B155	4007	3977	3937	155
B156	4032	4002	3962	156
B157	4058	4028	3988	157
B158	4083	4053	4013	158
B161	4159	4129	4089	161
B162	4185	4155	4115	162
B163	4210	4180	4140	163
B164	4236	4206	4166	164
B165	4261	4231	4191	165
B167	4312	4282	4242	167
B168	4337	4307	4267	168

B - SECTION continued

Part No	Outside Length (mm)	Pitch Length (mm)	Inside Length (mm)	Inside Length (in)
B169	4363	4333	4293	169
B172	4439	4409	4369	172
B173	4464	4434	4394	173
B175	4515	4485	4445	175
B177	4566	4536	4496	177
B180	4642	4612	4572	180
B185	4769	4739	4699	185
B186	4794	4764	4724	186
B187	4820	4790	4750	187
B188	4845	4815	4775	188
B192	4947	4917	4877	192
B195	5023	4993	4953	195
B197	5074	5044	5004	197
B204	5252	5222	5182	204
B208	5353	5323	5283	208
B210	5404	5374	5334	210
B217	5582	5552	5512	217
B218	5607	5577	5537	218
B220	5658	5628	5588	220

Part No	Outside Length (mm)	Pitch Length (mm)	Inside Length (mm)	Inside Length (in)
B221	5683	5653	5613	221
B223	5734	5704	5664	223
B224	5760	5730	5690	224
B224	5760	5730	5690	224
B225	5785	5755	5715	225
B228	5861	5831	5791	228
B229	5887	5857	5817	229
B237	6090	6060	6020	237
B238	6115	6085	6045	238
B240	6166	6136	6096	240
B248	6369	6339	6299	248
B249	6395	6365	6325	249
B253	6496	6466	6426	253
B255	6547	6517	6477	255
B256	6572	6542	6502	256
B259	6649	6619	6579	259
B265	6801	6771	6731	265
B269	6903	6873	6833	269
B270	6928	6898	6858	270

Part No	Outside Length (mm)	Pitch Length (mm)	Inside Length (mm)	Inside Length (in)
B274	7030	7000	6960	274
B276	7080	7050	7010	276
B280	7182	7152	7112	280
B285	7309	7279	7239	285
B300	7690	7660	7620	300
B315	8071	8041	8001	315
B330	8452	8422	8382	330
B345	8833	8803	8763	345
B360	9214	9184	9144	360
B361	9239	9209	9169	361
B364	9316	9286	9246	364
B366	9366	9336	9296	366
B394	10078	10048	10008	394
B433	11068	11038	10998	433
B472	12059	12029	11989	472
B512	13075	13045	13005	512
B551	14065	14035	13995	551
B553	14116	14086	14046	553
B669	17063	17033	16993	669

C - SECTION

Part No	Outside Length (mm)	Pitch Length (mm)	Inside Length (mm)	Inside Length (in)
C33-3/4	945	915	857	33.75
C37-1/2	1041	1011	953	37.5
C38	1053	1023	965	38
C39-3/4	1098	1068	1010	39.75
C40	1104	1074	1016	40
C41	1129	1099	1041	41
C42	1155	1125	1067	42
C43	1180	1150	1092	43
C44	1206	1176	1118	44
C45	1231	1201	1143	45
C46	1256	1226	1168	46
C47	1282	1252	1194	47
C48	1307	1277	1219	48
C49	1333	1303	1245	49
C50	1358	1328	1270	50
C51	1383	1353	1295	51
C52	1409	1379	1321	52
C53	1434	1404	1346	53
C54	1460	1430	1372	54
C55	1485	1455	1397	55
C56	1510	1480	1422	56
C57	1536	1506	1448	57

Part No	Outside Length (mm)	Pitch Length (mm)	Inside Length (mm)	Inside Length (in)
C58	1561	1531	1473	58
C59	1587	1557	1499	59
C60	1612	1582	1524	60
C61	1637	1607	1549	61
C62	1663	1633	1575	62
C62-1/4	1669	1639	1581	62.25
C63	1688	1658	1600	63
C64	1714	1684	1626	64
C65	1739	1709	1651	65
C66	1764	1734	1676	66
C67	1790	1760	1702	67
C68	1815	1785	1727	68
C69	1841	1811	1753	69
C70	1866	1836	1778	70
C71	1891	1861	1803	71
C72	1917	1887	1829	72
C73	1942	1912	1854	73
C74	1968	1938	1880	74
C75	1993	1963	1905	75
C76	2018	1988	1930	76
C77	2044	2014	1956	77
C78	2069	2039	1981	78

Part No	Outside Length (mm)	Pitch Length (mm)	Inside Length (mm)	Inside Length (in)
C79	2095	2065	2007	79
C80	2120	2090	2032	80
C81	2145	2115	2057	81
C82	2171	2141	2083	82
C83	2196	2166	2108	83
C84	2222	2192	2134	84
C85	2247	2217	2159	85
C86	2272	2242	2184	86
C87	2298	2268	2210	87
C87-1/2	2311	2281	2223	87.5
C88	2323	2293	2235	88
C89	2349	2319	2261	89
C90	2374	2344	2286	90
C92	2425	2395	2337	92
C93	2450	2420	2362	93
C94	2476	2446	2388	94
C95	2501	2471	2413	95
C96	2526	2496	2438	96
C97	2552	2522	2464	97
C97-1/2	2565	2535	2477	97.5
C98	2577	2547	2489	98
C99	2603	2573	2515	99

C - SECTION continued

Part No	Outside Length (mm)	Pitch Length (mm)	Inside Length (mm)	Inside Length (in)
C100	2628	2598	2540	100
C101	2653	2623	2565	101
C102	2679	2649	2591	102
C104	2730	2700	2642	104
C105	2755	2725	2667	105
C106	2780	2750	2692	106
C108	2831	2801	2743	108
C110	2882	2852	2794	110
C111	2907	2877	2819	111
C112	2933	2903	2845	112
C112-1/2	2946	2916	2858	112.5
C114	2984	2954	2896	114
C115	3009	2979	2921	115
C116	3034	3004	2946	116
C117	3060	3030	2972	117
C118	3085	3055	2997	118
C119	3111	3081	3023	119
C120	3136	3106	3048	120
C124	3238	3208	3150	124
C126	3288	3258	3200	126
C128	3339	3309	3251	128
C130	3390	3360	3302	130
C132	3441	3411	3353	132
C134	3492	3462	3404	134
C135	3517	3487	3429	135
C136	3542	3512	3454	136
C138	3593	3563	3505	138
C140	3644	3614	3556	140
C142	3695	3665	3607	142
C144	3746	3716	3658	144

Part No	Outside Length (mm)	Pitch Length (mm)	Inside Length (mm)	Inside Length (in)
C146	3796	3766	3708	146
C147	3822	3792	3734	147
C148	3847	3817	3759	148
C150	3898	3868	3810	150
C152	3949	3919	3861	152
C153	3974	3944	3886	153
C154	4000	3970	3912	154
C156	4050	4020	3962	156
C158	4101	4071	4013	158
C160	4152	4122	4064	160
C161-1/2	4190	4160	4102	161.5
C162	4203	4173	4115	162
C165	4279	4249	4191	165
C166	4304	4274	4216	166
C167	4330	4300	4242	167
C168	4355	4325	4267	168
C173	4482	4452	4394	173
C175	4533	4503	4445	175
C177	4584	4554	4496	177
C179	4635	4605	4547	179
C180	4660	4630	4572	180
C185	4787	4757	4699	185
C186	4812	4782	4724	186
C187	4838	4808	4750	187
C190	4914	4884	4826	190
C195	5041	5011	4953	195
C197	5092	5062	5004	197
C200	5168	5138	5080	200
C204	5270	5240	5182	204
C208	5371	5341	5283	208

Part No	Outside Length (mm)	Pitch Length (mm)	Inside Length (mm)	Inside Length (in)
C210	5422	5392	5334	210
C216	5574	5544	5486	216
C220	5676	5646	5588	220
C222	5727	5697	5639	222
C225	5803	5773	5715	225
C228	5879	5849	5791	228
C236	6082	6052	5994	236
C238	6133	6103	6045	238
C240	6184	6154	6096	240
C248	6387	6357	6299	248
C250	6438	6408	6350	250
C255	6565	6535	6477	255
C265	6819	6789	6731	265
C270	6946	6916	6858	270
C276	7098	7068	7010	276
C280	7200	7170	7112	280
C285	7327	7297	7239	285
C297	7632	7602	7544	297
C300	7708	7678	7620	300
C303	7784	7754	7696	303
C314	8064	8034	7976	314
C316	8114	8084	8026	316
C330	8470	8440	8382	330
C336	8622	8592	8534	336
C345	8851	8821	8763	345
C360	9232	9202	9144	360
C394	10096	10066	10008	394
C420	10756	10726	10668	420
C424	10858	10828	10770	424

D - SECTION

Part No	Outside Length (mm)	Pitch Length (mm)	Inside Length (mm)	Inside Length (in)
D98	2616	2565	2489	98
D104	2769	2718	2642	104
D110	2921	2870	2794	110
D118	3124	3073	2997	118
D120	3175	3124	3048	120
D124	3277	3226	3150	124
D128	3378	3327	3251	128
D136	3581	3530	3454	136
D137	3607	3556	3480	137
D140	3683	3632	3556	140
D144	3785	3734	3658	144

Part No	Outside Length (mm)	Pitch Length (mm)	Inside Length (mm)	Inside Length (in)
D150	3937	3886	3810	150
D152	3988	3937	3861	152
D154	4039	3988	3912	154
D158	4140	4089	4013	158
D162	4242	4191	4115	162
D170	4445	4394	4318	170
D173	4521	4470	4394	173
D177	4623	4572	4496	177
D180	4699	4648	4572	180
D187	4877	4826	4750	187
D195	5080	5029	4953	195

Part No	Outside Length (mm)	Pitch Length (mm)	Inside Length (mm)	Inside Length (in)
D197	5131	5080	5004	197
D204	5309	5258	5182	204
D205	5334	5283	5207	205
D207	5385	5334	5258	207
D210	5461	5410	5334	210
D223	5791	5740	5664	223
D225	5842	5791	5715	225
D236	6121	6070	5994	236
D238	6172	6121	6045	238
D240	6223	6172	6096	240
D248	6426	6375	6299	248

Longer belt lengths are available



V-BELTS RAW EDGE COGGED

Description

Energy saving, higher performance thanks to their flexibility. Dunlop raw edged cogged belts with a higher performance level, have a longer service life. Special designs with raw edges that allow higher slipping resistance even when they are working with low installation tensions.

Maximum resistance to the action of heat and oils. High antistatic properties conforming to ISO1813.

Part numbers are identified by 2 letters (e.g. AX) the belts cross section and a 2 or 3 digit number (e.g. 50) which represents the belts length in inches. AX50 etc.



AX - SECTION

Part No	Outside Length (mm)	Pitch Length (mm)	Inside Length (mm)	Inside Length (in)
AX19	533	513	483	19
AX22	609	589	559	22
AX23	634	614	584	23
AX24	660	640	610	24
AX25	685	665	635	25
AX26	710	690	660	26
AX27	736	716	686	27
AX28	761	741	711	28
AX29	787	767	737	29
AX30	812	792	762	30
AX31	837	817	787	31
AX32	863	843	813	32
AX33	888	868	838	33
AX34	914	894	864	34
AX35	939	919	889	35
AX36	964	944	914	36
AX37	990	970	940	37
AX38	1015	995	965	38
AX39	1041	1021	991	39
AX40	1066	1046	1016	40
AX41	1091	1071	1041	41
AX42	1117	1097	1067	42
AX43	1142	1122	1092	43
AX44	1168	1148	1118	44
AX45	1193	1173	1143	45
AX46	1218	1198	1168	46
AX47	1244	1224	1194	47
AX48	1269	1249	1219	48
AX49	1295	1275	1245	49
AX50	1320	1300	1270	50

Part No	Outside Length (mm)	Pitch Length (mm)	Inside Length (mm)	Inside Length (in)
AX51	1345	1325	1295	51
AX52	1371	1351	1321	52
AX53	1396	1376	1346	53
AX54	1422	1402	1372	54
AX55	1447	1427	1397	55
AX56	1472	1452	1422	56
AX57	1498	1478	1448	57
AX58	1523	1503	1473	58
AX59	1549	1529	1499	59
AX60	1574	1554	1524	60
AX61	1599	1579	1549	61
AX62	1625	1605	1575	62
AX63	1650	1630	1600	63
AX64	1676	1656	1626	64
AX65	1701	1681	1651	65
AX66	1726	1706	1676	66
AX67	1752	1732	1702	67
AX68	1777	1757	1727	68
AX69	1803	1783	1753	69
AX70	1828	1808	1778	70
AX71	1853	1833	1803	71
AX72	1879	1859	1829	72
AX73	1904	1884	1854	73
AX74	1930	1910	1880	74
AX75	1955	1935	1905	75
AX76	1980	1960	1930	76
AX77	2006	1986	1956	77
AX78	2031	2011	1981	78
AX79	2057	2037	2007	79
AX80	2082	2062	2032	80

Part No	Outside Length (mm)	Pitch Length (mm)	Inside Length (mm)	Inside Length (in)
AX81	2107	2087	2057	81
AX82	2133	2113	2083	82
AX83	2158	2138	2108	83
AX84	2184	2164	2134	84
AX85	2209	2189	2159	85
AX86	2234	2214	2184	86
AX87	2260	2240	2210	87
AX88	2285	2265	2235	88
AX89	2311	2291	2261	89
AX90	2336	2316	2286	90
AX91	2361	2341	2311	91
AX92	2387	2367	2337	92
AX93	2412	2392	2362	93
AX94	2438	2418	2388	94
AX95	2463	2443	2413	95
AX96	2488	2468	2438	96
AX97	2514	2494	2464	97
AX98	2539	2519	2489	98
AX103	2666	2646	2616	103
AX105	2717	2697	2667	105
AX110	2844	2824	2794	110
AX112	2895	2875	2845	112
AX120	3098	3078	3048	120
AX128	3301	3281	3251	128
AX136	3504	3484	3454	136
AX144	3708	3688	3658	144
AX158	4063	4043	4013	158
AX173	4444	4424	4394	173
AX180	4622	4602	4572	180

BX - SECTION

Part No	Outside Length (mm)	Pitch Length (mm)	Inside Length (mm)	Inside Length (in)
BX24	680	650	610	24
BX26	730	700	660	26
BX28	781	751	711	28
BX30	832	802	762	30
BX31	857	827	787	31
BX32	883	853	813	32
BX33	908	878	838	33
BX34	934	904	864	34
BX35	959	929	889	35
BX36	984	954	914	36
BX37	1010	980	940	37
BX38	1035	1005	965	38
BX39	1061	1031	991	39
BX40	1086	1056	1016	40
BX41	1111	1081	1041	41
BX42	1137	1107	1067	42
BX43	1162	1132	1092	43
BX44	1188	1158	1118	44
BX45	1213	1183	1143	45
BX46	1238	1208	1168	46
BX47	1264	1234	1194	47
BX48	1289	1259	1219	48
BX49	1315	1285	1245	49
BX50	1340	1310	1270	50
BX51	1365	1335	1295	51
BX52	1391	1361	1321	52
BX53	1416	1386	1346	53
BX54	1442	1412	1372	54
BX55	1467	1437	1397	55
BX56	1492	1462	1422	56
BX57	1518	1488	1448	57
BX58	1543	1513	1473	58
BX59	1569	1539	1499	59
BX60	1594	1564	1524	60

Part No	Outside Length (mm)	Pitch Length (mm)	Inside Length (mm)	Inside Length (in)
BX61	1619	1589	1549	61
BX62	1645	1615	1575	62
BX63	1670	1640	1600	63
BX64	1696	1666	1626	64
BX65	1721	1691	1651	65
BX66	1746	1716	1676	66
BX67	1772	1742	1702	67
BX68	1797	1767	1727	68
BX69	1823	1793	1753	69
BX70	1848	1818	1778	70
BX71	1873	1843	1803	71
BX72	1899	1869	1829	72
BX73	1924	1894	1854	73
BX74	1950	1920	1880	74
BX75	1975	1945	1905	75
BX76	2000	1970	1930	76
BX77	2026	1996	1956	77
BX78	2051	2021	1981	78
BX79	2077	2047	2007	79
BX80	2102	2072	2032	80
BX81	2127	2097	2057	81
BX82	2153	2123	2083	82
BX83	2178	2148	2108	83
BX84	2204	2174	2134	84
BX85	2229	2199	2159	85
BX86	2254	2224	2184	86
BX87	2280	2250	2210	87
BX88	2305	2275	2235	88
BX89	2331	2301	2261	89
BX90	2356	2326	2286	90
BX91	2381	2351	2311	91
BX92	2407	2377	2337	92
BX93	2432	2402	2362	93
BX94	2458	2428	2388	94

Part No	Outside Length (mm)	Pitch Length (mm)	Inside Length (mm)	Inside Length (in)
BX95	2483	2453	2413	95
BX96	2508	2478	2438	96
BX97	2534	2504	2464	97
BX98	2559	2529	2489	98
BX99	2585	2555	2515	99
BX100	2610	2580	2540	100
BX103	2686	2656	2616	103
BX105	2737	2707	2667	105
BX106	2762	2732	2692	106
BX108	2813	2783	2743	108
BX112	2915	2885	2845	112
BX113	2940	2910	2870	113
BX115	2991	2961	2921	115
BX116	3016	2986	2946	116
BX120	3118	3088	3048	120
BX123	3194	3164	3124	123
BX124	3220	3190	3150	124
BX126	3270	3240	3200	126
BX128	3321	3291	3251	128
BX133	3448	3418	3378	133
BX136	3524	3494	3454	136
BX140	3626	3596	3556	140
BX144	3728	3698	3658	144
BX148	3829	3799	3759	148
BX150	3880	3850	3810	150
BX154	3982	3952	3912	154
BX158	4083	4053	4013	158
BX162	4185	4155	4115	162
BX173	4464	4434	4394	173
BX180	4642	4612	4572	180
BX191	4921	4891	4851	191
BX195	5023	4993	4953	195

CX - SECTION

Part No	Outside Length (mm)	Pitch Length (mm)	Inside Length (mm)	Inside Length (in)
CX51	1383	1353	1295	51
CX55	1485	1455	1397	55
CX60	1612	1582	1524	60
CX68	1815	1785	1727	68
CX72	1917	1887	1829	72
CX75	1993	1963	1905	75
CX78	2069	2039	1981	78

Part No	Outside Length (mm)	Pitch Length (mm)	Inside Length (mm)	Inside Length (in)
CX81	2145	2115	2057	81
CX85	2247	2217	2159	85
CX90	2374	2344	2286	90
CX96	2526	2496	2438	96
CX100	2628	2598	2540	100
CX101	2653	2623	2565	101
CX105	2755	2725	2667	105

Part No	Outside Length (mm)	Pitch Length (mm)	Inside Length (mm)	Inside Length (in)
CX109	2857	2827	2769	109
CX111	2907	2877	2819	111
CX112	2933	2903	2845	112
CX115	3009	2979	2921	115
CX120	3136	3106	3048	120
CX128	3339	3309	3251	128
CX136	3542	3512	3454	136



V-BELTS AUTOMOTIVE

Description

Energy saving, higher performance thanks to their flexibility. Dunlop Automotive V-belts with a higher performance level have a longer service life. Special designs with Raw edges that allow higher slipping resistance even when they are working with low installation tensions.

Maximum resistance to the action of heat and oils. High antistatic properties used in automotive applications and conforming to ISO1813.

Part numbers are identified by 3 letters (e.g.AVX) the belts cross section and a 2 digit number (e.g.10)the belts top width and a 3 or 4 digit number which represents the belts length in mm. AVX10x800 etc.



AVX10 - SECTION

Part No	Outside Length (mm)	Pitch Length (mm)	Inside Length (mm)	Inside Length (in)
AVX10X600	600	587	549	21.6
AVX10X613	613	600	562	22.1
AVX10X617	617	604	566	22.3
AVX10X625	625	612	574	22.6
AVX10X635	635	622	584	23.0
AVX10X643	643	630	592	23.3
AVX10X650	650	637	599	23.6
AVX10X670	670	657	619	24.4
AVX10X675	675	662	624	24.6
AVX10X683	683	670	632	24.9
AVX10X685	685	672	634	25.0
AVX10X695	695	682	644	25.4
AVX10X700	700	687	649	25.6
AVX10X710	710	697	659	25.9
AVX10X725	725	712	674	26.5
AVX10X735	735	722	684	26.9
AVX10X740	740	727	689	27.1
AVX10X745	745	732	694	27.3
AVX10X750	750	737	699	27.5
AVX10X763	763	750	712	28.0
AVX10X775	775	762	724	28.5
AVX10X785	785	772	734	28.9
AVX10X800	800	787	749	29.5
AVX10X813	813	800	762	30.0
AVX10X818	818	805	767	30.2
AVX10X825	825	812	774	30.5
AVX10X838	838	825	787	31.0
AVX10X844	844	831	793	31.2
AVX10X850	850	837	799	31.5

Part No	Outside Length (mm)	Pitch Length (mm)	Inside Length (mm)	Inside Length (in)
AVX10X864	864	851	813	32.0
AVX10X875	875	862	824	32.4
AVX10X888	888	875	837	33.0
AVX10X900	900	887	849	33.4
AVX10X913	913	900	862	33.9
AVX10X920	920	907	869	34.2
AVX10X925	925	912	874	34.4
AVX10X930	930	917	879	34.6
AVX10X935	935	922	884	34.8
AVX10X940	940	927	889	35.0
AVX10X950	950	937	899	35.4
AVX10X960	960	947	909	35.8
AVX10X965	965	952	914	36.0
AVX10X970	970	957	919	36.2
AVX10X975	975	962	924	36.4
AVX10X980	980	967	929	36.6
AVX10X990	990	977	939	37.0
AVX10X995	995	982	944	37.2
AVX10X1000	1000	987	949	37.4
AVX10X1005	1005	992	954	37.6
AVX10X1013	1013	1000	962	37.9
AVX10X1025	1025	1012	974	38.3
AVX10X1050	1050	1037	999	39.3
AVX10X1060	1060	1047	1009	39.7
AVX10X1070	1070	1057	1019	40.1
AVX10X1075	1075	1062	1024	40.3
AVX10X1080	1080	1067	1029	40.5
AVX10X1090	1090	1077	1039	40.9
AVX10X1100	1100	1087	1049	41.3

AVX10 - SECTION continued

Part No	Outside Length (mm)	Pitch Length (mm)	Inside Length (mm)	Inside Length (in)
AVX10X1110	1110	1097	1059	41.7
AVX10X1125	1125	1112	1074	42.3
AVX10X1140	1140	1127	1089	42.9
AVX10X1150	1150	1137	1099	43.3
AVX10X1165	1165	1152	1114	43.9
AVX10X1175	1175	1162	1124	44.3
AVX10X1184	1184	1171	1133	44.6
AVX10X1200	1200	1187	1149	45.2
AVX10X1215	1215	1202	1164	45.8
AVX10X1220	1220	1207	1169	46.0
AVX10X1225	1225	1212	1174	46.2
AVX10X1230	1230	1217	1179	46.4
AVX10X1235	1235	1222	1184	46.6
AVX10X1250	1250	1237	1199	47.2
AVX10X1260	1260	1247	1209	47.6
AVX10X1275	1275	1262	1224	48.2

Part No	Outside Length (mm)	Pitch Length (mm)	Inside Length (mm)	Inside Length (in)
AVX10X1300	1300	1287	1249	49.2
AVX10X1325	1325	1312	1274	50.2
AVX10X1340	1340	1327	1289	50.7
AVX10X1350	1350	1337	1299	51.1
AVX10X1375	1375	1362	1324	52.1
AVX10X1400	1400	1387	1349	53.1
AVX10X1425	1425	1412	1374	54.1
AVX10X1450	1450	1437	1399	55.1
AVX10X1475	1475	1462	1424	56.1
AVX10X1500	1500	1487	1449	57.0
AVX10X1525	1525	1512	1474	58.0
AVX10X1550	1550	1537	1499	59.0
AVX10X1575	1575	1562	1524	60.0
AVX10X1600	1600	1587	1549	61.0
AVX10X1625	1625	1612	1574	62.0
AVX10X1675	1675	1662	1624	63.9

AVX13 - SECTION

Part No	Outside Length (mm)	Pitch Length (mm)	Inside Length (mm)	Inside Length (in)
AVX13X750	750	732	687	27.0
AVX13X775	775	757	712	28.0
AVX13X800	800	782	737	29.0
AVX13X810	810	792	747	29.4
AVX13X818	818	800	755	29.7
AVX13X825	825	807	762	30.0
AVX13X835	835	817	772	30.4
AVX13X850	850	832	787	31.0
AVX13X875	875	857	812	32.0
AVX13X900	900	882	837	33.0
AVX13X918	918	900	855	33.7
AVX13X925	925	907	862	33.9
AVX13X950	950	932	887	34.9
AVX13X960	960	942	897	35.3
AVX13X975	975	957	912	35.9
AVX13X985	985	967	922	36.3
AVX13X992	992	974	929	36.6
AVX13X1000	1000	982	937	36.9
AVX13X1015	1015	997	952	37.5
AVX13X1025	1025	1007	962	37.9
AVX13X1030	1030	1012	967	38.1
AVX13X1040	1040	1022	977	38.5
AVX13X1050	1050	1032	987	38.9
AVX13X1055	1055	1037	992	39.1
AVX13X1060	1060	1042	997	39.3

Part No	Outside Length (mm)	Pitch Length (mm)	Inside Length (mm)	Inside Length (in)
AVX13X1075	1075	1057	1012	39.8
AVX13X1100	1100	1082	1037	40.8
AVX13X1125	1125	1107	1062	41.8
AVX13X1145	1145	1127	1082	42.6
AVX13X1150	1150	1132	1087	42.8
AVX13X1175	1175	1157	1112	43.8
AVX13X1200	1200	1182	1137	44.8
AVX13X1225	1225	1207	1162	45.7
AVX13X1250	1250	1232	1187	46.7
AVX13X1275	1275	1257	1212	47.7
AVX13X1285	1285	1267	1222	48.1
AVX13X1300	1300	1282	1237	48.7
AVX13X1325	1325	1307	1262	49.7
AVX13X1350	1350	1332	1287	50.7
AVX13X1375	1375	1357	1312	51.7
AVX13X1400	1400	1382	1337	52.6
AVX13X1425	1425	1407	1362	53.6
AVX13X1450	1450	1432	1387	54.6
AVX13X1475	1475	1457	1412	55.6
AVX13X1500	1500	1482	1437	56.6
AVX13X1525	1525	1507	1462	57.6
AVX13X1550	1550	1532	1487	58.5
AVX13X1575	1575	1557	1512	59.5
AVX13X1600	1600	1582	1537	60.5
AVX13X1625	1625	1607	1562	61.5



V & WEDGE BELTS



V-BELTS AGRICULTURAL

Description

3L, 4L & 5L cross section v-belts provide energy saving and high performance, a premium v-belt ideally suited for clutching application. Length stable kevlar corded (cotton covered) provides fewer take-ups and length adjustments. Longer life coupled with high heat and oil resistance.

AA, BB & CC cross section hexagonal v-belts are flexible in the direction of motion, rigid in transverse direction and designed for use in serpentine agricultural applications involving multiple pulley arrangements.

Dunlop hexagonal belts are identified by 2 letters stating their cross-section (e.g. AA) and by a number (e.g. 105) which represents the nominal pitch length in inches. AA105 etc.



3L - SECTION

Part No	Outside Length (mm)	Outside Length (in)
3L200K	508	20
3L210K	533	21
3L220K	559	22
3L240K	610	24
3L250K	635	25
3L260K	660	26
3L270K	686	27
3L280K	711	28
3L290K	737	29
3L300K	762	30

Part No	Outside Length (mm)	Outside Length (in)
3L310K	787	31
3L320K	813	32
3L330K	838	33
3L340K	864	34
3L350K	889	35
3L360K	914	36
3L370K	940	37
3L380K	965	38
3L390K	991	39
3L400K	1016	40

Part No	Outside Length (mm)	Outside Length (in)
3L410K	1041	41
3L420K	1067	42
3L430K	1092	43
3L440K	1118	44
3L450K	1143	45
3L460K	1168	46
3L470K	1194	47
3L480K	1219	48

4L - SECTION

Part No	Outside Length (mm)	Outside Length (in)
4L200K	508	20
4L210K	533	21
4L220K	559	22
4L230K	584	23
4L240K	610	24
4L250K	635	25
4L260K	660	26
4L270K	686	27
4L280K	711	28
4L290K	737	29
4L300K	762	30
4L310K	787	31
4L320K	813	32
4L330K	838	33

Part No	Outside Length (mm)	Outside Length (in)
4L340K	864	34
4L350K	889	35
4L360K	914	36
4L370K	940	37
4L380K	965	38
4L390K	991	39
4L400K	1016	40
4L410K	1041	41
4L420K	1067	42
4L430K	1092	43
4L440K	1118	44
4L450K	1143	45
4L460K	1168	46
4L470K	1194	47

Part No	Outside Length (mm)	Outside Length (in)
4L480K	1219	48
4L490K	1245	49
4L500K	1270	50
4L510K	1295	51
4L520K	1321	52
4L530K	1346	53
4L540K	1372	54
4L550K	1397	55
4L560K	1422	56
4L570K	1448	57
4L580K	1473	58
4L590K	1499	59
4L600K	1524	60
4L610K	1549	61

Longer belt lengths are available

4L - SECTION continued

Part No	Outside Length (mm)	Outside Length (in)
4L620K	1575	62
4L630K	1600	63
4L640K	1626	64
4L650K	1651	65
4L660K	1676	66
4L670K	1702	67
4L680K	1727	68
4L690K	1753	69
4L700K	1778	70
4L710K	1803	71
4L720K	1829	72
4L730K	1854	73
4L740K	1880	74
4L750K	1905	75
4L760K	1930	76
4L770K	1956	77
4L780K	1981	78

Part No	Outside Length (mm)	Outside Length (in)
4L790K	2007	79
4L800K	2032	80
4L810K	2057	81
4L820K	2083	82
4L830K	2108	83
4L840K	2134	84
4L850K	2159	85
4L860K	2184	86
4L870K	2210	87
4L880K	2235	88
4L890K	2261	89
4L900K	2286	90
4L910K	2311	91
4L920K	2337	92
4L930K	2362	93
4L940K	2388	94
4L950K	2413	95

Part No	Outside Length (mm)	Outside Length (in)
4L960K	2438	96
4L970K	2464	97
4L980K	2489	98
4L990K	2515	99
4L1000K	2540	100
4L1020K	2591	102
4L1030K	2616	103
4L1050K	2667	105
4L1060K	2692	106
4L1070K	2718	107
4L1080K	2743	108
4L1120K	2845	112
4L1140K	2896	114
4L1170K	2972	117
4L1180K	2997	118
4L1380K	3505	138

5L - SECTION


Part No	Outside Length (mm)	Outside Length (in)
5L250K	635	25
5L260K	660	26
5L270K	686	27
5L280K	711	28
5L290K	737	29
5L300K	762	30
5L310K	787	31
5L320K	813	32
5L330K	838	33
5L340K	864	34
5L350K	889	35
5L360K	914	36
5L370K	940	37
5L380K	965	38
5L390K	991	39
5L400K	1016	40
5L410K	1041	41
5L420K	1067	42
5L430K	1092	43
5L440K	1118	44
5L450K	1143	45
5L460K	1168	46
5L470K	1194	47
5L480K	1219	48

Part No	Outside Length (mm)	Outside Length (in)
5L490K	1245	49
5L500K	1270	50
5L510K	1295	51
5L520K	1321	52
5L530K	1346	53
5L540K	1372	54
5L550K	1397	55
5L560K	1422	56
5L570K	1448	57
5L580K	1473	58
5L590K	1499	59
5L600K	1524	60
5L610K	1549	61
5L620K	1575	62
5L630K	1600	63
5L640K	1626	64
5L650K	1651	65
5L660K	1676	66
5L670K	1702	67
5L680K	1727	68
5L690K	1753	69
5L700K	1778	70
5L710K	1803	71
5L720K	1829	72

Part No	Outside Length (mm)	Outside Length (in)
5L730K	1854	73
5L740K	1880	74
5L750K	1905	75
5L760K	1930	76
5L770K	1956	77
5L780K	1981	78
5L790K	2007	79
5L800K	2032	80
5L810K	2057	81
5L820K	2083	82
5L830K	2108	83
5L840K	2134	84
5L850K	2159	85
5L860K	2184	86
5L870K	2210	87
5L880K	2235	88
5L890K	2261	89
5L900K	2286	90
5L910K	2311	91
5L920K	2337	92
5L930K	2362	93
5L940K	2388	94
5L950K	2413	95
5L960K	2438	96

Please enquire for longer length options

AA - BB - CC - SECTION

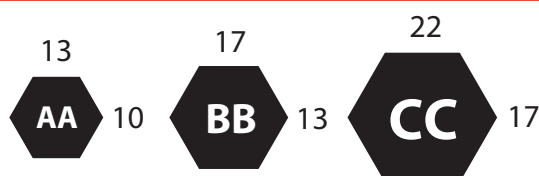

AA - SECTION

Part No	Outside Length (mm)	Inside Length (mm)
AA51	1382	1295
AA60	1611	1524
AA61	1636	1549
AA68	1814	1727
AA69	1840	1753
AA71	1890	1803
AA73	1941	1854
AA75	1992	1905
AA77	2043	1956

Part No	Outside Length (mm)	Inside Length (mm)
AA80	2119	2032
AA81	2144	2057
AA85	2246	2159
AA86	2271	2184
AA90	2373	2286
AA91	2398	2311
AA95	2500	2413
AA96	2525	2438
AA102	2678	2591

Part No	Outside Length (mm)	Inside Length (mm)
AA105	2754	2667
AA108	2830	2743
AA112	2932	2845
AA116	3033	2946
AA120	3135	3048
AA128	3338	3251
AA152	3948	3861

BB - SECTION

Part No	Outside Length (mm)	Inside Length (mm)
BB50	1387	1270
BB60	1641	1524
BB75	2022	1905
BB76	2047	1930
BB81	2174	2057
BB83	2225	2108
BB84	2251	2134
BB85	2276	2159
BB90	2403	2286
BB97	2581	2464
BB105	2784	2667
BB112	2962	2845

Part No	Outside Length (mm)	Inside Length (mm)
BB118	3114	2997
BB120	3165	3048
BB121	3190	3073
BB126	3317	3200
BB128	3368	3251
BB130	3419	3302
BB131	3444	3327
BB144	3775	3658
BB154	4029	3912
BB155	4054	3937
BB158	4130	4013
BB173	4511	4394

Part No	Outside Length (mm)	Inside Length (mm)
BB174	4537	4420
BB180	4689	4572
BB184	4791	4674
BB195	5070	4953
BB210	5451	5334
BB240	6213	6096
BB270	6975	6858
BB300	7737	7620

CC - SECTION

Part No	Outside Length (mm)	Pitch Length (mm)
CC75	2067	1905
CC81	2219	2057
CC85	2321	2159
CC86	2346	2184
CC90	2448	2286
CC96	2600	2438
CC105	2829	2667
CC112	3007	2845
CC120	3210	3048
CC122	3261	3099

Part No	Outside Length (mm)	Pitch Length (mm)
CC128	3413	3251
CC144	3820	3658
CC153	4048	3886
CC158	4175	4013
CC162	4277	4115
CC173	4556	4394
CC180	4734	4572
CC193	5064	4902
CC195	5115	4953
CC210	5496	5334

Part No	Outside Length (mm)	Pitch Length (mm)
CC234	6106	5944
CC240	6258	6096
CC270	7020	6858
CC300	7782	7620
CC313	8112	7950
CC330	8544	8382
CC360	9306	9144
CC390	10068	9906
CC420	10830	10668




V-BELTS VARIABLE SPEED

Description

Our range of Variable Speed V-Belts includes belts conforming to ISO R 1604, they are designated by e.g. the letter W followed by a number e.g. 16 which is the belts width in mm. This is followed by a number e.g. 500 which corresponds to the pitch length Lp in mm.

Belts not covered by the ISO standards are designated by a code consisting of a set of 3 numbers e.g. 22 which denotes the belts top width followed by e.g. 8 which denotes the belts thickness and e.g. 1000 which denotes the belts inside length Li in mm, therefore e.g. 22x8x1000.

ISO 1604 SECTIONS	W 16	W 20	W 25	W 31.5	W 40	W 50	W 63	W 80
Nom. section W x T (mm)	17 x 16	21 x 7	26 x 8	33 x 10	42 x 13	52 x 16	65 x 20	83 x 26
Pitch width Wp (mm)	16	20	25	31.5	40	50	63	80



ISO 1604 - SECTIONS


Part No	Cross Section (mm)	Pitch Length (mm)
16W450	17x5	450
16W500	17x5	500
16W560	17x5	560
16W630	17x5	630
16W800	17x5	800
20W1000	21x6.5	1000
20W1120	21x6.5	1120
20W1250	21x6.5	1250
20W560	21x6.5	560
20W630	21x6.5	630
20W710	21x6.5	710
20W800	21x6.5	800
20W900	21x6.5	900
25W710	26x8	710
25W800	26x8	800
25W900	26x8	900
25W1000	26x8	1000
25W1120	26x8	1120
25W1250	26x8	1250
25W1400	26x8	1400
25W1600	26x8	1600
31.5W900	33x10	900
31.5W1000	33x10	1000

Part No	Cross Section (mm)	Pitch Length (mm)
31.5W1120	33x10	1120
31.5W1250	33x10	1250
31.5W1400	33x10	1400
31.5W1600	33x10	1600
31.5W1800	33x10	1800
40W1000	42x13	1000
40W1120	42x13	1120
40W1250	42x13	1250
40W1400	42x13	1400
40W1500	42x13	1500
40W1600	42x13	1600
40W1700	42x13	1700
40W1800	42x13	1800
40W2000	42x13	2000
40W2240	42x13	2240
40W2500	42x13	2500
50W1120	52x16	1120
50W1150	52x16	1150
50W1250	52x16	1250
50W1400	52x16	1400
50W1600	52x16	1600
50W1700	52x16	1700
50W1800	52x16	1800

Part No	Cross Section (mm)	Pitch Length (mm)
50W2000	52x16	2000
50W2240	52x16	2240
50W2500	52x16	2500
50W2800	52x16	2800
50W3150	52x16	3150
63W1600	65x20	1600
63W1800	65x20	1800
63W2000	65x20	2000
63W2240	65x20	2240
63W2500	65x20	2500
63W2800	65x20	2800
63W3150	65x20	3150
63W3550	65x20	3550
63W4000	65x20	4000
80W1800	65x20	1800
80W2240	65x20	2240
80W2500	65x20	2500
80W2800	65x20	2800
80W3150	65x20	3150
80W3550	65x20	3550
80W4000	65x20	4000

VNN - SECTION

VNN SECTIONS	13 x 6	22 x 8	28 x 8	37 x 10	47 x 13	55 x 16
Angle α°	26	26	26	28	28	28

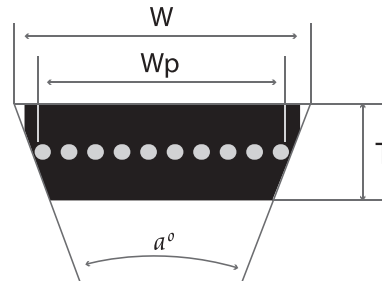

VNN - SECTION

Part No	Cross Section (mm)	Internal Length (mm)	Pitch Length (mm)	Part No	Cross Section (mm)	Internal Length (mm)	Pitch Length (mm)	Part No	Cross Section (mm)	Internal Length (mm)	Pitch Length (mm)
VS13X6X600	13x6	600	630	VS28X8X900	28x8	900	940	VS47X13X900	47x13	900	960
VS13X6X650	13x6	650	680	VS28X8X950	28x8	950	990	VS47X13X1000	47x13	1000	1060
VS13X6X700	13x6	700	730	VS28X8X1000	28x8	1000	1040	VS47X13X1060	47x13	1060	1120
VS13X6X750	13x6	750	780	VS28X8X1060	28x8	1060	1100	VS47X13X1120	47x13	1120	1180
VS13X6X800	13x6	800	830	VS28X8X1120	28x8	1120	1160	VS47X13X1180	47x13	1180	1240
VS13X6X850	13x6	850	880	VS28X8X1180	28x8	1180	1220	VS47X13X1250	47x13	1250	1310
VS13X6X900	13x6	900	930	VS28X8X1250	28x8	1250	1290	VS47X13X1320	47x13	1320	1380
VS22X8X550	22x8	550	590	VS28X8X1320	28x8	1320	1360	VS47X13X1400	47x13	1400	1460
VS22X8X600	22x8	600	640	VS28X8X1400	28x8	1400	1440	VS47X13X1500	47x13	1500	1560
VS22X8X650	22x8	650	690	VS28X8X1500	28x8	1500	1540	VS47X13X1600	47x13	1600	1660
VS22X8X700	22x8	700	740	VS37X10X750	37x10	750	800	VS47X13X1700	47x13	1700	1760
VS22X8X750	22x8	750	790	VS37X10X800	37x10	800	850	VS47X13X1800	47x13	1800	1860
VS22X8X800	22x8	800	840	VS37X10X850	37x10	850	900	VS47X13X2000	47x13	2000	2060
VS22X8X850	22x8	850	890	VS37X10X900	37x10	900	950	VS47X13X2240	47x13	2240	2300
VS22X8X900	22x8	900	940	VS37X10X950	37x10	950	1000	VS55X16X1180	55x16	1180	1255
VS22X8X950	22x8	950	990	VS37X10X1000	37x10	1000	1050	VS55X16X1250	55x16	1250	1325
VS22X8X1000	22x8	1000	1040	VS37X10X1060	37x10	1060	1110	VS55X16X1320	55x16	1320	1395
VS22X8X1060	22x8	1060	1100	VS37X10X1120	37x10	1120	1170	VS55X16X1400	55x16	1400	1475
VS22X8X1120	22x8	1120	1160	VS37X10X1180	37x10	1180	1230	VS55X16X1500	55x16	1500	1575
VS28X8X600	28x8	600	640	VS37X10X1250	37x10	1250	1300	VS55X16X1600	55x16	1600	1675
VS28X8X650	28x8	650	690	VS37X10X1320	37x10	1320	1370	VS55X16X1700	55x16	1700	1775
VS28X8X700	28x8	700	740	VS37X10X1400	37x10	1400	1450	VS55X16X1800	55x16	1800	1875
VS28X8X750	28x8	750	790	VS37X10X1500	37x10	1500	1550	VS55X16X2000	55x16	2000	2075
VS28X8X800	28x8	800	840	VS37X10X1600	37x10	1600	1650	VS55X16X2240	55x16	2240	2315
VS28X8X850	28x8	850	890	VS37X10X1700	37x10	1700	1750				




V & WEDGE BELTS BANDED

Description

Banded V-Belts & Wedge Belts are sets of belts assembled together. Besides incorporating all of the features of standard belts, the belts are joined together to form a band gives the following additional features; no flapping during abrupt load variations, no possibility of turning over and are ideal in high vibration applications.

Part numbers are designated by letters standing for their cross-section, e.g. SPB followed by a number e.g. 2000 which specifies the belts pitch length, followed by e.g. /4 which specifies the number of bands.

Wedge Belts Banded	3V	5V	8V
Individual Section W&T (mm)	9.65 x 7.8	15.8 x 13.5	25.0 x 23.0
Centres of grooves P (mm)	10.30	17.50	28.60
Lo - Lp (mm)	3.6	11.3	15.2

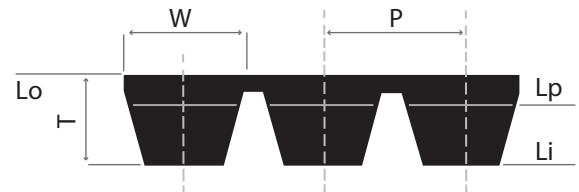

3V - SECTION BANDED

Part No	Effective Length (mm)	Effective Length (inches)
3V335/BAND	851	33.5
3V355/BAND	902	35.5
3V375/BAND	953	37.5
3V400/BAND	1016	40
3V425/BAND	1080	42.5
3V450/BAND	1143	45
3V475/BAND	1207	47.5
3V500/BAND	1270	50
3V530/BAND	1346	53

Part No	Effective Length (mm)	Effective Length (inches)
3V560/BAND	1422	56
3V600/BAND	1524	60
3V630/BAND	1600	63
3V670/BAND	1702	67
3V710/BAND	1803	71
3V750/BAND	1905	75
3V800/BAND	2032	80
3V850/BAND	2159	85
3V900/BAND	2286	90

Part No	Effective Length (mm)	Effective Length (inches)
3V950/BAND	2413	95
3V1000/BAND	2540	100
3V1060/BAND	2692	106
3V1120/BAND	2845	112
3V1180/BAND	2997	118
3V1250/BAND	3175	125
3V1320/BAND	3353	132
3V1400/BAND	3556	140

5V - SECTION BANDED

Part No	Effective Length (mm)	Effective Length (inches)
5V500/BAND	1270	50
5V530/BAND	1346	53
5V630/BAND	1600	63
5V670/BAND	1702	67
5V750/BAND	1905	75
5V800/BAND	2032	80
5V850/BAND	2159	85
5V900/BAND	2286	90
5V950/BAND	2413	95
5V1000/BAND	2540	100
5V1060/BAND	2692	106

Part No	Effective Length (mm)	Effective Length (inches)
5V1120/BAND	2845	112
5V1180/BAND	2997	118
5V1250/BAND	3175	125
5V1320/BAND	3353	132
5V1400/BAND	3556	140
5V1500/BAND	3810	150
5V1600/BAND	4064	160
5V1650/BAND	4191	165
5V1700/BAND	4318	170
5V1800/BAND	4572	180
5V1900/BAND	4826	190

Part No	Effective Length (mm)	Effective Length (inches)
5V2000/BAND	5080	200
5V2120/BAND	5385	212
5V2240/BAND	5690	224
5V2360/BAND	5994	236
5V2500/BAND	6350	250
5V2650/BAND	6731	265
5V2800/BAND	7112	280
5V3000/BAND	7620	300
5V3150/BAND	8001	315
5V3350/BAND	8509	335
5V3550/BAND	9017	355


8V - SECTION BANDED

Part No	Effective Length (mm)	Effective Length (inches)
8V1000/BAND	2540	100
8V1400/BAND	3556	140
8V1600/BAND	4064	160
8V1700/BAND	4318	170
8V1800/BAND	4572	180
8V1900/BAND	4826	190
8V2000/BAND	5080	200
8V2120/BAND	5385	212
8V2240/BAND	5690	224

Part No	Effective Length (mm)	Effective Length (inches)
8V2360/BAND	5994	236
8V2500/BAND	6350	250
8V2650/BAND	6731	265
8V2800/BAND	7112	280
8V3000/BAND	7620	300
8V3150/BAND	8001	315
8V3350/BAND	8509	335
8V3550/BAND	9017	355
8V3750/BAND	9525	375

Part No	Effective Length (mm)	Effective Length (inches)
8V4000/BAND	10160	400
8V4250/BAND	10795	425
8V4500/BAND	11430	450
8V4750/BAND	12065	475
8V5000/BAND	12700	500
8V5600/BAND	14224	560
8V6000/BAND	15240	600

V Belts Banded	A	B	C
Individual Section W&T (mm)	13 x 8	17 X 11	22 x 14
Centres of grooves P (mm)	15	19	25.40
Lo - Lp (mm)	16	22	34

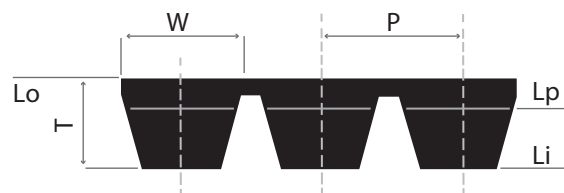

A - SECTION BANDED

Part No	Effective Length (mm)	Effective Length (inches)
A47/BAND	1194	47
A51/BAND	1295	51
A53/BAND	1346	53
A56/BAND	1422	56
A57/BAND	1448	57
A59/BAND	1499	59
A64/BAND	1626	64
A67/BAND	1702	67
A71/BAND	1803	71

Part No	Effective Length (mm)	Effective Length (inches)
A75/BAND	1905	75
A78/BAND	1981	78
A79/BAND	2007	79
A80/BAND	2032	80
A88/BAND	2235	88
A90/BAND	2286	90
A98/BAND	2489	98
A100/BAND	2540	100
A104/BAND	2642	104

Part No	Effective Length (mm)	Effective Length (inches)
A112/BAND	2845	112
A120/BAND	3048	120
A128/BAND	3251	128
A144/BAND	3658	144
A158/BAND	4013	158
A167/BAND	4242	167
A187/BAND	4750	187

B - SECTION BANDED

Part No	Effective Length (mm)	Effective Length (inches)
B60/BAND	1524	60
B65/BAND	1651	65
B67/BAND	1702	67
B70/BAND	1778	70
B71/BAND	1803	71
B72/BAND	1829	72
B73/BAND	1854	73
B74/BAND	1880	74
B75/BAND	1905	75
B76/BAND	1930	76
B78/BAND	1981	78
B79/BAND	2007	79
B80/BAND	2032	80

Part No	Effective Length (mm)	Effective Length (inches)
B81/BAND	2057	81
B82/BAND	2083	82
B83/BAND	2108	83
B84/BAND	2134	84
B85/BAND	2159	85
B86/BAND	2184	86
B87/BAND	2210	87
B88/BAND	2235	88
B89/BAND	2261	89
B90/BAND	2286	90
B91/BAND	2311	91
B92/BAND	2337	92
B93/BAND	2362	93

Part No	Effective Length (mm)	Effective Length (inches)
B94/BAND	2388	94
B95/BAND	2413	95
B96/BAND	2438	96
B97/BAND	2464	97
B98/BAND	2489	98
B99/BAND	2515	99
B100/BAND	2540	100
B101/BAND	2565	101
B102/BAND	2591	102
B104/BAND	2642	104
B105/BAND	2667	105
B106/BAND	2692	106
B107/BAND	2718	107

B - SECTION BANDED continued

Part No	Effective Length (mm)	Effective Length (inches)
B108/BAND	2743	108
B110/BAND	2794	110
B112/BAND	2845	112
B114/BAND	2896	114
B115/BAND	2921	115
B116/BAND	2946	116
B118/BAND	2997	118
B120/BAND	3048	120
B124/BAND	3150	124
B127/BAND	3226	127
B128/BAND	3251	128
B130/BAND	3302	130
B131/BAND	3327	131
B132/BAND	3353	132
B133/BAND	3378	133

Part No	Effective Length (mm)	Effective Length (inches)
B134/BAND	3404	134
B135/BAND	3429	135
B136/BAND	3454	136
B140/BAND	3556	140
B144/BAND	3658	144
B147/BAND	3734	147
B148/BAND	3759	148
B150/BAND	3810	150
B151/BAND	3835	151
B152/BAND	3861	152
B154/BAND	3912	154
B157/BAND	3988	157
B158/BAND	4013	158
B161/BAND	4089	161
B162/BAND	4115	162

Part No	Effective Length (mm)	Effective Length (inches)
B163/BAND	4140	163
B165/BAND	4191	165
B167/BAND	4242	167
B168/BAND	4267	168
B173/BAND	4394	173
B175/BAND	4445	175
B177/BAND	4496	177
B180/BAND	4572	180
B186/BAND	4724	186
B188/BAND	4775	188
B192/BAND	4877	192
B195/BAND	4953	195
B197/BAND	5004	197


C - SECTION BANDED

Part No	Effective Length (mm)	Effective Length (inches)
C90/BAND	2286	90
C98/BAND	2489	98
C99/BAND	2515	99
C100/BAND	2540	100
C102/BAND	2591	102
C104/BAND	2642	104
C105/BAND	2667	105
C106/BAND	2692	106
C108/BAND	2743	108
C110/BAND	2794	110
C112/BAND	2845	112
C115/BAND	2921	115
C118/BAND	2997	118

Part No	Effective Length (mm)	Effective Length (inches)
C120/BAND	3048	120
C124/BAND	3150	124
C128/BAND	3251	128
C130/BAND	3302	130
C134/BAND	3404	134
C136/BAND	3454	136
C140/BAND	3556	140
C142/BAND	3607	142
C144/BAND	3658	144
C146/BAND	3708	146
C148/BAND	3759	148
C151/BAND	3835	151
C153/BAND	3886	153

Part No	Effective Length (mm)	Effective Length (inches)
C158/BAND	4013	158
C160/BAND	4064	160
C165/BAND	4191	165
C166/BAND	4216	166
C168/BAND	4267	168
C173/BAND	4394	173
C177/BAND	4496	177
C180/BAND	4572	180
C195/BAND	4953	195
C210/BAND	5334	210
C240/BAND	6096	240

Wedge Belts Banded	SPZ	SPA	SPB	SPC
Individual Section W&T (mm)	9.7 x 8	12.7 x 10	16.3 x 7.8	23 x 18
Centres of grooves P (mm)	12.00	15.00	19.00	25.50
Lo - Lp (mm)	13	18	22	30

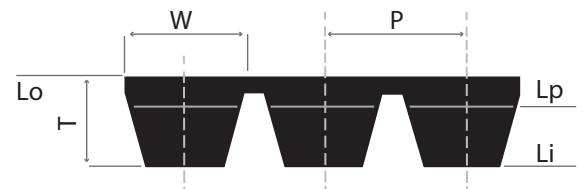

SPZ - SECTION BANDED

Part No	Effective Length (mm)	Effective Length (inches)
SPZ1250/BAND	1212	47.7
SPZ1400/BAND	1362	53.6
SPZ1500/BAND	1462	57.6

Part No	Effective Length (mm)	Effective Length (inches)
SPZ1600/BAND	1562	61.5
SPZ1700/BAND	1662	65.4
SPZ1800/BAND	1762	69.4

Part No	Effective Length (mm)	Effective Length (inches)
SPZ1900/BAND	1862	73.3
SPZ2000/BAND	1962	77.2
SPZ2120/BAND	2082	82.0

SPZ - SECTION BANDED continued

Part No	Effective Length (mm)	Effective Length (inches)
SPZ2240/BAND	2202	86.7
SPZ2360/BAND	2322	91.4
SPZ2500/BAND	2462	96.9

Part No	Effective Length (mm)	Effective Length (inches)
SPZ2650/BAND	2612	102.8
SPZ2800/BAND	2762	108.7
SPZ3000/BAND	2962	116.6

Part No	Effective Length (mm)	Effective Length (inches)
SPZ3150/BAND	3112	122.5
SPZ3350/BAND	3312	130.4
SPZ3550/BAND	3512	138.3

SPA - SECTION BANDED

Part No	Effective Length (mm)	Effective Length (inches)
SPA1250/BAND	1205	47.4
SPA1400/BAND	1355	53.3
SPA1500/BAND	1455	57.3
SPA1600/BAND	1555	61.2
SPA1700/BAND	1655	65.2
SPA1800/BAND	1755	69.1
SPA1900/BAND	1855	73.0

Part No	Effective Length (mm)	Effective Length (inches)
SPA2120/BAND	2075	81.7
SPA2150/BAND	2105	82.9
SPA2240/BAND	2195	86.4
SPA2360/BAND	2315	91.1
SPA2500/BAND	2455	96.7
SPA2650/BAND	2605	102.6
SPA2800/BAND	2755	108.5

Part No	Effective Length (mm)	Effective Length (inches)
SPA3000/BAND	2955	116.3
SPA3350/BAND	3305	130.1
SPA3550/BAND	3505	138.0
SPA3750/BAND	3705	145.9
SPA4000/BAND	3955	155.7
SPA4250/BAND	4205	165.6
SPA4500/BAND	4455	175.4

SPB - SECTION BANDED

Part No	Effective Length (mm)	Effective Length (inches)
SPB1600/BAND	1540	60.6
SPB1800/BAND	1740	68.5
SPB2000/BAND	1940	76.4
SPB2120/BAND	2060	81.1
SPB2240/BAND	2180	85.8
SPB2360/BAND	2300	90.6
SPB2500/BAND	2440	96.1
SPB2650/BAND	2590	102.0
SPB2800/BAND	2740	107.9

Part No	Effective Length (mm)	Effective Length (inches)
SPB3000/BAND	2940	115.7
SPB3150/BAND	3090	121.7
SPB3350/BAND	3290	129.5
SPB3550/BAND	3490	137.4
SPB3750/BAND	3690	145.3
SPB4000/BAND	3940	155.1
SPB4250/BAND	4190	165.0
SPB4500/BAND	4440	174.8
SPB4750/BAND	4690	184.6

Part No	Effective Length (mm)	Effective Length (inches)
SPB5000/BAND	4940	194.5
SPB5300/BAND	5240	206.3
SPB5600/BAND	5540	218.1
SPB6000/BAND	5940	233.9
SPB6300/BAND	6240	245.7
SPB6700/BAND	6640	261.4
SPB7100/BAND	7040	277.2
SPB7500/BAND	7440	292.9
SPB8000/BAND	7940	312.6

SPC - SECTION BANDED

Part No	Effective Length (mm)	Effective Length (inches)
SPC2360/BAND	2277	89.6
SPC2500/BAND	2417	95.2
SPC2800/BAND	2717	107.0
SPC3000/BAND	2917	114.8
SPC3150/BAND	3067	120.7
SPC3350/BAND	3267	128.6
SPC3550/BAND	3467	136.5
SPC3750/BAND	3667	144.4
SPC4000/BAND	3917	154.2
SPC4250/BAND	4167	164.1

Part No	Effective Length (mm)	Effective Length (inches)
SPC4500/BAND	4417	173.9
SPC4750/BAND	4667	183.7
SPC5000/BAND	4917	193.6
SPC5300/BAND	5217	205.4
SPC5600/BAND	5517	217.2
SPC6000/BAND	5917	233.0
SPC6300/BAND	6217	244.8
SPC6700/BAND	6617	260.5
SPC7100/BAND	7017	276.3
SPC7500/BAND	7417	292.0

Part No	Effective Length (mm)	Effective Length (inches)
SPC8000/BAND	7917	311.7
SPC8500/BAND	8417	331.4
SPC9000/BAND	8917	351.1
SPC9500/BAND	9417	370.7
SPC10000/BAND	9917	390.4
SPC10600/BAND	10517	414.1
SPC11200/BAND	11117	437.7
SPC11800/BAND	11717	461.3
SPC12500/BAND	12417	488.9



V-BELT LINK BELTING

Description
V-belt Link belting offers a fast alternative to a V-Belt or Wedge Belt in an emergency break down situation, due to the ease in which the belts length can be adjusted to suit any application.

Also used as preferred belting product in applications where an endless belt can not be fitted without an expensive machine breakdown as it can be threaded into place and connected in situ without the need for shafts and bearings to be dismantled.



Part No.	Belt width (mm)	Belt Depth (mm)	V-Belt Section
Z-Link Twist Belt	10	6	Z
A-Link Twist Belt	13	8	A
B-Link Twist Belt	17	11	B
C-Link Twist Belt	22	14	C

DUNLOP V-Belt Link Belting is the ideal replacement substitute for conventional rubber V-Belts and offers a permanent or ideal temporary replacement for conventional rubber V-Belts. Dunlop V-Belt Link Belting combines superior strength, durability and quick, easy assembly to keep equipment up and running at the same running horse power ratings as rubber belts.

- Durable urethane coating precision machined sides for smooth engagement
- Rugged, woven polyester fabric for strength and longer belt life
- Dunlop urethane construction offers superior resistance to most common industrial solvents and chemicals, oil, water and extreme temperatures, from -25°C to 80°C
- Dissipates heat so they run cooler than conventional belts

INSTALLATION

Installation and assembly is as easy as a snap and a twist. No special tools are required to couple or uncouple each belt. Belts can be made to accommodate any length, which makes them ideal for emergency repairs and replacements. Once assembled, V-Link Belts are installed in a fraction of the time needed for endless rubber belts without removing bearings, motors or shafts.

They are suitable in harsh environments and are ideal for metal processing, machine tool, agricultural, packaging, coal and aggregate, pulp and paper, marine, air handling, petrochemical, woodworking, conveying and food industries, HVAC.





V & WEDGE BELTS




WEDGE BELTS WRAPPED

Description

Wrapped Wedge Belts are designated by letters standing for their cross-section, e.g. SPA followed by a number e.g. 1600 which specifies the belts pitch length L_p in mm. Due to their high power ratings savings can be made over classical V-Belts, smaller pulley diameters and reduced numbers of belts and be incorporated into more compact drives.

Wedge Belts are produced to BS3790, DIN 7753 and AFOR T 47-117 standards. They are manufactured in the cross-sections SPZ, SPA, SPB and SPC in a range of over 400 lengths.

Dunlop V-belts have specially treated jackets to give superior anti-static, heat and oil-resistant properties and are static conductive to ISO1813.

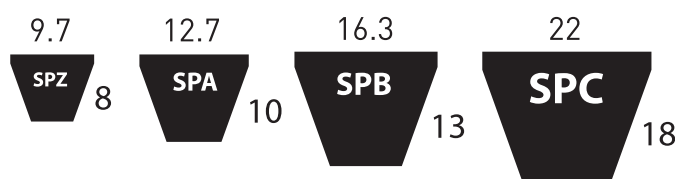

SPZ - SECTION

Part No	Outside Length (mm)	Pitch Length (mm)	Inside Length (mm)
SPZ487	500	487	449
SPZ500	513	500	462
SPZ512	525	512	474
SPZ530	543	530	492
SPZ545	558	545	507
SPZ560	573	560	522
SPZ562	575	562	524
SPZ580	593	580	542
SPZ587	600	587	549
SPZ607	620	607	569
SPZ612	625	612	574
SPZ615	628	615	577
SPZ630	643	630	592
SPZ637	650	637	599
SPZ662	675	662	624
SPZ670	683	670	632
SPZ687	700	687	649
SPZ707	720	707	669
SPZ710	723	710	672
SPZ722	735	722	684
SPZ732	745	732	694
SPZ737	750	737	699
SPZ750	763	750	712
SPZ757	770	757	719
SPZ760	773	760	722
SPZ762	775	762	724
SPZ772	785	772	734

Part No	Outside Length (mm)	Pitch Length (mm)	Inside Length (mm)
SPZ775	788	775	737
SPZ787	800	787	749
SPZ800	813	800	762
SPZ812	825	812	774
SPZ825	838	825	787
SPZ837	850	837	799
SPZ850	863	850	812
SPZ862	875	862	824
SPZ875	888	875	837
SPZ887	900	887	849
SPZ900	913	900	862
SPZ912	925	912	874
SPZ922	935	922	884
SPZ925	938	925	887
SPZ937	950	937	899
SPZ940	953	940	902
SPZ950	963	950	912
SPZ962	975	962	924
SPZ975	988	975	937
SPZ987	1000	987	949
SPZ1000	1013	1000	962
SPZ1010	1023	1010	972
SPZ1012	1025	1012	974
SPZ1020	1033	1020	982
SPZ1024	1037	1024	986
SPZ1030	1043	1030	992
SPZ1037	1050	1037	999

Part No	Outside Length (mm)	Pitch Length (mm)	Inside Length (mm)
SPZ1040	1053	1040	1002
SPZ1047	1060	1047	1009
SPZ1060	1073	1060	1022
SPZ1062	1075	1062	1024
SPZ1077	1090	1077	1039
SPZ1080	1093	1080	1042
SPZ1087	1100	1087	1049
SPZ1090	1103	1090	1052
SPZ1100	1113	1100	1062
SPZ1112	1125	1112	1074
SPZ1120	1133	1120	1082
SPZ1125	1138	1125	1087
SPZ1137	1150	1137	1099
SPZ1140	1153	1140	1102
SPZ1147	1160	1147	1109
SPZ1150	1163	1150	1112
SPZ1160	1173	1160	1122
SPZ1162	1175	1162	1124
SPZ1180	1193	1180	1142
SPZ1187	1200	1187	1149
SPZ1200	1213	1200	1162
SPZ1202	1215	1202	1164
SPZ1212	1225	1212	1174
SPZ1215	1228	1215	1177
SPZ1220	1233	1220	1182
SPZ1230	1243	1230	1192
SPZ1237	1250	1237	1199

SPZ - SECTION continued

Part No	Outside Length (mm)	Pitch Length (mm)	Inside Length (mm)
SPZ1250	1263	1250	1212
SPZ1262	1275	1262	1224
SPZ1270	1283	1270	1232
SPZ1280	1293	1280	1242
SPZ1285	1298	1285	1247
SPZ1287	1300	1287	1249
SPZ1300	1313	1300	1262
SPZ1312	1325	1312	1274
SPZ1320	1333	1320	1282
SPZ1337	1350	1337	1299
SPZ1340	1353	1340	1302
SPZ1347	1360	1347	1309
SPZ1360	1373	1360	1322
SPZ1362	1375	1362	1324
SPZ1375	1388	1375	1337
SPZ1387	1400	1387	1349
SPZ1400	1413	1400	1362
SPZ1412	1425	1412	1374
SPZ1420	1433	1420	1382
SPZ1437	1450	1437	1399
SPZ1450	1463	1450	1412
SPZ1462	1475	1462	1424
SPZ1470	1483	1470	1432
SPZ1482	1495	1482	1444
SPZ1487	1500	1487	1449
SPZ1500	1513	1500	1462
SPZ1512	1525	1512	1474
SPZ1520	1533	1520	1482
SPZ1537	1550	1537	1499
SPZ1550	1563	1550	1512
SPZ1560	1573	1560	1522
SPZ1562	1575	1562	1524
SPZ1587	1600	1587	1549
SPZ1600	1613	1600	1562
SPZ1612	1625	1612	1574

Part No	Outside Length (mm)	Pitch Length (mm)	Inside Length (mm)
SPZ1637	1650	1637	1599
SPZ1650	1663	1650	1612
SPZ1662	1675	1662	1624
SPZ1675	1688	1675	1637
SPZ1687	1700	1687	1649
SPZ1700	1713	1700	1662
SPZ1712	1725	1712	1674
SPZ1732	1745	1732	1694
SPZ1737	1750	1737	1699
SPZ1750	1763	1750	1712
SPZ1762	1775	1762	1724
SPZ1782	1795	1782	1744
SPZ1787	1800	1787	1749
SPZ1800	1813	1800	1762
SPZ1812	1825	1812	1774
SPZ1837	1850	1837	1799
SPZ1850	1863	1850	1812
SPZ1862	1875	1862	1824
SPZ1882	1895	1882	1844
SPZ1887	1900	1887	1849
SPZ1900	1913	1900	1862
SPZ1937	1950	1937	1899
SPZ1950	1963	1950	1912
SPZ1962	1975	1962	1924
SPZ1987	2000	1987	1949
SPZ2000	2013	2000	1962
SPZ2019	2032	2019	1981
SPZ2030	2043	2030	1992
SPZ2037	2050	2037	1999
SPZ2040	2053	2040	2002
SPZ2060	2073	2060	2022
SPZ2062	2075	2062	2024
SPZ2080	2093	2080	2042
SPZ2087	2100	2087	2049
SPZ2120	2133	2120	2082

Part No	Outside Length (mm)	Pitch Length (mm)	Inside Length (mm)
SPZ2137	2150	2137	2099
SPZ2160	2173	2160	2122
SPZ2180	2193	2180	2142
SPZ2187	2200	2187	2149
SPZ2200	2213	2200	2162
SPZ2240	2253	2240	2202
SPZ2262	2275	2262	2224
SPZ2280	2293	2280	2242
SPZ2287	2300	2287	2249
SPZ2300	2313	2300	2262
SPZ2360	2373	2360	2322
SPZ2410	2423	2410	2372
SPZ2430	2443	2430	2392
SPZ2437	2450	2437	2399
SPZ2487	2500	2487	2449
SPZ2500	2513	2500	2462
SPZ2540	2553	2540	2502
SPZ2587	2600	2587	2549
SPZ2650	2663	2650	2612
SPZ2690	2703	2690	2652
SPZ2720	2733	2720	2682
SPZ2737	2750	2737	2699
SPZ2800	2813	2800	2762
SPZ2840	2853	2840	2802
SPZ2900	2913	2900	2862
SPZ3000	3013	3000	2962
SPZ3070	3083	3070	3032
SPZ3150	3163	3150	3112
SPZ3170	3183	3170	3132
SPZ3250	3263	3250	3212
SPZ3350	3363	3350	3312
SPZ3550	3563	3550	3512
SPZ3900	3913	3900	3862

SPA - SECTION

Part No	Outside Length (mm)	Pitch Length (mm)	Inside Length (mm)
SPA657	675	657	612
SPA707	725	707	662
SPA732	750	732	687
SPA750	768	750	705
SPA757	775	757	712
SPA782	800	782	737

Part No	Outside Length (mm)	Pitch Length (mm)	Inside Length (mm)
SPA800	818	800	755
SPA807	825	807	762
SPA825	843	825	780
SPA832	850	832	787
SPA850	868	850	805
SPA857	875	857	812

Part No	Outside Length (mm)	Pitch Length (mm)	Inside Length (mm)
SPA875	893	875	830
SPA882	900	882	837
SPA900	918	900	855
SPA907	925	907	862
SPA925	943	925	880
SPA932	950	932	887

SPA - SECTION

Part No	Outside Length (mm)	Pitch Length (mm)	Inside Length (mm)
SPA950	968	950	905
SPA957	975	957	912
SPA967	985	967	922
SPA975	993	975	930
SPA982	1000	982	937
SPA1000	1018	1000	955
SPA1007	1025	1007	962
SPA1020	1038	1020	975
SPA1030	1048	1030	985
SPA1032	1050	1032	987
SPA1060	1078	1060	1015
SPA1082	1100	1082	1037
SPA1090	1108	1090	1045
SPA1107	1125	1107	1062
SPA1120	1138	1120	1075
SPA1132	1150	1132	1087
SPA1140	1158	1140	1095
SPA1150	1168	1150	1105
SPA1157	1175	1157	1112
SPA1180	1198	1180	1135
SPA1200	1218	1200	1155
SPA1207	1225	1207	1162
SPA1215	1233	1215	1170
SPA1220	1238	1220	1175
SPA1232	1250	1232	1187
SPA1250	1268	1250	1205
SPA1257	1275	1257	1212
SPA1272	1290	1272	1227
SPA1280	1298	1280	1235
SPA1282	1300	1282	1237
SPA1300	1318	1300	1255
SPA1307	1325	1307	1262
SPA1320	1338	1320	1275
SPA1332	1350	1332	1287
SPA1357	1375	1357	1312
SPA1360	1378	1360	1315
SPA1382	1400	1382	1337
SPA1400	1418	1400	1355
SPA1407	1425	1407	1362
SPA1425	1443	1425	1380
SPA1432	1450	1432	1387
SPA1450	1468	1450	1405
SPA1457	1475	1457	1412
SPA1482	1500	1482	1437
SPA1500	1518	1500	1455

Part No	Outside Length (mm)	Pitch Length (mm)	Inside Length (mm)
SPA1507	1525	1507	1462
SPA1532	1550	1532	1487
SPA1550	1568	1550	1505
SPA1557	1575	1557	1512
SPA1560	1578	1560	1515
SPA1582	1600	1582	1537
SPA1600	1618	1600	1555
SPA1607	1625	1607	1562
SPA1632	1650	1632	1587
SPA1650	1668	1650	1605
SPA1657	1675	1657	1612
SPA1682	1700	1682	1637
SPA1700	1718	1700	1655
SPA1707	1725	1707	1662
SPA1732	1750	1732	1687
SPA1740	1758	1740	1695
SPA1750	1768	1750	1705
SPA1757	1775	1757	1712
SPA1782	1800	1782	1737
SPA1800	1818	1800	1755
SPA1807	1825	1807	1762
SPA1832	1850	1832	1787
SPA1850	1868	1850	1805
SPA1857	1875	1857	1812
SPA1882	1900	1882	1837
SPA1900	1918	1900	1855
SPA1907	1925	1907	1862
SPA1925	1943	1925	1880
SPA1932	1950	1932	1887
SPA1950	1968	1950	1905
SPA1957	1975	1957	1912
SPA1982	2000	1982	1937
SPA2000	2018	2000	1955
SPA2032	2050	2032	1987
SPA2057	2075	2057	2012
SPA2060	2078	2060	2015
SPA2067	2085	2067	2022
SPA2080	2098	2080	2035
SPA2082	2100	2082	2037
SPA2120	2138	2120	2075
SPA2132	2150	2132	2087
SPA2160	2178	2160	2115
SPA2180	2198	2180	2135
SPA2182	2200	2182	2137
SPA2207	2225	2207	2162

Part No	Outside Length (mm)	Pitch Length (mm)	Inside Length (mm)
SPA2232	2250	2232	2187
SPA2240	2258	2240	2195
SPA2282	2300	2282	2237
SPA2300	2318	2300	2255
SPA2307	2325	2307	2262
SPA2332	2350	2332	2287
SPA2360	2378	2360	2315
SPA2382	2400	2382	2337
SPA2430	2448	2430	2385
SPA2432	2450	2432	2387
SPA2437	2455	2437	2392
SPA2450	2468	2450	2405
SPA2482	2500	2482	2437
SPA2500	2518	2500	2455
SPA2532	2550	2532	2487
SPA2550	2568	2550	2505
SPA2580	2598	2580	2535
SPA2582	2600	2582	2537
SPA2607	2625	2607	2562
SPA2632	2650	2632	2587
SPA2650	2668	2650	2605
SPA2682	2700	2682	2637
SPA2720	2738	2720	2675
SPA2732	2750	2732	2687
SPA2782	2800	2782	2737
SPA2800	2818	2800	2755
SPA2832	2850	2832	2787
SPA2847	2865	2847	2802
SPA2882	2900	2882	2837
SPA2900	2918	2900	2855
SPA2932	2950	2932	2887
SPA3170	3188	3170	3125
SPA3182	3200	3182	3137
SPA3250	3268	3250	3205
SPA3282	3300	3282	3237
SPA3350	3368	3350	3305
SPA3382	3400	3382	3337
SPA3450	3468	3450	3405
SPA3550	3568	3550	3505
SPA3650	3668	3650	3605
SPA3750	3768	3750	3705
SPA4000	4018	4000	3955
SPA4250	4268	4250	4205
SPA4500	4518	4500	4455

SPB - SECTION

Part No	Outside Length (mm)	Pitch Length (mm)	Inside Length (mm)
SPB1250	1272	1250	1190
SPB1260	1282	1260	1200
SPB1320	1342	1320	1260
SPB1340	1362	1340	1280
SPB1360	1382	1360	1300
SPB1400	1422	1400	1340
SPB1410	1432	1410	1350
SPB1450	1472	1450	1390
SPB1500	1522	1500	1440
SPB1510	1532	1510	1450
SPB1550	1572	1550	1490
SPB1580	1602	1580	1520
SPB1590	1612	1590	1530
SPB1600	1622	1600	1540
SPB1650	1672	1650	1590
SPB1690	1712	1690	1630
SPB1700	1722	1700	1640
SPB1725	1747	1725	1665
SPB1750	1772	1750	1690
SPB1775	1797	1775	1715
SPB1800	1822	1800	1740
SPB1850	1872	1850	1790
SPB1860	1882	1860	1800
SPB1900	1922	1900	1840
SPB1950	1972	1950	1890
SPB1980	2002	1980	1920
SPB2000	2022	2000	1940
SPB2020	2042	2020	1960
SPB2060	2082	2060	2000
SPB2098	2120	2098	2038
SPB2120	2142	2120	2060
SPB2150	2172	2150	2090
SPB2180	2202	2180	2120
SPB2200	2222	2200	2140
SPB2240	2262	2240	2180

Part No	Outside Length (mm)	Pitch Length (mm)	Inside Length (mm)
SPB2264	2286	2264	2204
SPB2280	2302	2280	2220
SPB2300	2322	2300	2240
SPB2360	2382	2360	2300
SPB2391	2413	2391	2331
SPB2410	2432	2410	2350
SPB2425	2447	2425	2365
SPB2430	2452	2430	2370
SPB2450	2472	2450	2390
SPB2500	2522	2500	2440
SPB2530	2552	2530	2470
SPB2580	2602	2580	2520
SPB2600	2622	2600	2540
SPB2650	2672	2650	2590
SPB2680	2702	2680	2620
SPB2720	2742	2720	2660
SPB2730	2752	2730	2670
SPB2750	2772	2750	2690
SPB2780	2802	2780	2720
SPB2800	2822	2800	2740
SPB2840	2862	2840	2780
SPB2850	2872	2850	2790
SPB2900	2922	2900	2840
SPB2950	2972	2950	2890
SPB2990	3012	2990	2930
SPB3000	3022	3000	2940
SPB3070	3092	3070	3010
SPB3150	3172	3150	3090
SPB3170	3192	3170	3110
SPB3250	3272	3250	3190
SPB3320	3342	3320	3260
SPB3340	3362	3340	3280
SPB3350	3372	3350	3290
SPB3400	3422	3400	3340
SPB3450	3472	3450	3390

Part No	Outside Length (mm)	Pitch Length (mm)	Inside Length (mm)
SPB3500	3522	3500	3440
SPB3504	3526	3504	3444
SPB3550	3572	3550	3490
SPB3600	3622	3600	3540
SPB3650	3672	3650	3590
SPB3700	3722	3700	3640
SPB3750	3772	3750	3690
SPB3800	3822	3800	3740
SPB3870	3892	3870	3810
SPB4000	4022	4000	3940
SPB4060	4082	4060	4000
SPB4120	4142	4120	4060
SPB4250	4272	4250	4190
SPB4310	4332	4310	4250
SPB4370	4392	4370	4310
SPB4500	4522	4500	4440
SPB4560	4582	4560	4500
SPB4750	4772	4750	4690
SPB4820	4842	4820	4760
SPB4870	4892	4870	4810
SPB5000	5022	5000	4940
SPB5070	5092	5070	5010
SPB5300	5322	5300	5240
SPB5380	5402	5380	5320
SPB5600	5622	5600	5540
SPB5680	5702	5680	5620
SPB6000	6022	6000	5940
SPB6300	6322	6300	6240
SPB6700	6722	6700	6640
SPB7100	7122	7100	7040
SPB7500	7522	7500	7440
SPB8000	8022	8000	7940

SPC - SECTION

Part No	Outside Length (mm)	Pitch Length (mm)	Inside Length (mm)
SPC1700	1730	1700	1617
SPC2000	2030	2000	1917
SPC2120	2150	2120	2037
SPC2240	2270	2240	2157
SPC2360	2390	2360	2277
SPC2500	2530	2500	2417

Part No	Outside Length (mm)	Pitch Length (mm)	Inside Length (mm)
SPC2650	2680	2650	2567
SPC2700	2730	2700	2617
SPC2800	2830	2800	2717
SPC2850	2880	2850	2767
SPC2900	2930	2900	2817
SPC3000	3030	3000	2917

Part No	Outside Length (mm)	Pitch Length (mm)	Inside Length (mm)
SPC3080	3110	3080	2997
SPC3100	3130	3100	3017
SPC3150	3180	3150	3067
SPC3200	3230	3200	3117
SPC3350	3380	3350	3267
SPC3450	3480	3450	3367

SPC - SECTION

Part No	Outside Length (mm)	Pitch Length (mm)	Inside Length (mm)
SPC3500	3530	3500	3417
SPC3550	3580	3550	3467
SPC3750	3780	3750	3667
SPC3800	3830	3800	3717
SPC3810	3840	3810	3727
SPC3830	3860	3830	3747
SPC3912	3942	3912	3829
SPC3940	3970	3940	3857
SPC4000	4030	4000	3917
SPC4100	4130	4100	4017
SPC4250	4280	4250	4167
SPC4400	4430	4400	4317
SPC4500	4530	4500	4417

Part No	Outside Length (mm)	Pitch Length (mm)	Inside Length (mm)
SPC4750	4780	4750	4667
SPC5000	5030	5000	4917
SPC5300	5330	5300	5217
SPC5600	5630	5600	5517
SPC5700	5730	5700	5617
SPC5750	5780	5750	5667
SPC6000	6030	6000	5917
SPC6300	6330	6300	6217
SPC6500	6530	6500	6417
SPC6700	6730	6700	6617
SPC7100	7130	7100	7017
SPC7500	7530	7500	7417
SPC7800	7830	7800	7717

Part No	Outside Length (mm)	Pitch Length (mm)	Inside Length (mm)
SPC8000	8030	8000	7917
SPC8500	8530	8500	8417
SPC9000	9030	9000	8917
SPC9500	9530	9500	9417
SPC10000	10030	10000	9917
SPC10600	10630	10600	10517
SPC11200	11230	11200	11117
SPC11800	11830	11800	11717
SPC12000	12030	12000	11917
SPC12500	12530	12500	12417
SPC12800	12830	12800	12717
SPC14000	14030	14000	13917





V & WEDGE BELTS




WEDGE BELTS RAW EDGE COGGED

Description

Raw Edge Cogged Wedge Belts are high performance and are designated by letters standing for their cross-section, e.g. SPAX followed by a number e.g. 1600 which specifies the belts pitch length L_p in mm. They enable; resistance to repeated flexing, compact drives, reduced weight, cost savings, small pulley diameters and high drive ratios.

They are manufactured in the cross-sections SPZX, SPAX, SPBX and SPCX in a range of over 300 lengths and are static conductive to ISO1813.

Dunlop V-belts have specially treated jackets to give superior anti-static, heat and oil-resistant properties and are static conductive to ISO1813.

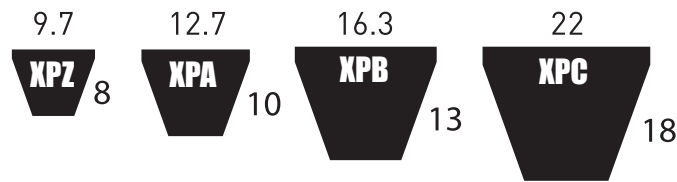

XPZ - SECTION

Part No	Outside Length (mm)	Pitch Length (mm)	Inside Length (mm)
XPZ512	525	512	474
XPZ562	575	562	524
XPZ587	600	587	549
XPZ600	613	600	562
XPZ612	625	612	574
XPZ630	643	630	592
XPZ637	650	637	599
XPZ660	673	660	622
XPZ662	675	662	624
XPZ670	683	670	632
XPZ687	700	687	649
XPZ710	723	710	672
XPZ722	735	722	684
XPZ725	738	725	687
XPZ730	743	730	692
XPZ737	750	737	699
XPZ750	763	750	712
XPZ762	775	762	724
XPZ772	785	772	734
XPZ787	800	787	749
XPZ800	813	800	762
XPZ812	825	812	774
XPZ817	830	817	779
XPZ825	838	825	787
XPZ837	850	837	799
XPZ850	863	850	812
XPZ862	875	862	824
XPZ875	888	875	837

Part No	Outside Length (mm)	Pitch Length (mm)	Inside Length (mm)
XPZ887	900	887	849
XPZ900	913	900	862
XPZ912	925	912	874
XPZ917	930	917	879
XPZ925	938	925	887
XPZ937	950	937	899
XPZ950	963	950	912
XPZ962	975	962	924
XPZ975	988	975	937
XPZ987	1000	987	949
XPZ1000	1013	1000	962
XPZ1012	1025	1012	974
XPZ1030	1043	1030	992
XPZ1037	1050	1037	999
XPZ1047	1060	1047	1009
XPZ1057	1070	1057	1019
XPZ1060	1073	1060	1022
XPZ1062	1075	1062	1024
XPZ1077	1090	1077	1039
XPZ1080	1093	1080	1042
XPZ1087	1100	1087	1049
XPZ1110	1123	1110	1072
XPZ1112	1125	1112	1074
XPZ1120	1133	1120	1082
XPZ1137	1150	1137	1099
XPZ1140	1153	1140	1102
XPZ1150	1163	1150	1112
XPZ1162	1175	1162	1124

Part No	Outside Length (mm)	Pitch Length (mm)	Inside Length (mm)
XPZ1180	1193	1180	1142
XPZ1187	1200	1187	1149
XPZ1202	1215	1202	1164
XPZ1212	1225	1212	1174
XPZ1220	1233	1220	1182
XPZ1237	1250	1237	1199
XPZ1250	1263	1250	1212
XPZ1262	1275	1262	1224
XPZ1270	1283	1270	1232
XPZ1280	1293	1280	1242
XPZ1287	1300	1287	1249
XPZ1312	1325	1312	1274
XPZ1320	1333	1320	1282
XPZ1337	1350	1337	1299
XPZ1340	1353	1340	1302
XPZ1360	1373	1360	1322
XPZ1362	1375	1362	1324
XPZ1387	1400	1387	1349
XPZ1400	1413	1400	1362
XPZ1412	1425	1412	1374
XPZ1420	1433	1420	1382
XPZ1437	1450	1437	1399
XPZ1450	1463	1450	1412
XPZ1462	1475	1462	1424
XPZ1470	1483	1470	1432
XPZ1487	1500	1487	1449
XPZ1500	1513	1500	1462
XPZ1512	1525	1512	1474

XPZ - SECTION continued

Part No	Outside Length (mm)	Pitch Length (mm)	Inside Length (mm)	Part No	Outside Length (mm)	Pitch Length (mm)	Inside Length (mm)	Part No	Outside Length (mm)	Pitch Length (mm)	Inside Length (mm)
XPZ1520	1533	1520	1482	XPZ1850	1863	1850	1812	XPZ2410	2423	2410	2372
XPZ1537	1550	1537	1499	XPZ1900	1913	1900	1862	XPZ2500	2513	2500	2462
XPZ1550	1563	1550	1512	XPZ1950	1963	1950	1912	XPZ2540	2553	2540	2502
XPZ1560	1573	1560	1522	XPZ2000	2013	2000	1962	XPZ2650	2663	2650	2612
XPZ1587	1600	1587	1549	XPZ2030	2043	2030	1992	XPZ2690	2703	2690	2652
XPZ1600	1613	1600	1562	XPZ2040	2053	2040	2002	XPZ2800	2813	2800	2762
XPZ1612	1625	1612	1574	XPZ2080	2093	2080	2042	XPZ2840	2853	2840	2802
XPZ1650	1663	1650	1612	XPZ2120	2133	2120	2082	XPZ3000	3013	3000	2962
XPZ1662	1675	1662	1624	XPZ2160	2173	2160	2122	XPZ3150	3163	3150	3112
XPZ1700	1713	1700	1662	XPZ2200	2213	2200	2162	XPZ3170	3183	3170	3132
XPZ1750	1763	1750	1712	XPZ2240	2253	2240	2202	XPZ3350	3363	3350	3312
XPZ1762	1775	1762	1724	XPZ2280	2293	2280	2242	XPZ3550	3563	3550	3512
XPZ1800	1813	1800	1762	XPZ2360	2373	2360	2322				

XPA - SECTION

Part No	Outside Length (mm)	Pitch Length (mm)	Inside Length (mm)	Part No	Outside Length (mm)	Pitch Length (mm)	Inside Length (mm)	Part No	Outside Length (mm)	Pitch Length (mm)	Inside Length (mm)
XPA667	685	667	622	XPA1057	1075	1057	1012	XPA1400	1418	1400	1355
XPA682	700	682	637	XPA1060	1078	1060	1015	XPA1407	1425	1407	1362
XPA732	750	732	687	XPA1082	1100	1082	1037	XPA1420	1438	1420	1375
XPA750	768	750	705	XPA1090	1108	1090	1045	XPA1425	1443	1425	1380
XPA757	775	757	712	XPA1107	1125	1107	1062	XPA1432	1450	1432	1387
XPA775	793	775	730	XPA1120	1138	1120	1075	XPA1442	1460	1442	1397
XPA782	800	782	737	XPA1132	1150	1132	1087	XPA1450	1468	1450	1405
XPA800	818	800	755	XPA1142	1160	1142	1097	XPA1457	1475	1457	1412
XPA807	825	807	762	XPA1150	1168	1150	1105	XPA1462	1480	1462	1417
XPA825	843	825	780	XPA1157	1175	1157	1112	XPA1482	1500	1482	1437
XPA832	850	832	787	XPA1170	1188	1170	1125	XPA1500	1518	1500	1455
XPA850	868	850	805	XPA1172	1190	1172	1127	XPA1507	1525	1507	1462
XPA857	875	857	812	XPA1180	1198	1180	1135	XPA1522	1540	1522	1477
XPA882	900	882	837	XPA1182	1200	1182	1137	XPA1532	1550	1532	1487
XPA900	918	900	855	XPA1207	1225	1207	1162	XPA1550	1568	1550	1505
XPA907	925	907	862	XPA1232	1250	1232	1187	XPA1557	1575	1557	1512
XPA925	943	925	880	XPA1250	1268	1250	1205	XPA1575	1593	1575	1530
XPA932	950	932	887	XPA1257	1275	1257	1212	XPA1582	1600	1582	1537
XPA950	968	950	905	XPA1272	1290	1272	1227	XPA1600	1618	1600	1555
XPA957	975	957	912	XPA1280	1298	1280	1235	XPA1607	1625	1607	1562
XPA969	987	969	924	XPA1282	1300	1282	1237	XPA1632	1650	1632	1587
XPA975	993	975	930	XPA1307	1325	1307	1262	XPA1650	1668	1650	1605
XPA982	1000	982	937	XPA1320	1338	1320	1275	XPA1682	1700	1682	1637
XPA1000	1018	1000	955	XPA1332	1350	1332	1287	XPA1700	1718	1700	1655
XPA1007	1025	1007	962	XPA1357	1375	1357	1312	XPA1732	1750	1732	1687
XPA1030	1048	1030	985	XPA1360	1378	1360	1315	XPA1750	1768	1750	1705
XPA1032	1050	1032	987	XPA1382	1400	1382	1337	XPA1757	1775	1757	1712

XPA - SECTION continued

Part No	Outside Length (mm)	Pitch Length (mm)	Inside Length (mm)	Part No	Outside Length (mm)	Pitch Length (mm)	Inside Length (mm)	Part No	Outside Length (mm)	Pitch Length (mm)	Inside Length (mm)
XPA1782	1800	1782	1737	XPA2160	2178	2160	2115	XPA2720	2738	2720	2675
XPA1800	1818	1800	1755	XPA2180	2198	2180	2135	XPA2730	2748	2730	2685
XPA1832	1850	1832	1787	XPA2240	2258	2240	2195	XPA2732	2750	2732	2687
XPA1850	1868	1850	1805	XPA2282	2300	2282	2237	XPA2782	2800	2782	2737
XPA1900	1918	1900	1855	XPA2300	2318	2300	2255	XPA2800	2818	2800	2755
XPA1932	1950	1932	1887	XPA2360	2378	2360	2315	XPA2900	2918	2900	2855
XPA1950	1968	1950	1905	XPA2432	2450	2432	2387	XPA3000	3018	3000	2955
XPA1957	1975	1957	1912	XPA2482	2500	2482	2437	XPA3150	3168	3150	3105
XPA1982	2000	1982	1937	XPA2500	2518	2500	2455	XPA3350	3368	3350	3305
XPA2000	2018	2000	1955	XPA2532	2550	2532	2487	XPA3550	3568	3550	3505
XPA2032	2050	2032	1987	XPA2580	2598	2580	2535	XPA3750	3768	3750	3705
XPA2057	2075	2057	2012	XPA2607	2625	2607	2562	XPA4000	4018	4000	3955
XPA2060	2078	2060	2015	XPA2632	2650	2632	2587	XPA4250	4268	4250	4205
XPA2082	2100	2082	2037	XPA2650	2668	2650	2605	XPA4500	4518	4500	4455
XPA2120	2138	2120	2075	XPA2682	2700	2682	2637				

XPB - SECTION

Part No	Outside Length (mm)	Pitch Length (mm)	Inside Length (mm)	Part No	Outside Length (mm)	Pitch Length (mm)	Inside Length (mm)	Part No	Outside Length (mm)	Pitch Length (mm)	Inside Length (mm)
XPB1000	1022	1000	940	XPB2150	2172	2150	2090	XPB4500	4522	4500	4440
XPB1060	1082	1060	1000	XPB2240	2262	2240	2180	XPB4750	4772	4750	4690
XPB1120	1142	1120	1060	XPB2280	2302	2280	2220	XPB5000	5022	5000	4940
XPB1180	1202	1180	1120	XPB2360	2382	2360	2300				
XPB1250	1272	1250	1190	XPB2410	2432	2410	2350				
XPB1260	1282	1260	1200	XPB2500	2522	2500	2440				
XPB1320	1342	1320	1260	XPB2530	2552	2530	2470				
XPB1340	1362	1340	1280	XPB2650	2672	2650	2590				
XPB1400	1422	1400	1340	XPB2680	2702	2680	2620				
XPB1410	1432	1410	1350	XPB2800	2822	2800	2740				
XPB1450	1472	1450	1390	XPB2840	2862	2840	2780				
XPB1500	1522	1500	1440	XPB2900	2922	2900	2840				
XPB1510	1532	1510	1450	XPB2990	3012	2990	2930				
XPB1550	1572	1550	1490	XPB3000	3022	3000	2940				
XPB1590	1612	1590	1530	XPB3080	3102	3080	3020				
XPB1600	1622	1600	1540	XPB3150	3172	3150	3090				
XPB1650	1672	1650	1590	XPB3170	3192	3170	3110				
XPB1690	1712	1690	1630	XPB3250	3272	3250	3190				
XPB1700	1722	1700	1640	XPB3340	3362	3340	3280				
XPB1800	1822	1800	1740	XPB3350	3372	3350	3290				
XPB1850	1872	1850	1790	XPB3550	3572	3550	3490				
XPB1900	1922	1900	1840	XPB3750	3772	3750	3690				
XPB1950	1972	1950	1890	XPB3800	3822	3800	3740				
XPB2000	2022	2000	1940	XPB4000	4022	4000	3940				
XPB2020	2042	2020	1960	XPB4060	4082	4060	4000				
XPB2120	2142	2120	2060	XPB4250	4272	4250	4190				

SPCX - SECTION

Part No	Outside Length (mm)	Pitch Length (mm)	Inside Length (mm)
XPC2000	2030	2000	1917
XPC2120	2150	2120	2037
XPC2240	2270	2240	2157
XPC2360	2390	2360	2277
XPC2500	2530	2500	2417
XPC2650	2680	2650	2567
XPC2800	2830	2800	2717
XPC3000	3030	3000	2917
XPC3150	3180	3150	3067
XPC3350	3380	3350	3267
XPC3550	3580	3550	3467
XPC3750	3780	3750	3667
XPC4000	4030	4000	3917
XPC4250	4280	4250	4167
XPC4500	4530	4500	4417
XPC4750	4780	4750	4667
XPC5000	5030	5000	4917



English



Español



Italiano



Deutsch



Français



Nederlands



Polskie

Engineering Data Taper Bore

39

Agujero cónico de los datos de ingeniería • Ingegneria dei dati Taper Bore
Technik Daten konische Bohrung • Alésage conique de données ingénierie
Pozostałe dane techniczne Taper Bore

V-Pulleys Taper Bore

41

Agujero cónico V-poleas • V-pulegge cono del foro • V-Riemenscheiben
konische Bohrung • Alésage conique V-poulies • V-riemschijven Taper droeg
V- pasowe otwór stożkowy

Engineering Data Pilot Bore

64

Piloto de datos de ingeniería del alesaje • Ingegneria dei dati foro pilota
Technische Daten Pilotbohrung • Pilote de données d'ingénierie d'alésage
Technische gegevens piloot boring • ęrednica Inżynieria danych Pilot


V-Pulleys Pilot Bore

66

Agujero piloto V-poleas • V-pulegge foro pilota • V-Riemenscheiben
Pilotbohrung • V-poulies alésage pilote • V-riemschijven piloot boring
ęrednica kota pasowe V- Pilot




ENGINEERING DATA V-PULLEYS TAPER BORE

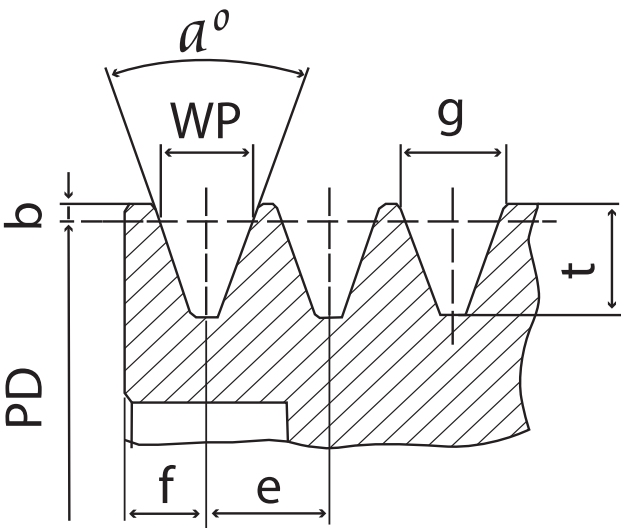


DIMENSIONS OF V-PULLEYS TAPER BORE

Groove Profile	WP	b	t	e	f	PD	Angle a° (mm)	g (mm)
SPZ	8.5	2.0	11.0	12±0.3	8.0±0.6	≤80	34±1	9.72
						>80	38±1	9.88
SPA	11.0	2.8	13.8	15±0.3	10.0±0.6	≤118	34±1	12.68
						>118	38±1	12.89
SPB	14.0	3.5	17.5	19±0.4	12.5±0.8	≤190	34±1	16.14
						>190	38±1	16.41
SPC	19.0	4.8	23.8	25.5±0.5	17.0±1	≤315	34±0.5	21.94
						>315	38±0.5	22.31


V-PULLEYS TYPES TAPER BORE




Type 1



Type 2




Type 3




Type 4


V-PULLEYS TYPES TAPER BORE continued




Type 5




Type 6

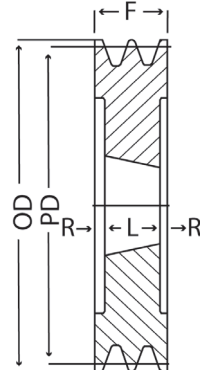


Type 7




Type 8

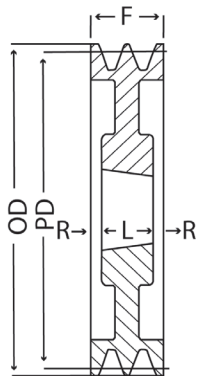


Type 9

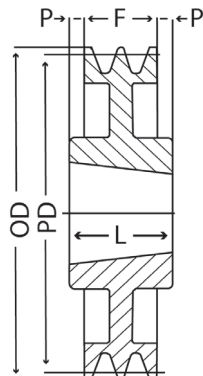


Type 10

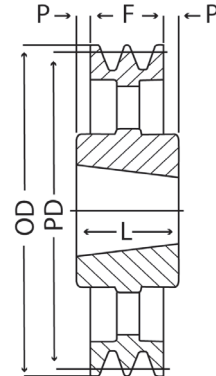


Type 11

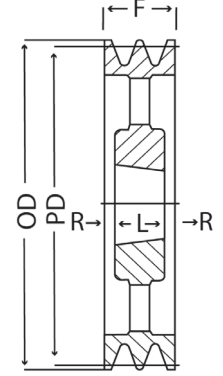


Type 12




Type 13




Type 15

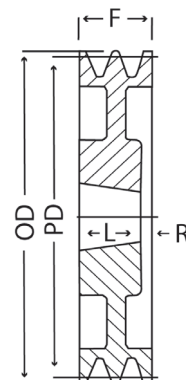


Type 15 - 1

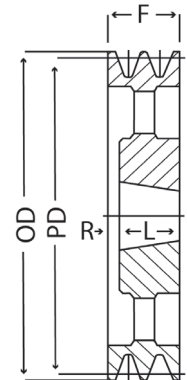


Type 16

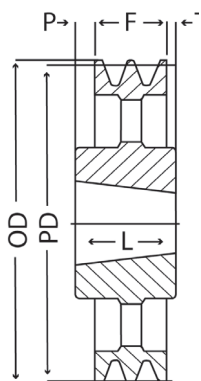

Type 17

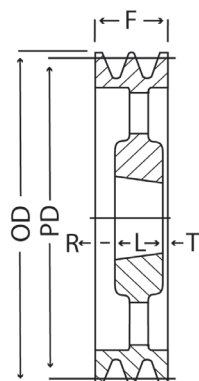

Type 18

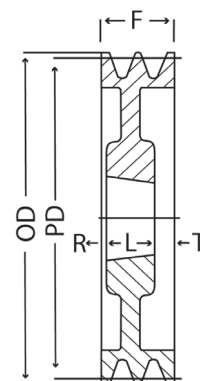

Type 19

**V PULLEYS****V-PULLEYS TAPER BORE****Description**

Dunlop V-pulleys are manufactured from cast iron EN-GJL-200 UNI EN1561 and are black phosphated according to ISO 4183 and DIN 2211-3 norms. All pulleys are statically balanced for peripheral speeds up to 35 m/sec.

V-Pulleys are available to suit all V & wedge belts cross sections Z, A, B, C, SPZ, SPA, SPB & SPC and are available from stock in both taper and pilot bore options.

Part numbers are identified by 3 letters (e.g. SPA) which represents the belt cross section, a 3 or 4 digit number (e.g. 250) the pulleys pitch diameter and a 1 or 2 digit number (e.g. 3) the number of grooves/belts to be run in the drive, for example SPA250/3.

SPZ - SECTION

Part No.	Type	Bush No.	PD (mm)	OD (mm)	Dimensions (mm)			
					F	L	R	P
SPZ 50 X 1	3	1008	50	54	38	24	14	-
SPZ 50 X 2	3	1008	50	54	50	24	26	-
SPZ 56 X 1	3	1008	56	60	37	24	13	-
SPZ 56 X 2	3	1008	56	60	49	24	25	-
SPZ 56 X 3	3	1108	56	60	61	23	38	-
SPZ 60 X 1	2	1008	60	64	22	22	-	-
SPZ 60 X 2	3	1108	60	64	49	22	27	-
SPZ 60 X 3	3	1108	60	64	61	23	38	-
SPZ 63 X 1	4	1108	63	67	16	22	-	-
SPZ 63 X 2	5	1108	63	67	28	22	6	-
SPZ 63 X 3	5	1108	63	67	40	22	18	-
SPZ 63 X 4	5	1108	63	67	52	22	30	-
SPZ 67 X 1	4	1108	67	71	16	22	-	-
SPZ 67 X 2	5	1108	67	71	28	22	6	-
SPZ 67 X 3	5	1108	67	71	40	22	18	-
SPZ 67 X 4	5	1108	67	71	52	22	30	-
SPZ 71 X 1	4	1108	71	75	16	22	-	-
SPZ 71 X 2	5	1108	71	75	28	22	6	-
SPZ 71 X 3	5	1108	71	75	40	22	18	-
SPZ 71 X 4	5	1108	71	75	52	22	30	-
SPZ 71 X 5	5	1108	71	75	64	22	42	-
SPZ 75 X 1	4	1108	75	79	16	22	-	-
SPZ 75 X 2	5	1210	75	79	28	25	3	-
SPZ 75 X 3	5	1210	75	79	40	25	15	-
SPZ 75 X 4	5	1210	75	79	52	25	27	-
SPZ 80 X 1	4	1210	80	84	16	25	-	-
SPZ 80 X 2	5	1210	80	84	28	25	3	-
SPZ 80 X 3	5	1210	80	84	40	25	15	-
SPZ 80 X 4	5	1210	80	84	42	25	27	-
SPZ 85 X 1	5	1610	85	89	28	25	3	-
SPZ 85 X 2	5	1610	85	89	40	25	15	-
SPZ 85 X 3	5	1610	85	89	52	25	27	-
SPZ 85 X 4	5	1610	85	89	64	25	39	-

SPZ - SECTION continued

Part No.	Type	Bush No.	PD (mm)	OD (mm)	Dimensions (mm)			
					F	L	R	P
SPZ 90 X 1	4	1210	90	94	16	25	-	-
SPZ 90 X 2	5	1610	90	94	28	25	3	-
SPZ 90 X 3	5	1610	90	94	40	25	15	-
SPZ 90 X 4	5	1610	90	94	52	25	27	-
SPZ 90 X 5	5	1610	90	94	64	25	39	-
SPZ 90 X 6	5	1610	90	94	76	25	51	-
SPZ 95 X 1	4	1210	95	99	16	25	-	-
SPZ 95 X 2	5	1610	95	99	28	25	3	-
SPZ 95 X 3	5	1610	95	99	40	25	15	-
SPZ 95 X 4	5	1610	95	99	52	25	27	-
SPZ 95 X 5	5	1610	95	99	64	25	39	-
SPZ 95 X 6	5	1610	95	99	76	25	51	-
SPZ 100 X 1	4	1210	100	104	16	5	-	-
SPZ 100 X 2	5	1610	100	104	28	25	3	-
SPZ 100 X 3	5	1610	100	104	40	25	15	-
SPZ 100 X 4	5	1610	100	104	52	25	27	-
SPZ 100 X 5	5	2012	100	104	64	32	32	-
SPZ 100 X 6	5	2012	100	104	76	32	44	-
SPZ 106 X 1	4	1610	106	110	16	25	-	-
SPZ 106 X 2	5	1610	106	110	28	25	3	-
SPZ 106 X 3	5	1610	106	110	40	25	15	-
SPZ 106 X 4	5	1610	106	110	52	25	27	-
SPZ 106 X 5	5	2012	106	110	64	32	32	-
SPZ 106 X 6	5	2012	106	110	76	32	44	-
SPZ 112 X 1	4	1610	112	116	16	25	-	-
SPZ 112 X 2	5	1610	112	116	28	25	3	-
SPZ 112 X 3	5	2012	112	116	40	32	8	-
SPZ 112 X 4	5	2012	112	116	52	32	20	-
SPZ 112 X 5	5	2012	112	116	64	32	32	-
SPZ 112 X 6	5	2012	112	116	76	32	44	-
SPZ 118 X 1	4	1610	118	122	16	25	-	-
SPZ 118 X 2	5	1610	118	122	28	25	3	-
SPZ 118 X 3	5	2012	118	122	40	32	8	-
SPZ 118 X 5	5	2012	118	122	64	32	32	-
SPZ 118 X 6	5	2517	118	122	76	45	31	-
SPZ 125 X 1	4	1610	125	129	16	25	-	-
SPZ 125 X 2	5	1610	125	129	28	25	3	-
SPZ 125 X 3	6	2012	125	129	40	32	8	-
SPZ 125 X 4	6	2012	125	129	52	32	20	-
SPZ 125 X 5	5	2012	125	129	64	32	32	-
SPZ 125 X 6	5	2517	125	129	76	45	31	-
SPZ 132 X 1	4	1610	132	136	16	25	-	-
SPZ 132 X 2	5	1610	132	136	28	25	3	-
SPZ 132 X 3	6	2012	132	136	40	32	8	-
SPZ 132 X 4	6	2012	132	136	52	32	20	-
SPZ 132 X 5	5	2517	132	136	64	45	19	-

SPZ - SECTION continued

Part No.	Type	Bush No.	PD (mm)	OD (mm)	Dimensions (mm)			
					F	L	R	P
SPZ 132 X 6	5	2517	132	136	76	45	31	-
SPZ 132 X 8	7	2517	132	136	100	45	27.5	-
SPZ 140 X 1	8	1610	140	144	16	25	-	9
SPZ 140 X 2	5	1610	140	144	28	25	3	-
SPZ 140 X 3	6	2012	140	144	40	32	8	-
SPZ 140 X 4	6	2012	140	144	52	32	20	-
SPZ 140 X 5	6	2517	140	144	64	45	19	-
SPZ 140 X 6	6	2517	140	144	76	45	31	-
SPZ 140 X 8	7	2517	140	144	100	45	27.5	-
SPZ 150 X 1	8	1610	150	154	16	25	-	9
SPZ 150 X 2	4	2012	150	154	28	32	-	
SPZ 150 X 3	6	2012	150	154	40	32	8	
SPZ 150 X 4	6	2517	150	154	52	45	7	
SPZ 150 X 5	6	2517	150	154	64	45	19	
SPZ 150 X 6	6	2517	150	154	76	45	31	
SPZ 150 X 8	7	2517	150	154	100	45	27.5	
SPZ 160 X 1	8	1610	160	164	16	25	-	9
SPZ 160 X 2	8	2012	160	164	28	32	-	4
SPZ 160 X 3	6	2012	160	164	40	32	8	-
SPZ 160 X 4	6	2517	160	164	52	45	7	-
SPZ 160 X 5	6	2517	160	164	64	45	19	-
SPZ 160 X 6	6	2517	160	164	76	45	31	-
SPZ 160 X 8	7	2517	160	164	100	45	27.5	-
SPZ 170 X 1	8	1610	170	174	16	25	-	9
SPZ 170 X 2	8	2012	170	174	28	32	-	4
SPZ 170 X 3	7	2012	170	174	40	32	4	-
SPZ 170 X 4	6	2517	170	174	52	45	7	-
SPZ 170 X 5	6	2517	170	174	64	45	19	-
SPZ 170 X 6	6	2517	170	174	76	45	31	-
SPZ 180 X 1	8	1610	180	184	16	25	-	9
SPZ 180 X 2	8	2012	180	184	28	32	-	4
SPZ 180 X 3	15	2012	180	184	40	32	8	-
SPZ 180 X 4	6	2517	180	184	52	45	7	-
SPZ 180 X 5	6	2517	180	184	64	45	19	-
SPZ 180 X 6	7	2517	180	184	76	45	15.5	-
SPZ 180 X 8	7	2517	180	184	100	45	27.5	-
SPZ 190 X 1	8	1610	190	194	16	25	-	9
SPZ 190 X 2	8	2012	190	194	28	32	-	4
SPZ 190 X 3	9	2012	190	194	40	32	4	-
SPZ 190 X 4	9	2517	190	194	52	45	3.5	-
SPZ 190 X 5	9	2517	190	194	64	45	9.5	-
SPZ 190 X 6	9	2517	190	194	76	45	15.5	-
SPZ 200 X 1	8	2012	200	204	16	32	-	16
SPZ 200 X 2	8	2012	200	204	28	32	-	4
SPZ 200 X 3	9	2012	200	204	40	32	4	-
SPZ 200 X 4	9	2517	200	204	52	45	3.5	-

SPZ - SECTION continued

Part No.	Type	Bush No.	PD (mm)	OD (mm)	Dimensions (mm)			
					F	L	R	P
SPZ 200 X 5	9	2517	200	204	52	45	3.5	-
SPZ 200 X 6	9	2517	200	204	76	45	15.5	-
SPZ 200 X 8	7	3020	200	204	100	51	24.5	-
SPZ 212 X 1	8	2012	212	216	16	32	-	16
SPZ 212 X 2	8	2012	212	216	28	32	-	4
SPZ 212 X 3	9	2012	212	216	40	32	4	-
SPZ 212 X 4	9	2517	212	216	52	45	3.5	-
SPZ 212 X 5	9	2517	212	216	64	45	9.5	-
SPZ 212 X 6	9	2517	212	216	76	45	15.5	-
SPZ 224 X 1	13	2012	224	228	16	32	-	16
SPZ 224 X 2	13	2012	224	228	28	32	-	4
SPZ 224 X 3	9	2012	224	228	40	32	4	-
SPZ 224 X 4	9	2517	224	228	52	45	3.5	-
SPZ 224 X 5	9	2517	224	228	64	45	9.5	-
SPZ 224 X 6	9	2517	224	228	76	45	15.5	-
SPZ 224 X 8	7	3020	224	228	100	51	24.5	-
SPZ 250 X 1	11	2012	250	254	16	32	-	8
SPZ 250 X 2	11	2012	250	254	28	32	-	2
SPZ 250 X 3	12	2012	250	254	40	32	4	-
SPZ 250 X 4	9	2517	250	254	52	45	3.5	-
SPZ 250 X 5	9	2517	250	254	64	45	9.5	-
SPZ 250 X 6	9	2517	250	254	76	45	15.5	-
SPZ 280 X 1	11	2012	280	284	16	32	-	8
SPZ 280 X 2	11	2012	280	284	28	32	-	2
SPZ 280 X 3	11	2517	280	284	40	45	-	2.5
SPZ 280 X 4	12	2517	280	284	52	45	3.5	-
SPZ 280 X 5	12	2517	280	284	64	45	9.5	-
SPZ 280 X 6	12	2517	280	284	76	45	15.5	-
SPZ 315 X 1	11	2012	315	319	16	32	-	8
SPZ 315 X 2	11	2012	315	319	28	32	-	2
SPZ 315 X 3	11	2517	315	319	40	45	-	2.5
SPZ 315 X 4	12	2517	315	319	52	45	3.5	-
SPZ 315 X 5	12	2517	315	319	64	45	9.5	-
SPZ 315 X 6	12	2517	315	319	76	45	15.5	-
SPZ 355 X 1	11	2012	355	359	16	32	-	8
SPZ 355 X 2	11	2012	355	359	28	32	-	2
SPZ 355 X 3	11	2517	355	359	40	45	-	2.5
SPZ 355 X 4	12	2517	355	359	52	45	3.5	-
SPZ 355 X 5	12	2517	355	359	64	45	9.5	-
SPZ 355 X 6	12	2517	355	359	76	45	15.5	-
SPZ 400 X 1	11	2012	400	404	16	32	-	8
SPZ 400 X 2	11	2517	400	404	28	45	-	8.5
SPZ 400 X 3	11	2517	400	404	40	45	-	2.5
SPZ 400 X 4	12	2517	400	404	52	45	3.5	-
SPZ 400 X 5	12	3020	400	404	64	51	6.5	-
SPZ 400 X 6	11	3030	400	404	76	76	-	0

SPZ - SECTION continued

Part No.	Type	Bush No	PD (mm)	OD (mm)	Dimensions (mm)			
					F	L	R	P
SPZ 400 X 6 - R	12	3020	400	404	76	51	12.5	-
SPZ 450 X 2	11	2517	450	454	28	-	-	8.5
SPZ 450 X 3	11	2517	450	454	40	-	-	2.5
SPZ 450 X 4	12	3020	450	454	52	-	0.5	-
SPZ 450 X 5	12	3020	450	454	64	-	6.5	-
SPZ 450 X 6	11	3030	450	454	76	-	-	-
SPZ 450 X 6 - R	12	3020	450	454	76	-	12.5	-
SPZ 500 X 2	11	2517	500	504	28	45	-	8.5
SPZ 500 X 3	11	2517	500	504	40	45	-	2.5
SPZ 500 X 4	12	3020	500	504	52	51	0.5	-
SPZ 500 X 5	11	3030	500	504	64	76	-	6
SPZ 500 X 5 - R	12	3020	500	504	64	51	6.5	-
SPZ 500 X 6	11	3030	500	504	76	76	-	0
SPZ 500 X 6 - R	12	3020	500	504	76	51	12.5	-
SPZ 500 X 8	12	3535	500	504	100	89	5.5	-
SPZ 560 X 3	13	2517	560	564	40	45	-	5
SPZ 560 X 4	12	3020	560	564	52	51	0.5	-
SPZ 560 X 5	11	3030	560	564	64	76	-	6
SPZ 630 X 2	11	3020	630	634	28	51	-	11.5
SPZ 630 X 3	11	3020	630	634	40	51	-	5.5
SPZ 630 X 4	11	3030	630	634	52	76	-	12
SPZ 630 X 4 - R	12	3020	630	634	52	51	0.5	-
SPZ 630 X 5	11	3030	630	634	64	76	-	6
SPZ 630 X 6	11	3535	630	634	76	89	-	6.5
SPZ 800 X 3	11	3020	800	804	40	51	-	5.5
SPZ 800 X 4	11	3030	800	804	52	76	-	12

SPA - SECTION

Part No.	Type	Bush No.	PD (mm)	OD (mm)	Dimensions (mm)			
					F	L	R	P
SPA 63 X 1	3	1008	63	68.6	40	22	-	-
SPA 63 X 2	5	1008	63	68.6	35	22	13	-
SPA 67 X 1	4	1108	67	72.6	20	22	-	-
SPA 67 X 2	5	1108	67	72.6	35	22	13	-
SPA 71 X 1	4	1108	71	76.6	20	22	-	-
SPA 71 X 2	5	1108	71	76.6	35	22	13	-
SPA 71 X 3	5	1108	71	76.6	50	22	28	-
SPA 75 X 1	4	1108	75	80.6	20	22	-	-
SPA 75 X 2	5	1108	75	80.6	35	22	13	-
SPA 75 X 3	5	1108	75	80.6	50	22	28	-
SPA 80 X 1	4	1210	80	85.6	20	25	-	-
SPA 80 X 2	5	1210	80	85.6	35	25	10	-
SPA 80 X 3	5	1210	80	85.6	50	25	25	-
SPA 80 X 4	5	1215	80	85.6	65	38	27	-
SPA 80 X 4 - R	5	1210	80	85.6	65	25	40	-

SPA - SECTION

Part No.	Type	Bush No.	PD (mm)	OD (mm)	Dimensions (mm)			
					F	L	R	P
SPA 85 X 1	4	1210	85	90.6	20	25	-	-
SPA 85 X 2	5	1210	85	90.6	35	25	10	-
SPA 85 X 3	5	1210	85	90.6	50	25	25	-
SPA 85 X 4	5	1215	85	90.6	65	38	27	-
SPA 85 X 4 - R	5	1210	85	90.6	65	25	40	-
SPA 90 X 1	4	1210	90	95.6	20	25	-	5
SPA 90 X 2	5	1610	90	95.6	35	25	10	-
SPA 90 X 3	5	1610	90	95.6	50	25	25	-
SPA 90 X 4	5	1615	90	95.6	65	38	27	-
SPA 90 X 4 - R	5	1610	90	95.6	65	25	40	-
SPA 90 X 5	5	1615	90	95.6	80	38	42	-
SPA 95 X 1	4	1210	95	100.6	20	25	-	-
SPA 95 X 2	5	1610	95	100.6	35	25	10	-
SPA 95 X 3	5	1610	95	100.6	50	25	25	-
SPA 95 X 4	5	1615	95	100.6	65	38	27	-
SPA 95 X 5	5	1615	95	100.6	80	38	42	-
SPA 100 X 1	4	1610	100	105.6	20	25	-	-
SPA 100 X 2	5	1610	100	105.6	35	25	10	-
SPA 100 X 3	6	1610	100	105.6	50	25	25	-
SPA 100 X 4	6	1615	100	105.6	65	38	27	-
SPA 100 X 5	6	1615	100	105.6	80	38	42	-
SPA 100 X 6	7	1610	100	105.6	95	25	35	-
SPA 106 X 1	4	1610	106	111.6	20	25	-	-
SPA 106 X 2	5	1610	106	111.6	35	25	10	-
SPA 106 X 3	6	1610	106	111.6	50	25	25	-
SPA 106 X 4	5	2012	106	111.6	65	32	33	-
SPA 106 X 5	5	2012	106	111.6	80	32	48	-
SPA 106 X 6	5	2012	106	111.6	95	32	63	-
SPA 112 X 1	4	1610	112	117.6	20	25	-	-
SPA 112 X 2	5	1610	112	117.6	35	25	10	-
SPA 112 X 3	5	2012	112	117.6	50	32	18	-
SPA 112 X 4	5	2012	112	117.6	65	32	33	-
SPA 112 X 5	5	2012	112	117.6	80	32	48	-
SPA 112 X 6	5	2012	112	117.6	95	32	63	-
SPA 118 X 1	4	1610	118	123.6	20	25	-	-
SPA 118 X 2	5	1610	118	123.6	35	25	10	-
SPA 118 X 3	6	2012	118	123.6	50	32	18	-
SPA 118 X 4	6	2012	118	123.6	65	32	33	-
SPA 118 X 5	6	2012	118	123.6	80	32	48	-
SPA 118 X 6	5	2012	118	123.6	95	32	63	-
SPA 125 X 1	4	1610	125	130.6	20	25	-	-
SPA 125 X 2	5	1610	125	130.6	35	25	10	-
SPA 125 X 3	6	2012	125	130.6	50	32	18	-
SPA 125 X 4	6	2012	125	130.6	65	32	33	-
SPA 125 X 5	7	2012	125	130.6	80	32	24	-
SPA 125 X 6	7	2012	125	130.6	95	32	31.5	-

SPA - SECTION continued

Part No.	Type	Bush No.	PD (mm)	OD (mm)	Dimensions (mm)			
					F	L	R	P
SPA 132 X 1	4	1610	132	137.6	20	25	-	-
SPA 132 X 2	5	2012	132	137.6	35	32	3	-
SPA 132 X 3	6	2012	132	137.6	50	32	18	-
SPA 132 X 4	6	2517	132	137.6	65	45	20	-
SPA 132 X 5	7	2517	132	137.6	80	45	17.5	-
SPA 132 X 6	7	2517	132	137.6	95	45	25	-
SPA 140 X 1	4	1610	140	145.6	20	25	-	-
SPA 140 X 2	5	2012	140	145.6	35	32	3	-
SPA 140 X 3	5	2517	140	145.6	50	45	5	-
SPA 140 X 4	6	2517	140	145.6	65	45	20	-
SPA 140 X 5	7	2517	140	145.6	80	45	17.5	-
SPA 140 X 6	7	2517	140	145.6	95	45	25	-
SPA 150 X 1	8	1610	150	155.6	20	25	-	5
SPA 150 X 2	5	2012	150	155.6	35	32	3	-
SPA 150 X 3	5	2517	150	155.6	50	45	5	-
SPA 150 X 4	6	2517	150	155.6	65	45	20	-
SPA 150 X 5	7	2517	150	155.6	80	45	17.5	-
SPA 150 X 6	7	2517	150	155.6	95	45	25	-
SPA 160 X 1	8	1610	160	165.6	20	25	-	5
SPA 160 X 2	5	2012	160	165.6	35	32	3	-
SPA 160 X 3	5	2517	160	165.6	50	45	5	-
SPA 160 X 4	6	2517	160	165.6	65	45	20	-
SPA 170 X 1	8	1610	170	175.6	20	25	-	5
SPA 170 X 2	15	2012	170	175.6	35	32	3	-
SPA 170 X 3	5	2517	170	175.6	50	45	5	-
SPA 170 X 4	6	2517	170	175.6	65	45	20	-
SPA 170 X 5	7	2517	170	175.6	80	45	17.5	-
SPA 170 X 6	7	2517	170	175.6	95	45	25	-
SPA 180 X 1	8	1610	180	185.6	20	25	-	5
SPA 180 X 2	9	2012	180	185.6	35	32	1.5	-
SPA 180 X 3	5	2517	180	185.6	50	45	5	-
SPA 180 X 4	6	2517	180	185.6	65	45	20	-
SPA 180 X 5	7	3020	180	185.6	80	51	14.5	-
SPA 180 X 6	7	3020	180	185.6	95	51	22	-
SPA 190 X 1	8	1610	190	195.6	20	25	-	5
SPA 190 X 2	15	2012	190	195.6	35	32	3	-
SPA 190 X 3	5	2517	190	195.6	50	45	5	-
SPA 190 X 4	6	2517	190	195.6	65	45	20	-
SPA 190 X 5	6	3020	190	195.6	80	51	29	-
SPA 190 X 6	7	3020	190	195.6	95	51	22	-
SPA 200 X 1	8	2012	200	205.6	20	32	-	12
SPA 200 X 2	10	2517	200	205.6	35	45	-	5
SPA 200 X 3	9	2517	200	205.6	50	45	2.5	-
SPA 200 X 4	6	3020	200	205.6	65	51	14	-
SPA 200 X 5	7	3020	200	205.6	80	51	14.5	-
SPA 200 X 6	7	3020	200	205.6	95	51	22	-

SPA - SECTION continued

Part No.	Type	Bush No.	PD (mm)	OD (mm)	Dimensions (mm)			
					F	L	R	P
SPA 212 X 1	8	2012	212	217.6	20	32	-	-
SPA 212 X 2	8	2517	212	217.6	35	45	-	-
SPA 212 X 3	9	2517	212	217.6	50	45	2.5	-
SPA 212 X 4	6	3020	212	217.6	65	51	14	-
SPA 212 X 5	6	3020	212	217.6	80	51	29	-
SPA 212 X 6	7	3020	212	217.6	95	51	22	-
SPA 224 X 1	13	2012	224	229.6	20	32	-	12
SPA 224 X 2	13	2517	224	229.6	35	45	-	10
SPA 224 X 3	12	2517	224	229.6	50	45	2.5	-
SPA 224 X 4	6	3020	224	229.6	65	51	14	-
SPA 224 X 5	6	3020	224	229.6	80	51	29	-
SPA 224 X 6	7	3020	224	229.6	95	51	22	-
SPA 236 X 1	13	2012	236	241.6	20	32	-	12
SPA 236 X 2	13	2517	236	241.6	35	45	-	10
SPA 236 X 3	12	2517	236	241.6	50	45	2.5	-
SPA 236 X 4	9	3020	236	241.6	65	51	7	-
SPA 236 X 5	9	3020	236	241.6	80	51	14.5	-
SPA 236 X 6	9	3020	236	241.6	95	51	22	-
SPA 250 X 1	11	2012	250	255.6	20	32	-	6
SPA 250 X 2	11	2517	250	255.6	35	45	-	5
SPA 250 X 3	12	2517	250	255.6	50	45	2.5	-
SPA 250 X 4	9	3020	250	255.6	65	51	7	-
SPA 250 X 5	9	3020	250	255.6	80	51	14.5	-
SPA 250 X 6	9	3020	250	255.6	95	51	22	-
SPA 280 X 1	13	2012	280	285.6	20	32	-	12
SPA 280 X 2	13	2517	280	285.6	35	45	-	10
SPA 280 X 3	12	2517	280	285.6	50	45	2.5	-
SPA 280 X 4	12	3020	280	285.6	65	51	7	-
SPA 280 X 5	10	3535	280	285.6	80	89	-	4.5
SPA 280 X 5 - R	9	3525	280	285.6	80	65	7.5	-
SPA 280 X 6	9	3535	280	285.6	95	89	3	-
SPA 280 X 6 - R	9	3525	280	285.6	95	65	15	-
SPA 300 X 1	13	2012	300	305.6	20	32	-	12
SPA 300 X 2	13	2517	300	305.6	35	45	-	10
SPA 300 X 3	13	3020	300	305.6	50	51	-	1
SPA 300 X 4	12	3020	300	305.6	65	51	7	-
SPA 300 X 5	8	3535	300	305.6	80	89	-	9
SPA 300 X 5 - R	9	3525	300	305.6	80	65	7.5	-
SPA 300 X 6	9	3535	300	305.6	95	89	3	-
SPA 300 X 6 - R	9	3525	300	305.6	95	65	15	-
SPA 315 X 1	13	2012	315	320.6	20	32	-	12
SPA 315 X 2	13	2517	315	320.6	35	45	-	10
SPA 315 X 3	11	3020	315	320.6	50	51	-	0.5
SPA 315 X 4	12	3020	315	320.6	65	51	7	-
SPA 315 X 5	10	3535	315	320.6	80	89	-	4.5

SPA - SECTION continued

Part No.	Type	Bush No.	PD (mm)	OD (mm)	Dimensions (mm)			
					F	L	R	P
SPA 315 X 5 - R	9	3525	315	320.6	80	65	7.5	-
SPA 315 X 6	9	3535	315	320.6	95	89	3	
SPA 315 X 6 - R	9	3525	315	320.6	95	65	15	-
SPA 355 X 1	13	2012	355	360.6	20	32	-	12
SPA 355 X 2	13	2517	355	360.6	35	45	-	10
SPA 355 X 3	11	3020	355	360.6	50	51	-	0.5
SPA 355 X 4	12	3020	355	360.6	65	51	7	-
SPA 355 X 5	11	3535	355	360.6	80	89	-	4.5
SPA 355 X 5 - R	12	3525	355	360.6	80	65	7.5	-
SPA 355 X 6	12	3535	355	360.6	95	89	3	-
SPA 355 X 6 - R	12	3525	355	360.6	95	65	15	-
SPA 400 X 1	13	2012	400	405.6	20	32	-	12
SPA 400 X 2	13	2517	400	405.6	35	45	-	10
SPA 400 X 3	13	3020	400	405.6	50	51	-	1
SPA 400 X 4	12	3020	400	405.6	65	51	7	-
SPA 400 X 5	11	3535	400	405.6	80	89	-	4.5
SPA 400 X 5 - R	12	3525	400	405.6	80	65	7.5	-
SPA 400 X 6	12	3535	400	405.6	95	89	3	-
SPA 400 X 6 - R	12	3525	400	405.6	95	65	15	-
SPA 450 X 1	13	2012	450	455.6	20	32	-	12
SPA 450 X 2	13	2517	450	455.6	35	45	-	10
SPA 450 X 3	13	3020	450	455.6	50	51	-	1
SPA 450 X 4	12	3020	450	455.6	65	51	7	-
SPA 450 X 5	11	3535	450	455.6	80	89	-	4.5
SPA 450 X 5 - R	12	3525	450	455.6	80	65	7.5	-
SPA 450 X 6	12	3535	450	455.6	95	89	3	-
SPA 450 X 6 - R	12	3525	450	455.6	95	65	15	-
SPA 500 X 1	13	2517	500	505.6	20	45	-	25
SPA 500 X 2	13	2517	500	505.6	35	45	-	10
SPA 500 X 3	13	3020	500	505.6	50	51	-	1
SPA 500 X 4	12	3020	500	505.6	65	51	7	-
SPA 500 X 5	11	3535	500	505.6	80	89	-	4.5
SPA 500 X 5 - R	12	3525	500	505.6	80	65	7.5	-
SPA 500 X 6	12	3535	500	505.6	95	89	3	-
SPA 500 X 6 - R	12	3525	500	505.6	95	65	15	-
SPA 560 X 2	13	3020	560	565.6	35	51	-	16
SPA 560 X 3	13	3020	560	565.6	50	51	-	1
SPA 560 X 4	11	3535	560	565.6	65	89	-	12
SPA 560 X 4 - R	12	3525	560	565.6	65	65	0	-
SPA 560 X 5	11	3535	560	565.6	80	89	-	4.5
SPA 560 X 6	12	3535	560	565.6	95	89	3	-
SPA 630 X 1	11	2517	630	635.6	20	45	-	12.5
SPA 630 X 2	11	3020	630	635.6	35	51	-	8
SPA 630 X 3	13	3020	630	635.6	50	51	-	1
SPA 630 X 4	11	3535	630	635.6	65	89	-	12

SPA - SECTION continued

Part No.	Type	Bush No.	PD (mm)	OD (mm)	Dimensions (mm)			
					F	L	R	P
SPA 630 X 4 - R	12	3525	630	635.6	65	65	0	-
SPA 630 X 5	11	3535	630	635.6	80	89	-	4.5
SPA 630 X 5 - R	12	3525	630	635.6	80	65	7.5	-
SPA 630 X 6	11	4040	630	635.6	95	102	-	3.5
SPA 630 X 6 - R	12	4030	630	635.6	95	76	9.5	-
SPA 800 X 2	11	3535	800	805.6	35	89	-	27
SPA 800 X 3	11	3535	800	805.6	50	89	-	19.5
SPA 800 X 3 - R	11	3525	800	805.6	50	65	-	7.5
SPA 800 X 4	11	3535	800	805.6	65	89	-	12
SPA 800 X 4 - R	12	3525	800	805.6	65	65	0	-
SPA 800 X 5	11	4040	800	805.6	80	102	-	11
SPA 800 X 5 - R	12	4030	800	805.6	80	76	2	-
SPA 800 X 6	11	4040	800	805.6	95	102	-	3.5
SPA 800 X 6 - R	12	4030	800	805.6	95	76	9.5	-

SPB - SECTION

Part No.	Type	Bush No.	PD (mm)	OD (mm)	Dimensions (mm)			
					F	L	R	P
SPB 80 X 1	5	1108	80	87	25	22	3	-
SPB 80 X 2	5	1108	80	87	44	22	22	-
SPB 85 X 1	5	1108	85	92	25	22	3	-
SPB 85 X 2	5	1108	85	92	44	22	22	-
SPB 90 X 1	1	1210	90	97	25	25	-	-
SPB 90 X 2	5	1108	90	97	44	22	22	-
SPB 90 X 3	5	1210	90	97	63	25	38	-
SPB 95 X 1	1	1210	95	102	25	25	-	-
SPB 95 X 2	5	1210	95	102	44	25	19	-
SPB 95 X 3	5	1210	95	102	63	25	38	-
SPB 100 X 1	1	1610	100	107	25	25	-	-
SPB 100 X 2	5	1610	100	107	44	25	19	-
SPB 100 X 3	5	1610	100	107	63	25	38	-
SPB 100 X 4	5	1615	100	107	82	38	44	-
SPB 106 X 1	1	1610	106	113	25	25	-	-
SPB 106 X 2	5	1610	106	113	44	25	19	-
SPB 106 X 3	5	1610	106	113	63	25	38	-
SPB 106 X 4	5	1615	106	113	82	38	44	-
SPB 112 X 1	1	1610	112	119	25	25	-	-
SPB 112 X 2	5	1610	112	119	44	25	19	-
SPB 112 X 3	5	1610	112	119				-
SPB 112 X 4	5	2012	112	119	82	32	50	-
SPB 118 X 1	1	1610	118	125	25	25	-	-
SPB 118 X 2	6	1610	118	125	44	25	19	-
SPB 118 X 3	6	1610	118	125	63	25	38	-
SPB 118 X 4	5	2012	118	125	82	32	50	-

SPB - SECTION

Part No.	Type	Bush No.	PD (mm)	OD (mm)	Dimensions (mm)			
					F	L	R	P
SPB 125 X 1	1	1610	125	132	25	25	-	-
SPB 125 X 2	6	2012	125	132	44	32	12	-
SPB 125 X 3	6	2012	125	132	63	32	31	-
SPB 125 X 4	7	2012	125	132	82	32	25	-
SPB 125 X 5	5	2012	125	132	101	32	69	-
SPB 132 X 1	1	1610	132	139	25	25	-	-
SPB 132 X 2	6	2012	132	139	44	32	12	-
SPB 132 X 3	6	2012	132	139	63	32	31	-
SPB 132 X 4	7	2012	132	139	82	32	25	-
SPB 132 X 5	5	2517	132	139	101	45	56	-
SPB 132 X 6	7	2012	132	139	120	32	44	-
SPB 140 X 1	1	1610	140	147	25	25	-	-
SPB 140 X 2	6	2012	140	147	44	32	12	-
SPB 140 X 3	6	2012	140	147	63	32	31	-
SPB 140 X 4	7	2517	140	147	82	45	18.5	-
SPB 140 X 5	7	2517	140	147	101	45	28	-
SPB 140 X 6	7	2517	140	147	120	45	37.5	-
SPB 140 X 8	7	2517	140	147	158	45	56.5	-
SPB 150 X 1	10	1610	150	157	25	25	-	0
SPB 150 X 2	6	2012	150	157	44	32	12	-
SPB 150 X 3	6	2517	150	157	63	45	18	-
SPB 150 X 4	7	2517	150	157	82	45	18.5	-
SPB 150 X 5	7	2517	150	157	101	45	28	-
SPB 150 X 6	7	2517	150	157	120	45	37.5	-
SPB 160 X 1	10	1610	160	167	25	25	-	0
SPB 160 X 2	6	2012	160	167	44	32	12	-
SPB 160 X 3	6	2517	160	167	63	45	18	-
SPB 160 X 4	7	2517	160	167	82	45	18.5	-
SPB 160 X 5	7	2517	160	167	101	45	28	-
SPB 160 X 6	7	3020	160	167	120	51	34.5	-
SPB 160 X 8	7	3020	160	167	158	51	53.5	-
SPB 170 X 1	10	1610	170	177	25	25	-	0
SPB 170 X 2	6	2012	170	177	44	32	12	-
SPB 170 X 3	6	2517	170	177	63	45	18	-
SPB 170 X 4	7	2517	170	177	82	45	18.5	-
SPB 170 X 5	7	3020	170	177	101	51	25	-
SPB 170 X 6	7	3020	170	177	120	51	34.5	-
SPB 170 X 8	7	3030	170	177	158	76	41	-
SPB 170 X 8 - R	7	3020	170	177	158	51	53.5	-
SPB 180 X 1	10	1610	180	187	25	25	-	0
SPB 180 X 2	4	2517	180	187	44	45	-	-
SPB 180 X 3	6	2517	180	187	63	45	18	-
SPB 180 X 4	7	2517	180	187	82	45	18.5	-
SPB 180 X 5	7	3020	180	187	101	51	25	-
SPB 180 X 6	7	3020	180	187	120	51	34.5	-

SPB - SECTION continued

Part No.	Type	Bush No.	PD (mm)	OD (mm)	Dimensions (mm)			
					F	L	R	P
SPB 180 X 8	7	3030	180	187	158	76	41	-
SPB 180 X 8 - R	7	3020	180	187	158	51	53.5	-
SPB 190 X 1	10	2012	190	197	25	32	-	3.5
SPB 190 X 2	4	2517	190	197	44	45	-	-
SPB 190 X 3	6	2517	190	197	63	45	18	-
SPB 190 X 4	7	2517	190	197	82	45	18.5	-
SPB 190 X 5	7	3020	190	197	101	51	25	-
SPB 190 X 6	7	3020	190	197	120	51	34.5	-
SPB 190 X 8	7	3030	190	197	158	76	41	-
SPB 190 X 8 - R	7	3020	190	197	158	51	53.5	-
SPB 190 X 10	7	3535	190	197	196	89	53.5	-
SPB 200 X 1	10	2012	200	207	25	32	-	3.5
SPB 200 X 2	8	2517	200	207	44	45	-	1
SPB 200 X 3	6	2517	200	207	63	45	18	-
SPB 200 X 4	7	3020	200	207	82	51	15.5	-
SPB 200 X 5	7	3020	200	207	101	51	25	-
SPB 200 X 6	7	3020	200	207	120	51	34.5	-
SPB 200 X 8	7	3535	200	207	158	89	34.5	-
SPB 200 X 8 - R	7	3525	200	207	158	65	46.5	-
SPB 212 X 1	10	2012	212	219	25	32	-	3.5
SPB 212 X 2	8	2517	212	219	44	45	-	1
SPB 212 X 3	15	2517	212	219	63	45	18	-
SPB 212 X 4	7	3020	212	219	82	51	15.5	-
SPB 212 X 5	7	3020	212	219	101	51	25	-
SPB 212 X 6	7	3525	212	219	120	89	15.5	-
SPB 212 X 6 - R	7	3525	212	219	120	65	27.5	-
SPB 212 X 8	7	3525	212	219	158	89	34.5	-
SPB 212 X 8 - R	7	3525	212	219	158	65	46.5	-
SPB 212 X 10	7	3535	212	219	196	89	53.5	-
SPB 212 X 12	7	3535	212	219	234	89	72.5	-
SPB 224 X 1	10	2012	224	231	25	32	-	3.5
SPB 224 X 2	8	2517	224	231	44	45	-	1
SPB 224 X 3	15	2517	224	231	63	45	18	-
SPB 224 X 4	7	3020	224	231	82	51	15.5	-
SPB 224 X 5	7	3020	224	231	101	51	25	-
SPB 224 X 6	7	3535	224	231	120	89	15.5	-
SPB 224 X 6 - R	7	3525	224	231	120	65	27.5	-
SPB 224 X 8	7	3535	224	231	158	89	34.5	-
SPB 224 X 8 - R	7	3525	224	231	158	65	46.5	-
SPB 224 X 10	7	3535	224	231	196	89	53.5	-
SPB 236 X 1	10	2012	236	243	25	32	-	3.5
SPB 236 X 2	8	2517	236	243	44	45	-	1
SPB 236 X 3	15	2517	236	243	63	45	18	-
SPB 236 X 4	9	3020	236	243	82	51	15.5	-
SPB 236 X 5	7	3535	236	243	101	89	6	-

SPB - SECTION continued

Part No.	Type	Bush No.	PD (mm)	OD (mm)	Dimensions (mm)			
					F	L	R	P
SPB 236 X 5 - R	7	3525	236	243	101	65	18	-
SPB 236 X 6	7	3535	236	243	120	89	15.5	-
SPB 236 X 6 - R	7	3525	236	243	120	65	27.5	-
SPB 236 X 8	7	3535	236	243	158	89	34.5	-
SPB 236 X 8 - R	7	3525	236	243	158	65	46.5	-
SPB 236 X 10	7	3535	236	243	196	89	53.5	-
SPB 250 X 1	10	2012	250	257	25	32	-	3.5
SPB 250 X 2	8	2517	250	257	44	45	-	1
SPB 250 X 3	15	3020	250	257	63	51	12	-
SPB 250 X 4	9	3020	250	257	82	51	15.5	-
SPB 250 X 5	7	3535	250	257	101	89	6	-
SPB 250 X 5 - R	7	3525	250	257	101	65	18	-
SPB 250 X 6	7	3535	250	257	120	89	15.5	-
SPB 250 X 6 - R	7	3525	250	257	120	65	27.5	-
SPB 250 X 8	7	3535	250	257	158	89	34.5	-
SPB 250 X 8 - R	7	3525	250	257	158	65	46.5	-
SPB 250 X 10	7	3535	250	257	196	89	53.5	-
SPB 250 X 10 - R	7	3525	250	257	196	65	65.5	-
SPB 265 X 1	13	2012	265	272	25	32	-	7
SPB 265 X 2	13	2517	265	272	44	45	-	1
SPB 265 X 3	9	3020	265	272	63	51	6	-
SPB 265 X 4	9	3020	265	272	82	51	15.5	-
SPB 265 X 5	7	3535	265	272	101	89	6	-
SPB 265 X 6	7	3535	265	272	120	89	15.5	-
SPB 265 X 6 - R	7	3525	265	272	120	65	27.5	-
SPB 265 X 8	7	3535	265	272	158	89	34.5	-
SPB 265 X 8 - R	7	3525	265	272	158	65	46.5	-
SPB 280 X 1	11	2012	280	287	25	32	-	3.5
SPB 280 X 2	13	2517	280	287	44	45	-	1
SPB 280 X 3	12	3020	280	287	63	51	6	-
SPB 280 X 4	9	3020	280	287	82	51	15.5	-
SPB 280 X 5	9	3535	280	287	101	89	6	-
SPB 280 X 5 - R	9	3525	280	287	101	65	18	-
SPB 280 X 6	9	3535	280	287	120	89	15.5	-
SPB 280 X 6 - R	9	3525	280	287	120	65	27.5	-
SPB 280 X 8	9	3535	280	287	158	89	34.5	-
SPB 280 X 8 - R	9	3525	280	287	158	65	46.5	-
SPB 280 X 10	9	3535	280	287	196	89	53.5	-
SPB 280 X 10 - R	9	3525	280	287	196	65	65.5	-
SPB 300 X 1	13	2012	300	307	25	32	-	7
SPB 300 X 2	13	2517	300	307	44	45	-	1
SPB 300 X 3	12	3020	300	307	63	51	6	-
SPB 300 X 4	8	3535	300	307	82	89	-	7
SPB 300 X 4 - R	9	3525	300	307	82	65	8.5	-
SPB 300 X 5	9	3535	300	307	101	89	6	-

SPB - SECTION continued

Part No.	Type	Bush No.	PD (mm)	OD (mm)	Dimensions (mm)			
					F	L	R	P
SPB 300 X 5 - R	9	3525	300	307	101	65	18	-
SPB 300 X 6	9	3535	300	307	120	89	15.5	-
SPB 300 X 6 - R	9	3525	300	307	120	65	27.5	-
SPB 300 X 8	9	3535	300	307	158	89	34.5	-
SPB 300 X 8 - R	9	3525	300	307	158	65	46.5	-
SPB 300 X 10	9	3535	300	307	196	89	53.5	-
SPB 315 X 1	11	2012	315	322	25	32	-	3.5
SPB 315 X 2	13	2517	315	322	44	45	-	1
SPB 315 X 3	12	3020	315	322	63	51	6	-
SPB 315 X 4	11	3535	315	322	82	89	-	3.5
SPB 315 X 4 - R	12	3525	315	322	82	65	8.5	-
SPB 315 X 5	9	3535	315	322	101	89	6	-
SPB 315 X 5 - R	9	3525	315	322	101	65	18	-
SPB 315 X 6	9	3535	315	322	120	89	15.5	-
SPB 315 X 6 - R	9	3525	315	322	120	65	27.5	-
SPB 315 X 8	9	3535	315	322	158	89	34.5	-
SPB 315 X 8 - R	9	3525	315	322	158	65	46.5	-
SPB 315 X 10	9	3535	315	322	196	89	53.5	-
SPB 335 X 1	11	2517	335	342	25	45	-	10
SPB 335 X 2	13	2517	335	342	44	45	-	1
SPB 335 X 3	12	3020	335	342	63	51	6	-
SPB 335 X 4	11	3535	335	342	82	89	-	3.5
SPB 335 X 4 - R	12	3525	335	342	82	65	8.5	-
SPB 335 X 5	9	3535	335	342	101	89	6	-
SPB 335 X 5 - R	9	3525	335	342	101	65	18	-
SPB 335 X 6	9	3535	335	342	120	89	15.5	-
SPB 335 X 6 - R	9	3525	335	342	120	65	27.5	-
SPB 335 X 8	9	3535	335	342	158	89	34.5	-
SPB 335 X 8 - R	9	3525	335	342	158	65	46.5	-
SPB 335 X 10	9	3535	335	342	196	89	53.5	-
SPB 355 X 2	11	3020	355	362	44	51	-	3.5
SPB 355 X 3	12	3020	355	362	63	51	6	-
SPB 355 X 4	11	3535	355	362	82	89	-	3.5
SPB 355 X 5	9	3535	355	362	101	89	6	-
SPB 355 X 5 - R	9	3525	355	362	101	65	18	-
SPB 355 X 6	9	3535	355	362	120	89	15.5	-
SPB 355 X 6 - R	9	3525	355	362	120	65	27.5	-
SPB 355 X 8	9	3535	355	362	158	89	34.5	-
SPB 355 X 8 - R	9	3525	355	362	158	65	46.5	-
SPB 355 X 10	9	4040	355	362	196	102	47	-
SPB 400 X 1	11	2517	400	407	25	45	-	10
SPB 400 X 2	11	3020	400	407	44	51	-	3.5
SPB 400 X 3	11	3535	400	407	63	89	-	13
SPB 400 X 4	11	3535	400	407	82	89	-	3.5
SPB 400 X 5	12	3535	400	407	101	89	6	-

SPB - SECTION continued

Part No.	Type	Bush No.	PD (mm)	OD (mm)	Dimensions (mm)			
					F	L	R	P
SPB 400 X 5 - R	12	3525	400	407	101	65	18	-
SPB 400 X 6	12	3535	400	407	120	89	15.5	-
SPB 400 X 6 - R	12	3525	400	407	120	65	27.5	-
SPB 400 X 8	9	4040	400	407	158	102	28	-
SPB 400 X 8 - R	9	3525	400	407	158	65	46.5	-
SPB 400 X 10	9	4040	400	407	196	102	47	-
SPB 450 X 2	11	3020	450	457	44	51	-	3.5
SPB 450 X 3	13	3535	450	457	63	89	-	26
SPB 450 X 3 - R	13	3525	450	457	63	65	-	2
SPB 450 X 4	13	3535	450	457	82	89	-	7
SPB 450 X 4 - R	16	3525	450	457	82	65	17	-
SPB 450 X 5	16	3535	450	457	101	89	12	-
SPB 450 X 5 - R	16	3525	450	457	101	65	36	-
SPB 450 X 6	16	4040	450	457	120	102	18	-
SPB 450 X 6 - R	16	3525	450	457	120	65	55	-
SPB 450 X 8	12	4040	450	457	158	102	28	-
SPB 450 X 8 - R	12	3525	450	457	158	65	46.5	-
SPB 450 X 10	12	4545	450	457	196	114	41	-
SPB 500 X 2	11	3020	500	507	44	51	-	3.5
SPB 500 X 3	13	3535	500	507	63	89	-	26
SPB 500 X 3 - R	13	3525	500	507	63	65	-	2
SPB 500 X 4	13	3535	500	507	82	89	-	7
SPB 500 X 4 - R	16	3525	500	507	82	65	17	-
SPB 500 X 5	16	3535	500	507	101	89	12	-
SPB 500 X 5 - R	16	3525	500	507	101	65	36	-
SPB 500 X 6	16	4040	500	507	120	102	18	-
SPB 500 X 6 - R	16	3525	500	507	120	65	55	-
SPB 500 X 8	12	4040	500	507	158	102	28	-
SPB 500 X 8 - R	12	3525	500	507	158	65	46.5	-
SPB 500 X 10	12	4545	500	507	196	114	41	-
SPB 560 X 2	17	3030	560	567	44	76	-	28.5
SPB 560 X 2 - R	11	3020	560	567	44	51	-	3.5
SPB 560 X 3	13	3535	560	567	63	89	-	26
SPB 560 X 3 - R	13	3525	560	567	63	65	-	2
SPB 560 X 4	13	3535	560	567	82	89	-	7
SPB 560 X 4 - R	16	3525	560	567	82	65	17	-
SPB 560 X 5	13	4040	560	567	101	102	-	1
SPB 560 X 5 - R	16	3525	560	567	101	65	36	-
SPB 560 X 6	16	4040	560	567	120	102	18	-
SPB 560 X 6 - R	16	3525	560	567	120	65	55	-
SPB 560 X 8	12	4545	560	567	158	114	22	-
SPB 560 X 8 - R	12	4030	560	567	158	76	41	-
SPB 560 X 10	12	4545	560	567	196	114	41	-
SPB 630 X 2	11	3030	630	637	44	76	-	16
SPB 630 X 2 - R	11	3020	630	637	44	51	-	3.5

SPB - SECTION continued

Part No.	Type	Bush No.	PD (mm)	OD (mm)	Dimensions (mm)			
					F	L	R	P
SPB 630 X 3	13	3535	630	637	63	89	-	26
SPB 630 X 3 - R	13	3525	630	637	63	65	-	2
SPB 630 X 4	13	3535	630	637	82	89	-	7
SPB 630 X 4 - R	16	3525	630	637	82	65	17	-
SPB 630 X 5	13	4040	630	637	101	102	-	1
SPB 630 X 5 - R	16	3525	630	637	101	65	36	-
SPB 630 X 6	16	4040	630	637	101	65	18	-
SPB 630 X 6 - R	16	3525	630	637	120	102	55	-
SPB 630 X 8	12	4545	630	637	158	114	22	-
SPB 630 X 8 - R	12	4030	630	637	158	76	41	-
SPB 630 X 10	12	4545	630	637	196	114	41	-
SPB 710 X 2	11	3030	710	717	44	76	-	16
SPB 710 X 3	11	3535	710	717	63	89	-	13
SPB 710 X 3 - R	11	3525	710	717	63	65	-	1
SPB 710 X 4	11	3535	710	717	82	89	-	3.5
SPB 710 X 4 - R	12	3525	710	717	82	65	8.5	-
SPB 710 X 5	13	4040	710	717	101	102	-	1
SPB 710 X 5 - R	12	4030	710	717	101	76	12.5	-
SPB 710 X 6	12	4040	710	717	120	102	9	-
SPB 710 X 6 - R	12	4535	710	717	120	89	15.5	-
SPB 710 X 8	12	4545	710	717	158	114	22	-
SPB 710 X 8 - R	12	4535	710	717	158	89	34.5	-
SPB 710 X 10	12	4545	710	717	196	114	41	-
SPB 800 X 3	11	3535	800	807	63	89	-	13
SPB 800 X 3 - R	11	3525	800	807	63	65	-	1
SPB 800 X 4	11	4040	800	807	82	102	-	10
SPB 800 X 4 - R	12	4030	800	807	82	76	3	-
SPB 800 X 5	13	4040	800	807	101	102	-	1
SPB 800 X 5 - R	12	4030	800	807	101	76	12.5	-
SPB 800 X 6	12	4545	800	807	120	114	3	-
SPB 800 X 6 - R	12	4535	800	807	120	89	15.5	-
SPB 800 X 8	12	4545	800	807	158	114	22	-
SPB 800 X 8 - R	12	4535	800	807	158	89	34.5	-
SPB 800 X 10	12	4545	800	807	196	114	41	-
SPB 1000 X 3	11	4040	1000	1007	63	102	-	19.5
SPB 1000 X 3 - R	11	4030	1000	1007	63	76	-	6.5
SPB 1000 X 4	11	4040	1000	1007	82	102	-	10
SPB 1000 X 4 - R	12	4030	1000	1007	82	76	3	-
SPB 1000 X 5	11	4545	1000	1007	101	114	-	6.5
SPB 1000 X 5 - R	12	4535	1000	1007	101	89	6	-
SPB 1000 X 6	12	4545	1000	1007	120	114	3	-
SPB 1000 X 6 - R	12	4535	1000	1007	120	89	15.5	-
SPB 1000 X 8	12	5050	1000	1007	158	127	15.5	-
SPB 1000 X 8 - R	12	4535	1000	1007	158	89	34.5	-
SPB 1000 X 10	12	5050	1000	1007	196	127	34.5	-

SPB - SECTION continued

Part No.	Type	Bush No.	PD (mm)	OD (mm)	Dimensions (mm)			
					F	L	R	P
SPB 1250 X 3	11	4545	1250	1257	63	114	-	25.5
SPB 1250 X 3 - R	11	4535	1250	1257	63	89	-	13
SPB 1250 X 4	11	4545	1250	1257	82	114	-	16
SPB 1250 X 4 - R	11	4535	1250	1257	82	89	-	3.5
SPB 1250 X 5	11	4545	1250	1257	101	114	-	6.5
SPB 1250 X 5 - R	12	4535	1250	1257	101	89	6	-
SPB 1250 X 6	12	4545	1250	1257	120	114	3	-
SPB 1250 X 6 - R	12	4535	1250	1257	120	89	15.5	-
SPB 1250 X 8	12	5050	1250	1257	158	127	15.5	-
SPB 1250 X 8 - R	12	5040	1250	1257	158	114	22	-
SPB 1250 X 12	12	5050	1250	1257	234	127	53.5	-

SPC - SECTION

Part No.	Type	Bush No.	PD (mm)	OD (mm)	Dimensions (mm)			
					F	L	R	P
SPC 200 X 2	7	2517	200	209.6	59.5	45	7.3	-
SPC 200 X 3	7	2517	200	209.6	85	45	20	-
SPC 200 X 4	7	3020	200	209.6	110.5	51	29.8	-
SPC 200 X 5	7	3535	200	209.6	136	89	23.5	-
SPC 200 X 5 - R	7	3525	200	209.6	136	65	35.5	-
SPC 200 X 6	7	3535	200	209.6	161.5	89	36.3	-
SPC 200 X 6 - R	7	3525	200	209.6	161.5	65	48.3	-
SPC 200 X 8	7	3535	200	209.6	212.5	89	61.8	-
SPC 200 X 8 - R	7	3525	200	209.6	212.5	65	73.8	-
SPC 212 X 2	9	2517	212	221.6	59.5	45	7.3	-
SPC 212 X 3	7	3020	212	221.6	85	51	17	-
SPC 212 X 4	7	3020	212	221.6	110.5	51	29.8	-
SPC 212 X 5	7	3535	212	221.6	136	89	23.5	-
SPC 212 X 5 - R	7	3525	212	221.6	136	65	35.5	-
SPC 212 X 6	7	3535	212	221.6	161.5	89	36.3	-
SPC 212 X 6 - R	7	3525	212	221.6	161.5	65	48.3	-
SPC 212 X 8	7	3535	212	221.6	212.5	89	61.8	-
SPC 212 X 8 - R	7	3525	212	221.6	212.5	65	73.8	-
SPC 212 X 10	7	3535	212	221.6	263.5	89	87.3	-
SPC 224 X 2	7	3020	224	233.6	59.5	51	4.3	-
SPC 224 X 3	7	3020	224	233.6	85	51	17	-
SPC 224 X 4	7	3535	224	233.6	110.5	89	10.8	-
SPC 224 X 4 - R	7	3525	224	233.6	110.5	65	22.8	-
SPC 224 X 5	7	3535	224	233.6	136	89	23.5	-
SPC 224 X 5 - R	7	3525	224	233.6	136	65	35.5	-
SPC 224 X 6	7	3535	224	233.6	161.5	89	36.3	-
SPC 224 X 6 - R	7	3525	224	233.6	161.5	65	48.3	-
SPC 224 X 8	7	3535	224	233.6	212.5	89	61.8	-
SPC 224 X 8 - R	7	3525	224	233.6	212.5	65	73.8	-

SPC - SECTION continued

Part No.	Type	Bush No.	PD (mm)	OD (mm)	Dimensions (mm)			
					F	L	R	P
SPC 224 X 10	7	4040	224	233.6	263.5	102	80.8	-
SPC 236 X 2	9	2517	236	245.6	59.5	51	4.3	-
SPC 236 X 3	7	3020	236	245.6	85	51	17	-
SPC 236 X 4	7	3535	236	245.6	110.5	89	10.8	-
SPC 236 X 4 - R	7	3525	236	245.6	110.5	65	22.8	-
SPC 236 X 5	7	3535	236	245.6	136	89	23.5	-
SPC 236 X 5 - R	7	3525	236	245.6	136	65	35.5	-
SPC 236 X 6	7	3535	236	245.6	161.5	89	36.3	-
SPC 236 X 6 - R	7	3525	236	245.6	161.5	65	48.3	-
SPC 236 X 8	7	3535	236	245.6	212.5	89	61.8	-
SPC 236 X 8 - R	7	3525	236	245.6	212.5	65	73.8	-
SPC 236 X 10	7	4040	236	245.6	263.5	102	80.8	-
SPC 250 X 1	10	3020	250	259.6	34	51	-	8.5
SPC 250 X 2	9	3020	250	259.6	59.5	51	4.3	
SPC 250 X 3	7	3020	250	259.6	85	51	17	
SPC 250 X 4	7	3535	250	259.6	110.5	89	10.8	
SPC 250 X 4 - R	7	3525	250	259.6	110.5	65	22.8	-
SPC 250 X 5	7	3535	250	259.6	136	89	23.5	-
SPC 250 X 5 - R	7	3525	250	259.6	136	65	35.5	-
SPC 250 X 6	7	3535	250	259.6	161.5	89	36.3	-
SPC 250 X 6 - R	7	3525	250	259.6	161.5	65	48.3	-
SPC 250 X 8	7	3535	250	259.6	212.5	89	61.8	-
SPC 250 X 8 - R	7	3525	250	259.6	212.5	65	73.8	-
SPC 250 X 10	7	4040	250	259.6	263.5	102	80.8	-
SPC 265 X 2	9	3020	265	274.6	59.5	51	4.3	-
SPC 265 X 3	4	3535	265	274.6	85	89	-	-
SPC 265 X 3 - R	7	3525	265	274.6	85	65	10	-
SPC 265 X 4	7	3535	265	274.6	110.5	89	10.8	-
SPC 265 X 4 - R	7	3525	265	274.6	110.5	65	22.8	-
SPC 265 X 5	7	3535	265	274.6	136	89	23.5	-
SPC 265 X 5 - R	7	3525	265	274.6	136	65	35.5	-
SPC 265 X 6	7	3535	265	274.6	161.5	89	36.3	-
SPC 265 X 6 - R	7	3525	265	274.6	161.5	65	48.3	-
SPC 265 X 8	7	3535	265	274.6	212.5	89	61.8	-
SPC 265 X 8 - R	7	3525	265	274.6	212.5	65	73.8	-
SPC 265 X 10	7	4040	265	274.6	263.5	102	80.8	-
SPC 280 X 2	9	3020	280	289.6	59.5	51	4.3	-
SPC 280 X 3	8	3535	280	289.6	85	89	-	4
SPC 280 X 3 - R	9	3525	280	289.6	85	65	10	-
SPC 280 X 4	9	3535	280	289.6	110.5	89	10.8	-
SPC 280 X 4 - R	9	3525	280	289.6	110.5	65	22.8	-
SPC 280 X 5	9	3535	280	289.6	136	89	23.5	-
SPC 280 X 5 - R	9	3525	280	289.6	136	65	35.5	-
SPC 280 X 6	9	3535	280	289.6	161.5	89	36.3	-
SPC 280 X 6 - R	9	3525	280	289.6	161.5	65	48.3	-

SPC - SECTION continued

Part No.	Type	Bush No.	PD (mm)	OD (mm)	Dimensions (mm)			
					F	L	R	P
SPC 280 X 8	7	3535	280	289.6	212.5	89	61.8	-
SPC 280 X 8 - R	7	3525	280	289.6	212.5	65	73.8	-
SPC 280 X 10	7	4040	280	289.6	263.5	102	80.8	-
SPC 300 X 2	9	3020	300	309.6	59.5	51	4.3	-
SPC 300 X 3	10	3535	300	309.6	85	89	-	2
SPC 300 X 3 - R	9	3525	300	309.6	85	65	10	-
SPC 300 X 4	9	3535	300	309.6	110.5	89	10.8	-
SPC 300 X 4 - R	9	3525	300	309.6	110.5	65	22.8	-
SPC 300 X 5	9	3535	300	309.6	136	89	23.5	-
SPC 300 X 5 - R	9	3525	300	309.6	136	65	35.5	-
SPC 300 X 6	9	3535	300	309.6	161.5	89	36.3	-
SPC 300 X 6 - R	9	3525	300	309.6	161.5	65	48.3	-
SPC 300 X 8	7	4040	300	309.6	212.5	102	55.3	-
SPC 300 X 8 - R	9	3525	300	309.6	212.5	65	73.8	-
SPC 300 X 10	7	4545	300	309.6	263.5	114	74.8	-
SPC 300 X 10 - R	7	4535	300	309.6	263.5	89	87.3	-
SPC 315 X 2	9	3020	315	324.6	59.5	51	4.3	-
SPC 315 X 3	10	3535	315	324.6	85	89	-	2
SPC 315 X 3 - R	9	3525	315	324.6	85	65	10	-
SPC 315 X 4	9	3535	315	324.6	110.5	89	10.8	-
SPC 315 X 4 - R	9	3525	315	324.6	110.5	65	22.8	-
SPC 315 X 5	9	3535	315	324.6	136	89	23.5	-
SPC 315 X 5 - R	9	3525	315	324.6	136	65	35.5	-
SPC 315 X 6	9	3535	315	324.6	161.5	89	36.3	-
SPC 315 X 6 - R	9	3525	315	324.6	161.5	65	48.3	-
SPC 315 X 8	7	4040	315	324.6	212.5	102	55.3	-
SPC 315 X 8 - R	9	3525	315	324.6	212.5	65	73.8	-
SPC 315 X 10	7	4545	315	324.6	263.5	114	74.8	-
SPC 335 X 2	12	3020	335	344.6	59.5	51	4.3	-
SPC 335 X 3	11	3535	335	344.6	85	89	-	2
SPC 335 X 3 - R	12	3525	335	344.6	85	65	10	-
SPC 335 X 4	12	3535	335	344.6	110.5	89	10.8	-
SPC 335 X 4 - R	12	3525	335	344.6	110.5	65	22.8	-
SPC 335 X 5	9	3535	335	344.6	136	89	23.5	-
SPC 335 X 5 - R	9	3525	335	344.6	136	65	35.5	-
SPC 335 X 6	9	3535	335	344.6	161.5	89	36.3	-
SPC 335 X 6 - R	9	3525	335	344.6	161.5	65	48.3	-
SPC 335 X 8	9	4040	335	344.6	212.5	102	55.3	-
SPC 335 X 8 - R	9	3525	335	344.6	212.5	65	73.8	-
SPC 335 X 10	7	4545	335	344.6	263.5	114	74.8	-
SPC 355 X 2	12	3020	355	364.6	59.5	51	4.3	-
SPC 355 X 3	11	3535	355	364.6	85	89	-	2
SPC 355 X 3 - R	12	3525	355	364.6	85	65	10	-
SPC 355 X 4	12	3535	355	364.6	110.5	89	10.8	-
SPC 355 X 4 - R	12	3525	355	364.6	110.5	65	22.8	-

SPC - SECTION continued

Part No.	Type	Bush No.	PD (mm)	OD (mm)	Dimensions (mm)			
					F	L	R	P
SPC 355 X 5	12	3535	355	364.6	136	89	23.5	-
SPC 355 X 5 - R	12	3525	355	364.6	136	65	35.5	-
SPC 355 X 6	9	3535	355	364.6	161.5	89	36.3	-
SPC 355 X 6 - R	9	3525	355	364.6	161.5	65	48.3	-
SPC 355 X 8	9	4040	355	364.6	212.5	102	55.3	-
SPC 355 X 8 - R	9	3525	355	364.6	212.5	65	73.8	-
SPC 355 X 10	7	4040	355	364.6	263.5	102	80.8	-
SPC 375 X 2	12	3020	375	384.6	59.5	51	4.3	
SPC 375 X 3	11	3535	375	384.6	85	89		2
SPC 375 X 3 - R	12	3525	375	384.6	85	65	10	-
SPC 375 X 4	12	3535	375	384.6	110.5	89	10.8	-
SPC 375 X 4 - R	12	3525	375	384.6	110.5	65	22.8	-
SPC 375 X 5	12	3535	375	384.6	136	89	23.5	-
SPC 375 X 5 - R	12	3525	375	384.6	136	65	35.5	-
SPC 375 X 6	9	4040	375	384.6	161.5	102	29.8	-
SPC 375 X 6 - R	9	3525	375	384.6	161.5	65	48.3	-
SPC 375 X 8	9	4545	375	384.6	212.5	114	49.3	-
SPC 375 X 8 - R	9	4030	375	384.6	212.5	76	68.3	-
SPC 375 X 10	9	4545	375	384.6	263.5	114	74.8	-
SPC 375 X 10 - R	9	4535	375	384.6	263.5	89	87.3	-
SPC 375 X 12	7	5050	375	384.6	314.5	127	93.8	-
SPC 400 X 2	11	3525	400	409.6	59.5	64	-	2.3
SPC 400 X 3	11	3535	400	409.6	85	89	-	2
SPC 400 X 3 - R	12	3525	400	409.6	85	65	10	
SPC 400 X 4	12	3535	400	409.6	110.5	89	10.8	
SPC 400 X 4 - R	12	3525	400	409.6	110.5	65	22.8	
SPC 400 X 5	12	3535	400	409.6	136	89	23.5	
SPC 400 X 5 - R	12	3525	400	409.6	136	65	35.5	
SPC 400 X 6	9	4040	400	409.6	161.5	102	29.8	
SPC 400 X 6 - R	9	3525	400	409.6	161.5	65	48.3	
SPC 400 X 8	9	4545	400	409.6	212.5	114	49.3	
SPC 400 X 8 - R	9	4030	400	409.6	212.5	76	68.3	
SPC 400 X 10	9	5050	400	409.6	263.5	127	68.3	
SPC 400 X 10 - R	9	5040	400	409.6	263.5	102	80.8	
SPC 400 X 12	9	5050	400	409.6	314.5	127	93.8	
SPC 425 X 3	11	3535	425	434.6	85	89	-	2
SPC 425 X 3 - R	12	3525	425	434.6	85	65	10	-
SPC 425 X 4	12	3535	425	434.6	110.5	89	10.8	-
SPC 425 X 4 - R	18	3525	425	434.6	110.5	65	10	-
SPC 425 X 5	12	3535	425	434.6	136	89	23.5	-
SPC 425 X 5 - R	18	3525	425	434.6	136	65	10	-
SPC 425 X 6	9	4040	425	434.6	161.5	102	29.8	-
SPC 425 X 6 - R	18	4535	425	434.6	161.5	89	43	-
SPC 425 X 8	9	4545	425	434.6	212.5	114	49.3	-
SPC 425 X 8 - R	19	4535	425	434.6	212.5	89	43	-

SPC - SECTION continued

Part No.	Type	Bush No.	PD (mm)	OD (mm)	Dimensions (mm)			
					F	L	R	P
SPC 425 X 10	9	5050	425	434.6	263.5	127	68.3	-
SPC 425 X 10 - R	9	5040	425	434.6	263.5	102	80.8	-
SPC 450 X 2	11	3535	450	459.6	59.5	89	-	14.8
SPC 450 X 3	11	3535	450	459.6	85	89	-	2
SPC 450 X 3 - R	12	3525	450	459.6	85	65	10	-
SPC 450 X 4	12	3535	450	459.6	110.5	89	10.8	-
SPC 450 X 4 - R	18	3525	450	459.6	110.5	65	1	-
SPC 450 X 5	12	4040	450	459.6	136	102	17	-
SPC 450 X 5 - R	18	3525	450	459.6	136	65	10	-
SPC 450 X 6	9	4545	450	459.6	161.5	114	23.8	-
SPC 450 X 6 - R	18	4535	450	459.6	161.5	89	43	-
SPC 450 X 8	9	5050	450	459.6	212.5	127	42.8	-
SPC 450 X 8 - R	19	4535	450	459.6	212.5	89	43	-
SPC 450 X 10	9	5050	450	459.6	263.5	127	68.3	-
SPC 450 X 10 - R	9	5040	450	459.6	263.5	102	80.8	-
SPC 450 X 12	9	5050	450	459.6	314.5	127	93.8	-
SPC 475 X 3	11	3535	475	484.6	85	89	-	2
SPC 475 X 3 - R	12	3525	475	484.6	85	65	10	-
SPC 475 X 4	12	3535	475	484.6	110.5	89	10.8	-
SPC 475 X 4 - R	18	3525	475	484.6	110.5	65	10	-
SPC 475 X 5	12	4040	475	484.6	136	102	17	-
SPC 475 X 5 - R	18	3525	475	484.6	136	65	10	-
SPC 475 X 6	9	4545	475	484.6	161.5	114	23.8	-
SPC 475 X 6 - R	18	4535	475	484.6	161.5	89	43	-
SPC 475 X 8	9	5050	475	484.6	212.5	127	42.8	-
SPC 475 X 8 - R	18	4535	475	484.6	212.5	89	43	-
SPC 475 X 10	9	5050	475	484.6	263.5	127	68.3	-
SPC 500 X 3	11	3535	500	509.6	85	89	-	2
SPC 500 X 3 - R	12	3525	500	509.6	85	65	10	-
SPC 500 X 4	12	3535	500	509.6	110.5	89	10.8	-
SPC 500 X 4 - R	18	3525	500	509.6	110.5	65	10	-
SPC 500 X 5	12	4040	500	509.6	136	102	17	-
SPC 500 X 5 - R	18	3525	500	509.6	136	65	10	-
SPC 500 X 6	12	4545	500	509.6	161.5	114	23.8	-
SPC 500 X 6 - R	18	4535	500	509.6	161.5	89	43	-
SPC 500 X 8	9	5050	500	509.6	212.5	127	42.8	-
SPC 500 X 8 - R	18	4535	500	509.6	212.5	89	43	-
SPC 500 X 10	9	5050	500	509.6	263.5	127	68.3	-
SPC 500 X 12	9	5050	500	509.6	314.5	127	93.8	-
SPC 530 X 3	11	3535	530	539.6	85	89	-	2
SPC 530 X 3 - R	12	3525	530	539.6	85	65	10	-
SPC 530 X 4	12	4040	530	539.6	110.5	102	4.3	-
SPC 530 X 4 - R	18	3525	530	539.6	110.5	65	10	-
SPC 530 X 5	12	4545	530	539.6	136	114	11	-
SPC 530 X 5 - R	18	4535	530	539.6	136	89	43	-

SPC - SECTION continued



Part No.	Type	Bush No.	Bush No.	Type	Dimensions (mm)			
					F	L	R	P
SPC 530 X 6	12	5050	530	539.6	161.5	127	17.3	-
SPC 530 X 6 - R	18	4535	530	539.6	161.5	89	43	-
SPC 530 X 8	9	5050	530	539.6	212.5	127	42.8	-
SPC 530 X 8 - R	18	4535	530	539.6	212.5	89	43	-
SPC 530 X 10	9	5050	530	539.6	263.5	127	68.3	-
SPC 560 X 2	11	3535	560	569.6	59.5	89	-	14.8
SPC 560 X 3	11	3535	560	569.6	85	89	-	2
SPC 560 X 3 - R	12	3525	560	569.6	85	65	10	-
SPC 560 X 4	12	4040	560	569.6	110.5	102	4.3	-
SPC 560 X 4 - R	18	3525	560	569.6	110.5	65	10	-
SPC 560 X 5	12	4545	560	569.6	136	114	11	-
SPC 560 X 5 - R	18	4535	560	569.6	136	89	43	-
SPC 560 X 6	12	5050	560	569.6	161.5	127	17.3	-
SPC 560 X 6 - R	18	4535	560	569.6	161.5	89	43	-
SPC 560 X 8	12	5050	560	569.6	212.5	127	42.8	-
SPC 560 X 8 - R	18	5040	560	569.6	212.5	89	43	-
SPC 560 X 10	12	5050	560	569.6	263.5	127	68.3	-
SPC 560 X 10 - R	12	5040	560	569.6	263.5	102	80.8	-
SPC 560 X 12	12	5050	560	569.6	314.5	127	93.8	-
SPC 630 X 3	11	4040	630	639.6	85	102	-	8.5
SPC 630 X 3 - R	12	4030	630	639.6	85	76	4.5	-
SPC 630 X 4	11	4545	630	639.6	110.5	114	-	1.8
SPC 630 X 4 - R	18	4030	630	639.6	110.5	76	4.5	-
SPC 630 X 5	12	5050	630	639.6	136	127	4.5	-
SPC 630 X 5 - R	18	4535	630	639.6	136	89	36.5	-
SPC 630 X 6	12	5050	630	639.6	161.5	127	17.3	-
SPC 630 X 6 - R	12	4535	630	639.6	161.5	89	36.3	-
SPC 630 X 8	12	5050	630	639.6	212.5	127	42.8	-
SPC 630 X 8 - R	18	4535	630	639.6	212.5	89	36.5	-
SPC 630 X 10	12	5050	630	639.6	263.5	127	68.3	-
SPC 630 X 12	12	5050	630	639.6	314.5	127	93.8	-
SPC 710 X 3	11	4040	710	719.6	85	102	-	-
SPC 710 X 3 - R	12	4030	710	719.6	85	76	4.5	-
SPC 710 X 4	12	4040	710	719.6	110.5	102	4.3	-
SPC 710 X 4 - R	12	4030	710	719.6	110.5	76	17.3	-
SPC 710 X 5	12	5050	710	719.6	136	127	4.5	-
SPC 710 X 5 - R	12	5040	710	719.6	136	102	17	-
SPC 710 X 6	12	5050	710	719.6	161.5	127	17.3	-
SPC 710 X 6 - R	12	5040	710	719.6	161.5	102	29.8	-
SPC 710 X 8	12	5050	710	719.6	212.5	127	42.8	-
SPC 710 X 8 - R	12	5040	710	719.6	212.5	102	55.3	-
SPC 710 X 10	12	5050	710	719.6	263.5	127	68.3	-
SPC 710 X 12	12	5050	710	719.6	314.5	127	93.8	-
SPC 800 X 3	11	4545	800	809.6	85	114	-	14.5
SPC 800 X 3 - R	11	4535	800	809.6	85	89	-	2

SPC - SECTION continued

Part No.	Type	Bush No.	PD (mm)	OD (mm)	Dimensions (mm)			
					F	L	R	P
SPC 800 X 4	11	5050	800	809.6	110.5	127	-	8.3
SPC 800 X 4 - R	12	5040	800	809.6	110.5	102	4.3	-
SPC 800 X 5	12	5050	800	809.6	136	127	4.5	-
SPC 800 X 5 - R	12	5040	800	809.6	136	102	17	-
SPC 800 X 6	12	5050	800	809.6	161.5	127	17.3	-
SPC 800 X 6 - R	12	5040	800	809.6	161.5	102	29.8	-
SPC 800 X 8	12	5050	800	809.6	212.5	127	42.8	-
SPC 800 X 8 - R	12	5040	800	809.6	212.5	102	55.3	-
SPC 800 X 10	12	5050	800	809.6	263.5	127	68.3	-
SPC 800 X 10 - R	12	5040	800	809.6	263.5	102	80.8	-
SPC 800 X 12	12	5050	800	809.6	314.5	127	93.8	-
SPC 1000 X 3	11	5050	1000	1009.6	85	127	-	21
SPC 1000 X 3 - R	11	5040	1000	1009.6	85	102	-	8.5
SPC 1000 X 4	11	5050	1000	1009.6	110.5	127	-	8.3
SPC 1000 X 4 - R	12	5040	1000	1009.6	110.5	102	4.3	-
SPC 1000 X 5	12	5050	1000	1009.6	136	127	4.5	-
SPC 1000 X 5 - R	12	5040	1000	1009.6	136	102	17	-
SPC 1000 X 6	12	5050	1000	1009.6	161.5	127	17.3	-
SPC 1000 X 6 - R	12	5040	1000	1009.6	161.5	102	29.8	-
SPC 1000 X 8	12	5050	1000	1009.6	212.5	127	42.8	-
SPC 1000 X 8 - R	12	5040	1000	1009.6	212.5	102	55.3	-
SPC 1000 X 10	12	5050	1000	1009.6	263.5	127	68.3	-
SPC 1000 X 12	12	6050	1000	1009.6	314.5	127	93.8	-
SPC 1250 X 3	11	5050	1250	1259.6	85	127	-	21
SPC 1250 X 4	11	5050	1250	1259.6	110.5	127	-	8.3
SPC 1250 X 5	12	5050	1250	1259.6	136	127	4.5	-
SPC 1250 X 5 - R	12	5040	1250	1259.6	136	102	17	-
SPC 1250 X 6	12	5050	1250	1259.6	161.5	127	17.3	-
SPC 1250 X 6 - R	12	5040	1250	1259.6	161.5	102	29.8	-
SPC 1250 X 8	12	5050	1250	1259.6	212.5	127	42.8	-
SPC 1250 X 8 - R	12	5040	1250	1259.6	212.5	102	55.3	-
SPC 1250 X 10	12	5050	1250	1259.6	263.5	127	68.3	-




ENGINEERING DATA V-PULLEYS PILOT BORE

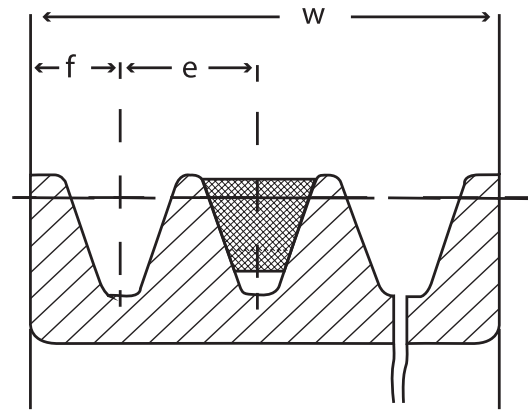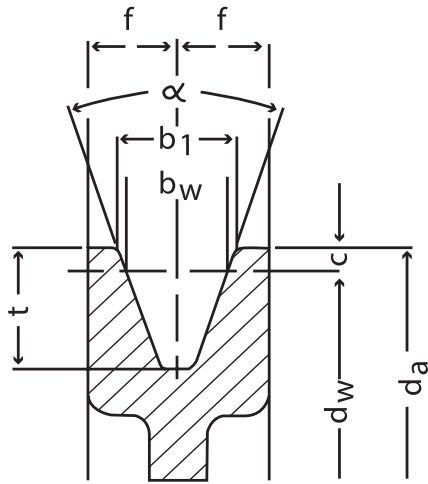

COMPLYING TO DIN 2211

Sections		SPZ (mm)	SPA (mm)	SPB (mm)	SPC (mm)
b _w (mm)		8.5	11	14	19
b ₁ (mm)		9.7	12.7	16.3	22
c (mm)		2	2.8	3.5	4.8
e (mm)		12 ± 0.3	15 ± 0.3	. 19 ± 0.4	25.5 ± 0.5
f (mm)		8 ± 0.6	10 ± 0.6	12.5 ± 0.8	17 ± 1
t (mm) min.		11	13.8	17.5	C:20 SPC:23.8
α 34° for dw (mm) 34° Tolerance		≤ 80	≤ 118	≤ 190	≤ 315
		>80	>118	>190	>315
		± 1°	± 1°	± 1°	± 30°
Crown width W for number of grooves Z (mm)	Z = 1	16	20	25	34
	Z = 2	28	35	44	59.5
	Z = 3	40	50	63	85
	Z = 4	52	65	82	110.5
	Z = 5	64	80	101	136
	Z = 6	76	95	120	161.5
	Z = 7	88	110	139	187
	Z = 8	100	125	158	212.5
	Z = 9	112	140	177	238
	Z =10	124	155	196	263.5
	Z = 11	136	170	215	289
	Z = 12	148	185	234	314.5
Tolerance di (Z-1) e (mm)		± 0.6	± 0.6	± 0.8	±1.0

V-PULLEY TYPES PILOT BORE

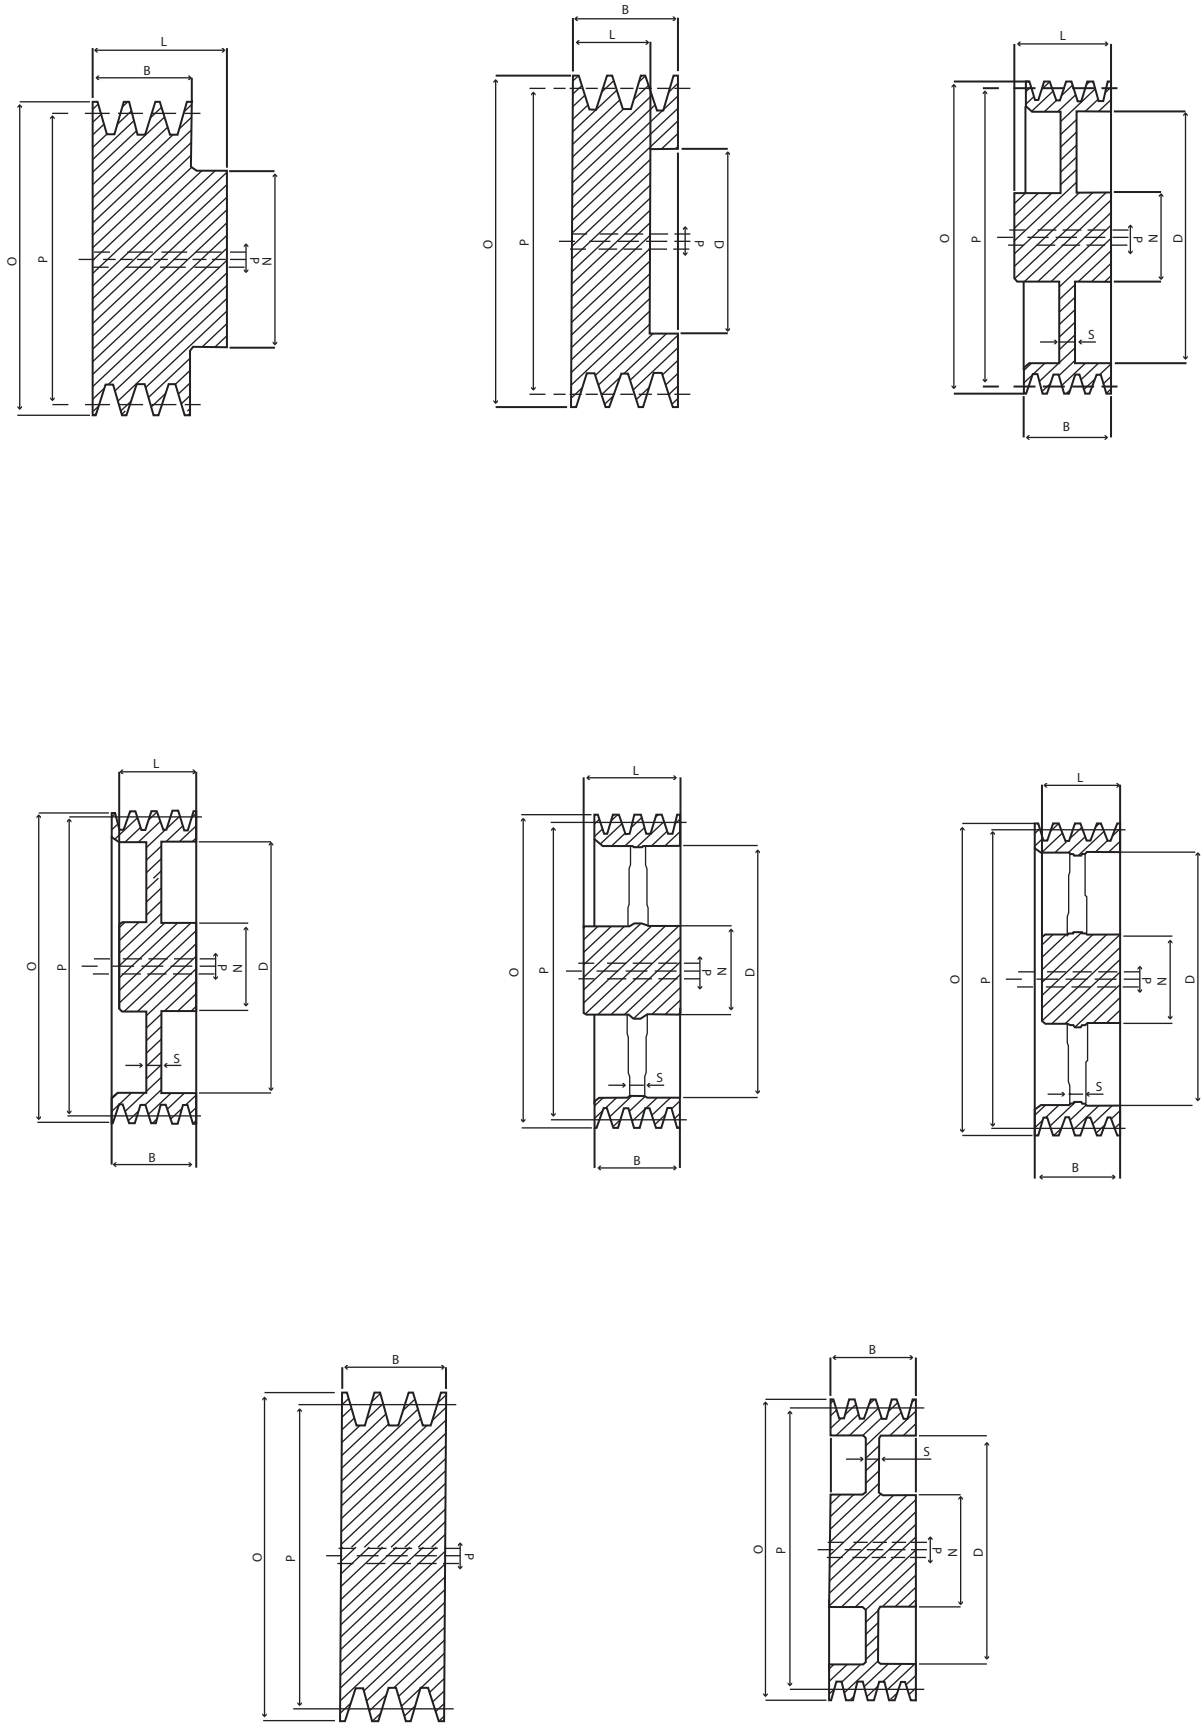



V PULLEYS



V-PULLEYS PILOT BORE

Description

Dunlop V-pulleys are manufactured from cast iron EN-GJL-200 UNI EN1561 and are black phosphated according to ISO 4183 and DIN 2211-3 norms. All pulleys are statically balanced for peripheral speeds up to 35 m/sec.

V-Pulleys are available to suit all V & wedge belts cross sections Z, A, B, C, SPZ, SPA, SPB & SPC and are available from stock in both taper and pilot bore options.

Part numbers are identified by 3 letters (e.g. SPA) which represents the belt cross section, a 3 or 4 digit number (e.g. 250) the pulleys pitch diameter and a 1 or 2 digit number (e.g. 3) the number of grooves/belts to be run in the drive, for example SPA250/3.

SPZ - SECTION

Pitch Diameter dw (mm)	Grooves No.	N	L (mm)	W (mm)	Type
SPZ 50X1	1	40	28	16	1
SPZ 50X2	2	40	35	28	1
SPZ 50X3	3			40	7
SPZ 56X1	1	45	28	16	1
SPZ 56X2	2	45	35	28	1
SPZ 56X3	3			40	7
SPZ 63X1	1	50	28	16	1
SPZ 63X2	2	50	35	28	1
SPZ 63X3	3			40	7
SPZ 71X1	1	50	28	16	1
SPZ 71X2	2	55	35	28	1
SPZ 71X3	3			40	7
SPZ 75X1	1	50	28	16	1
SPZ 75X2	2	60	35	28	1
SPZ 75X3	3			40	7
SPZ 80X1	1	50	28	16	1
SPZ 80X2	2	60	35	28	1
SPZ 80X3	3			40	7
SPZ 85X1	1	50	28	16	1
SPZ 85X2	2	60	35	28	1
SPZ 85X3	3			40	7
SPZ 90X1	1	50	28	16	1
SPZ 90X2	2	60	35	28	1
SPZ 90X3	3			40	7
SPZ 95X1	1	50	28	16	1
SPZ 95X2	2	60	35	28	1
SPZ 95X3	3			40	7
SPZ 100X1	1	50	28	16	1
SPZ 100X2	2	60	35	28	1
SPZ 100X3	3			40	7
SPZ 106X1	1	50	28	16	1
SPZ 106X2	2	60	35	28	1
SPZ 106X3	3			40	7
SPZ 112X1	1	50	28	16	1

Pitch Diameter dw (mm)	Grooves No.	N	L (mm)	W (mm)	Type
SPZ 112X2	2	60	35	28	1
SPZ 112X3	3			40	7
SPZ 118X1	1	50	28	16	3
SPZ 118X2	2	60	35	28	3
SPZ 118X3	3			40	7
SPZ 125X1	1	50	28	16	3
SPZ 125X2	2	60	35	28	3
SPZ 125X3	3			40	7
SPZ 132X1	1	50	28	16	3
SPZ 132X2	2	60	40	28	3
SPZ 132X3	3	60	40	40	8
SPZ 140X1	1	50	28	16	3
SPZ 140X2	2	60	40	28	3
SPZ 140X3	3	60	40	40	8
SPZ 150X1	1	50	28	16	3
SPZ 150X1	2	60	40	28	3
SPZ 150X3	3	60	40	40	8
SPZ 160X1	1	55	32	16	3
SPZ 160X2	2	60	40	28	3
SPZ 160X3	3	65	45	40	3
SPZ 180X1	1	55	32	16	5
SPZ 180X2	2	60	40	28	5
SPZ 180X3	3	65	45	40	5
SPZ 200X1	1	55	32	16	5
SPZ 200X2	2	60	40	28	5
SPZ 200X3	3	65	45	40	5
SPZ 224X1	1	55	32	16	5
SPZ 224X2	2	60	40	28	5
SPZ 224X3	3	65	45	40	5
SPZ 250X1	1	55	32	16	5
SPZ 250X2	2	60	40	28	5
SPZ 250X3	3	65	45	40	5
SPZ 280X2	2	65	45	28	5
SPZ 315X2	2	65	45	28	5

SPA- SECTION

Pitch Diameter dw (mm)	Grooves No.	N	L (mm)	W (mm)	Type
SPA 40X1	1	40	35	20	1
SPA 50X1	1	40	35	20	1
SPA 50X2	2	40	45	35	1
SPA 56X1	1	40	35	20	1
SPA 56X2	2	40	45	35	1
SPA 56X3	3			50	7
SPA 60X1	1	40	35	20	1
SPA 63X1	1	40	35	20	1
SPA 63X2	2	40	45	35	1
SPA 63X3	3			50	7
SPA 71X1	1	40	40	20	1
SPA 71X2	2	50	45	35	1
SPA 71X3	3			50	7
SPA 75X1	1	40	40	20	1
SPA 75X2	2	50	45	35	1
SPA 75X3	3			50	7
SPA 75X4	4			65	7
SPA 75X5	5			80	7
SPA 80X1	1	45	40	20	1
SPA 80X2	2	50	45	35	1
SPA 80X3	3			50	7
SPA 80X4	4			65	7
SPA 80X5	5			80	7
SPA 85X1	1	45	40	20	1
SPA 85X2	2	50	45	35	1
SPA 85X3	3			50	7
SPA 85X4	4			65	7
SPA 85X5	5			80	7
SPA 90X1	1	45	40	20	1
SPA 90X2	2	60	45	35	1
SPA 90X3	3			50	7
SPA 90X4	4			65	7
SPA 90X5	5			80	7
SPA 95X1	1	45	40	20	1
SPA 95X2	2	60	45	35	1
SPA 95X3	3			50	7
SPA 95X4	4			65	7
SPA 95X5	5			80	7
SPA 100X1	1	48	40	20	1
SPA 100X2	2	60	45	35	1
SPA 100X3	3			50	7
SPA 100X4	4		52	65	2
SPA 100X5	5		52	80	2

Pitch Diameter dw (mm)	Grooves No.	N	L (mm)	W (mm)	Type
SPA 106X1	1	48	40	20	1
SPA 106X2	2	60	45	35	1
SPA 106X3	3			50	7
SPA 106X5	5		52	80	2
SPA 112X1	1	48	40	20	1
SPA 112X2	2	60	45	35	1
SPA 112X3	3			50	7
SPA 112X4	4		52	65	2
SPA 112X5	5		52	80	2
SPA 118X1	1	60	40	20	1
SPA 118X2	2	60	45	35	1
SPA 118X3	3			50	7
SPA 118X4	4		52	65	2
SPA 118X5	5		52	80	2
SPA 125X1	1	60	40	20	1
SPA 125X2	2	60	45	35	1
SPA 125X3	3			50	7
SPA 125X4	4		52	65	2
SPA 132X1	1	60	40	20	1
SPA 132X2	2	60	45	35	1
SPA 132X3	3			50	7
SPA 132X4	4		52	65	2
SPA 132X5	5		52	80	2
SPA 140X1	1	60	40	20	3
SPA 140X2	2	60	45	35	3
SPA 140X3	3	65	52	50	3
SPA 140X4	4		52	65	2
SPA 140X5	5		52	80	2
SPA 150X1	1	60	40	20	3
SPA 150X2	2	60	45	35	3
SPA 150X3	3	65	52	50	3
SPA 150X4	4		52	65	2
SPA 150X5	5		52	80	2
SPA 160X1	1	60	40	20	3
SPA 160X2	2	60	45	35	3
SPA 160X3	3	70	52	50	3
SPA 160X4	4	70	52	65	4
SPA 160X5	5	80	52	80	4
SPA 170X1	1	60	40	20	3
SPA 170X2	2	60	45	35	3
SPA 170X3	3	70	52	50	3
SPA 170X4	4	80	60	65	4
SPA 170X5	5	80	65	80	4

SPA - SECTION

Pitch Diameter dw (mm)	Grooves No.	N	L (mm)	W (mm)	Type
SPA 180X1	1	65	40	20	3
SPA 180X2	2	70	50	35	3
SPA 180X3	3	70	52	50	3
SPA 180X4	4	80	60	65	4
SPA 180X5	5	80	65	80	4
SPA 190X2	1	70	50	35	3
SPA 190X3	2	70	52	50	3
SPA 190X4	3	80	60	65	4
SPA 200X1	1	65	45	20	3
SPA 200X2	2	70	50	35	3
SPA 200X3	3	70	52	50	3
SPA 200X4	4	80	60	65	4
SPA 200X5	5	80	65	80	4
SPA 212X1	1	65	40	20	3
SPA 212X1	2	70	45	35	3
SPA 224X1	1	65	45	20	3
SPA 224X2	2	70	50	35	3
SPA 224X3	3	80	52	50	3
SPA 224X4	4	90	60	65	4
SPA 224X5	5	90	65	80	4
SPA 236X1	1		50	20	3
SPA 236X2	2		60	35	3
SPA 250X1	1	75	50	20	3
SPA 250X2	2	75	50	35	3
SPA 250X3	3	80	60	50	3
SPA 250X4	4	90	65	65	3
SPA 250X5	5	90	65	80	4
SPA 280X1	1	75	50	20	5
SPA 280X2	2	80	50	35	5
SPA 280X3	3	80	60	50	5
SPA 280X4	4	90	65	65	5
SPA 300X1	1	75	50	20	5
SPA 300X2	2	80	50	35	5
SPA 300X3	3	80	60	50	5
SPA 300X4	4	90	65	65	5
SPA 300X5	5	100	65	80	6
SPA 315X1	1	75	60	20	5
SPA 315X2	2	80	50	35	5
SPA 315X3	3	90	60	50	5
SPA 315X4	4	90	65	65	5
SPA 315X5	5	100	65	80	6
SPA 355X1	1	75	50	20	5
SPA 355X2	2	80	50	35	5

Pitch Diameter dw (mm)	Grooves No.	N	L (mm)	W (mm)	Type
SPA 355X3	3	90	60	50	5
SPA 355X4	4	90	65	65	5
SPA 355X5	5	100	65	80	6
SPA 400X1	1	90	50	20	5
SPA 400X2	2	90	50	35	5
SPA 400X3	3	100	60	50	5
SPA 400X4	4	100	65	65	5
SPA 400X5	5	100	65	80	6
SPA 450X1	1	90	50	20	5
SPA 450X2	2	100	50	35	5
SPA 450X3	3	100	60	50	5
SPA 450X4	4	105	65	65	6
SPA 450X5	5	105	65	80	6
SPA 500X1	1	90	50	20	5
SPA 500X2	2	100	50	35	5
SPA 500X3	3	105	60	50	5
SPA 500X4	4	105	65	65	6
SPA 500X5	5	110	65	80	6
SPA 560X1	1	100	50	20	5
SPA 560X2	2	100	50	35	5
SPA 560X3	3	120	65	50	5
SPA 560X4	4	120	65	65	5
SPA 560X5	5	120	80	80	5
SPA 560X5	6	120	80	95	6
SPA 630X1	1	100	50	20	5
SPA 630X2	2	110	50	35	5
SPA 630X3	3	120	65	50	5
SPA 630X4	4	120	65	65	5
SPA 630X5	5	120	80	80	5
SPA 630X6	6	120	80	95	6

SPB - SECTION

Pitch Diameter dw (mm)	Grooves No.	N	L (mm)	W (mm)	Type
SPB 63X1	1	45	45	25	1
SPB 70X1	1	45	45	25	1
SPB 70X2	2	45	55	44	1
SPB 71X3	3			63	7
SPB 80X1	1	50	45	25	1
SPB 80X2	2	50	55	44	1
SPB 80X3	3			25	1
SPB 80X4	4			44	1
SPB 80X5	5			63	7

SPB - SECTION

Pitch Diameter dw (mm)	Grooves No.	N	L (mm)	W (mm)	Type
SPB 85X1	1	50	45	25	1
SPB 85X2	2	50	55	44	1
SPB 85X3	3			63	7
SPB 90X1	1	50	45	25	1
SPB 90X2	2	50	55	44	1
SPB 90X3	3			63	7
SPB 90X4	4			82	7
SPB 90X5	5			101	7
SPB 95X1	1	50	45	25	1
SPB 100X1	1	52	45	25	1
SPB 100X2	2	55	55	44	1
SPB 100X3	3			63	7
SPB 100X4	4			82	7
SPB 100X5	5			101	7
SPB 106X1	1		45	25	1
SPB 106X2	2		55	44	1
SPB 112X1	1	55	45	25	1
SPB 112X2	2	60	55	44	1
SPB 112X3	3			63	7
SPB 112X4	4			82	7
SPB 112X5	5			101	7
SPB 118X1	1	55	45	25	1
SPB 118X2	2	60	55	44	1
SPB 118X3	3			63	7
SPB 118X4	4			82	7
SPB 118X5	5			101	7
SPB 118X6	6			120	7
SPB 120X1	1	55	45	25	1
SPB 120X2	2	60	55	44	1
SPB 120X3	3			63	7
SPB 120X4	4			82	7
SPB 120X5	5			101	7
SPB 120X6	6			120	7
SPB 125X1	1	58	45	25	1
SPB 125X2	2	60	55	44	1
SPB 125X3	3		60	63	2
SPB 125X4	4		60	82	2
SPB 125X5	5		60	101	2
SPB 125X6	6		60	120	2
SPB 132X1	1	60	45	25	1
SPB 132X2	2	60	55	44	1
SPB 132X3	3		60	63	2
SPB 132X4	4		60	82	2

Pitch Diameter dw (mm)	Grooves No.	N	L (mm)	W (mm)	Type
SPB 132X5	5		60	101	2
SPB 132X6	6		60	120	2
SPB 140X1	1	65	45	25	1
SPB 140X2	2	65	55	44	1
SPB 140X3	3		60	63	2
SPB 140X4	4		60	82	2
SPB 140X5	5		60	101	2
SPB 140X6	6		60	120	2
SPB 150X1	1	65	45	25	1
SPB 150X2	2	65	55	44	1
SPB 150X3	3		60	63	2
SPB 150X4	4		60	82	2
SPB 150X5	5		60	101	2
SPB 150X6	6		60	120	2
SPB 160X1	1	65	45	25	3
SPB 160X2	2	70	55	44	3
SPB 160X3	3		60	63	2
SPB 160X4	4		60	82	2
SPB 160X5	5		60	101	2
SPB 160X6	6		65	120	2
SPB 170X1	1	65	45	25	3
SPB 170X2	2	70	55	44	3
SPB 170X3	3	70	60	63	4
SPB 170X4	4	70	60	82	4
SPB 170X5	5	70	60	101	4
SPB 170X6	6	70	65	120	4
SPB 180X1	1	65	45	25	3
SPB 180X2	2	70	55	44	3
SPB 180X3	3	80	60	63	4
SPB 180X4	4	80	60	82	4
SPB 180X5	5	80	70	101	4
SPB 180X6	6	80	70	120	4
SPB 190X1	1	65	45	25	3
SPB 190X2	2	70	55	44	3
SPB 200X1	1	70	45	25	3
SPB 200X2	2	70	55	44	3
SPB 200X3	3	80	60	63	4
SPB 200X4	4	88	60	82	4
SPB 200X5	5	96	70	101	4
SPB 200X6	6	96	70	120	4
SPB 212X1	1	70	45	25	3
SPB 212X2	2	77	55	44	3
SPB 212X3	3	80	60	63	4

SPB - SECTION continued

Pitch Diameter dw (mm)	Grooves No.	N	L (mm)	W (mm)	Type
SPB 212X4	4	88	60	82	4
SPB 212X5	5	96	70	101	4
SPB 212X6	6	104	80	120	4
SPB 224X1	1	70	45	25	3
SPB 224X2	2	77	55	44	3
SPB 224X3	3	80	60	63	4
SPB 224X4	4	88	60	82	4
SPB 224X5	5	96	70	101	4
SPB 224X6	6	104	80	120	4
SPB 250X1	1	70	50	25	3
SPB 250X2	2	77	55	44	3
SPB 250X3	3	80	60	63	4
SPB 250X4	4	96	65	82	4
SPB 250X5	5	104	75	101	4
SPB 250X6	6	104	80	120	4
SPB 280X1	1	76	50	25	3
SPB 280X2	2	80	55	44	3
SPB 280X3	3	90	60	63	4
SPB 280X4	4	96	65	82	4
SPB 280X5	5	104	75	101	4
SPB 280X6	6	104	80	120	4
SPB 300X1	1	76	50	25	3
SPB 300X2	2	80	55	44	3
SPB 300X3	3	90	60	63	4
SPB 300X4	4	96	65	82	4
SPB 300X5	5	104	75	101	4
SPB 300X6	6	104	80	120	4
SPB 315X1	1	76	50	25	5
SPB 315X2	2	88	60	44	5
SPB 315X3	3	90	60	63	6
SPB 315X4	4	96	65	82	6
SPB 315X5	5	104	75	101	6
SPB 315X6	6	120	90	120	6
SPB 355X1	1	80	50	25	5
SPB 355X2	2	88	60	44	5
SPB 355X3	3	92	60	63	6
SPB 355X4	4	96	65	82	6
SPB 355X5	5	104	75	101	6
SPB 355X6	6	120	90	120	6
SPB 400X1	1	85	55	25	5
SPB 400X2	2	88	60	44	5
SPB 400X3	3	96	65	63	5
SPB 400X4	4	104	75	82	6

Pitch Diameter dw (mm)	Grooves No.	N	L (mm)	W (mm)	Type
SPB 400X5	5	112	85	101	6
SPB 400X6	6	120	100	120	6
SPB 425X3	3	96	65	63	5
SPB 425X4	4	104	75	82	6
SPB 425X5	5	112	85	101	6
SPB 450X1	1	90	60	25	5
SPB 450X2	2	90	60	44	5
SPB 450X3	3	96	65	63	5
SPB 450X4	4	104	75	82	6
SPB 450X5	5	112	85	101	6
SPB 450X6	6	120	100	120	6
SPB 500X1	1	100	60	25	5
SPB 500X2	2	100	65	44	5
SPB 500X3	3	104	75	63	5
SPB 500X4	4	112	85	82	5
SPB 500X5	5	120	90	101	6
SPB 500X6	6	128	105	120	6
SPB 600X1	1	100	60	25	5
SPB 600X2	2	100	65	44	5
SPB 600X3	3	104	75	63	5
SPB 600X4	4	115	85	82	5
SPB 600X5	5	120	90	101	6
SPB 600X6	6	129	105	120	6
SPB 630X1	1	100	60	25	5
SPB 630X2	2	100	65	44	5
SPB 630X3	3	105	75	63	5
SPB 630X4	4	120	85	82	5
SPB 630X5	5	128	90	101	6
SPB 630X6	6	140	105	120	6

SPC - SECTION

Pitch Diameter dw (mm)	Grooves No.	N	L (mm)	W (mm)	Type
SPC 100X1	1	60	50	34.0	1
SPC 120X1	1	65	50	34.0	1
SPC 120X2	2			59.5	7
SPC 140X1	1	70	50	34.0	1
SPC 140X2	2			59.5	7
SPC 140X3	3		65	85.0	2
SPC 140X4	4		80	110.5	2
SPC 150X1	1	70	50	34.0	1
SPC 150X2	2			59.5	7
SPC 150X3	3		65	85.0	2

SPC - SECTION continued

Pitch Diameter dw (mm)	Grooves No.	N	L (mm)	W (mm)	Type
SPC 150X4	4		80	110.5	2
SPC 150X5	5		96	136.0	2
SPC 160X1	1	72	50	34.0	1
SPC 160X2	2			59.5	7
SPC 160X3	3		65	85.0	2
SPC 160X4	4		80	110.5	2
SPC 160X5	5		96	136.0	2
SPC 160X6	6		96	161.5	2
SPC 180X1	1	76	50	34.0	3
SPC 180X2	2	80		59.5	8
SPC 180X3	3	82	65	85.0	4
SPC 180X4	4	82	80	110.5	4
SPC 180X5	5	82	96	136.0	4
SPC 180X6	6	82	96	161.5	4
SPC 200X1	1	76	50	34.0	3
SPC 200X2	2	80	60	59.5	3
SPC 200X3	3	86	65	85.0	4
SPC 200X4	4	90	90	110.5	4
SPC 200X5	5	90	100	136.0	4
SPC 200X6	6	90	100	161.5	4
SPC 224X1	1	86	50	34.0	3
SPC 224X2	2	88	60	59.5	3
SPC 224X3	3	90	70	85.0	4
SPC 224X4	4	90	90	110.5	4
SPC 224X5	5	90	100	136.0	4
SPC 224X6	6	90	100	161.5	4
SPC 250X1	1	86	50	34.0	3
SPC 250X2	2	92	60	59.5	3
SPC 250X3	3	92	70	85.0	4
SPC 250X4	4	100	90	110.5	4
SPC 250X5	5	102	100	136.0	4
SPC 250X6	6	102	100	161.0	4
SPC 280X1	1	86	50	34.0	3
SPC 280X2	2	92	60	59.5	3
SPC 280X3	3	92	70	85.0	4
SPC 280X4	4	100	90	110.5	4
SPC 280X5	5	102	100	136.0	4
SPC 280X6	6	102	100	161.5	4
SPC 300X1	1	86	50	34.0	3
SPC 300X2	2	92	60	59.5	3
SPC 300X3	3	92	70	85.0	4
SPC 300X4	4	100	90	110.5	4
SPC 300X5	5	104	100	136.0	4

Pitch Diameter dw (mm)	Grooves No.	N	L (mm)	W (mm)	Type
SPC 300X6	6	104	100	161.5	4
SPC 315X1	1	92	50	34.0	5
SPC 315X2	2	92	60	59.5	5
SPC 315X3	3	92	70	85.0	6
SPC 315X4	4	110	90	110.5	4
SPC 315X5	5	112	100	136.0	4
SPC 315X6	6	112	100	161.5	4
SPC 335X1	1	100	50	34.0	5
SPC 335X2	2	100	60	59.5	5
SPC 335X3	3	100	70	85.0	6
SPC 335X4	4	114	90	110.5	6
SPC 335X5	5	114	100	136.0	6
SPC 335X6	6	114	100	161.5	6
SPC 355X1	1	110	50	34.0	5
SPC 355X2	2	110	60	59.5	5
SPC 355X3	3	110	70	85.0	6
SPC 355X4	4	114	90	110.5	6
SPC 355X5	5	114	100	136.0	6
SPC 355X6	6	114	100	161.5	6
SPC 400X1	1	110	60	34.0	5
SPC 400X2	2	110	70	59.5	5
SPC 400X3	3	114	90	85.0	5
SPC 400X4	4	114	90	110.5	6
SPC 400X5	5	120	100	136.0	6
SPC 400X6	6	120	100	161.5	6
SPC 450X1	1	110	60	34.0	5
SPC 450X2	2	110	70	59.5	5
SPC 450X3	3	114	90	85.0	5
SPC 450X4	4	120	90	110.5	6
SPC 450X5	5	120	100	136.0	6
SPC 450X6	6	120	100	161.5	6
SPC 500X1	1	114	60	34.0	5
SPC 500X2	2	114	70	59.5	5
SPC 500X3	3	114	90	85.0	5
SPC 500X4	4	126	90	110.5	6
SPC 500X5	5	126	100	136.0	6
SPC 500X6	6	126	100	161.5	6
SPC 560X1	1	114	60	34.0	5
SPC 560X2	2	114	70	59.5	5
SPC 560X3	3	114	90	85.0	5
SPC 560X4	4	130	100	110.5	6
SPC 560X5	5	130	100	136.0	6
SPC 560X6*	6	130	100	161.5	6

*Please enquire for product codes SPC600 to SPC630